



2020/2021



Campagnolo[®]

CAMPAGNOLO

MOVEMENT FOR WINNERS



RICHARD CARAPAZ (MOVISTAR TEAM)
WINNER OF THE 2019 GIRO D'ITALIA
WITH CAMPAGNOLO GROUPSET AND WHEELS



 **Victor CAMPENAERTS**
16th APRIL 2019 | AGUASCALIENTES (MEX)

The quest for great victories has always pushed us to create transmissions and wheels of the finest quality and capable of race-winning performance.

The 12x2 Speed Super Record™ EPS™ electronic groupset, alongside the new Bora™ WTO wheels represent the most recent developments in Campagnolo's historic mission to improve the cycling experience.

Campagnolo, passion and innovation for great victories!



GROUPSETS

WHEELS

TRIATHLON / TT

PISTA






TECH DATA

INDEX

CAMPAGNOLO® E-STORE			4
GROUPSET TECHNOLOGIES			6
SUPER RECORD™ EPS™	12x2 Speed	Disc Brake - Rim Brake	82 - 84
SUPER RECORD™	12x2 Speed	Disc Brake - Rim Brake	86 - 88
RECORD™	12x2 Speed	Disc Brake - Rim Brake	90 - 92
CHORUS™	12x2 Speed	Disc Brake - Rim Brake	94 - 96
POTENZA 11™	11x2 Speed	Disc Brake - Rim Brake	98 - 100
CENTAUR™	11x2 Speed	Rim Brake	102 - 104
WHEEL TECHNOLOGIES			106
AERO CARBON WHEELS			130
BORA™ ULTRA™ TT		Rim Brake	131
BORA™ WTO 77		Rim Brake	132
BORA™ WTO 60		Rim Brake	133
BORA™ WTO 45		Disc Brake - Rim Brake	134 - 135
BORA™ WTO 33		Disc Brake - Rim Brake	136 - 137
PERFORMANCE CARBON WHEELS			138
BORA™ ULTRA™ 50		Rim Brake	140
BORA™ ULTRA™ 35		Rim Brake	141
BORA™ ONE™ 50		Disc Brake - Rim Brake	142 - 143
BORA™ ONE™ 35		Disc Brake - Rim Brake	144 - 145
ALUMINIUM WHEELS			146
SHAMAL™ MILLE		Rim Brake	147
SHAMAL™ ULTRA™		Disc Brake - Rim Brake	148 - 149
ZONDA™		Disc Brake - Rim Brake	150 - 151
SCIROCCO™		Disc Brake - Rim Brake	152 - 153
KHAMSIN™		Rim Brake	154
CALIMA™		Rim Brake	155
COMPONENTS			156
BORA™ ULTRA™ TT		Rim Brake	160
SUGGESTED WHEELS			161
WHEELS			162
GHIBLI™			164
BORA™ ULTRA™ 80			165
GROUPSETS			168
WHEELS			180
SERVICE CENTER - SALES NETWORK			186

E-STORE CAMPAGNOLO®

As the hashtag says, #thoseintheknow choose Campagnolo® and those that choose Campagnolo® do so not only because they are sure of getting their hands on some of the most performance oriented, reliable and sophisticated componentry for cycling available but also due to what Campagnolo® represents. Products made with passion that exude a pure and authentic cycling tradition will give a definite race winning advantage but also communicate that the rider is one who takes a great deal of pride in his cycling and expects something more from his time in the saddle.

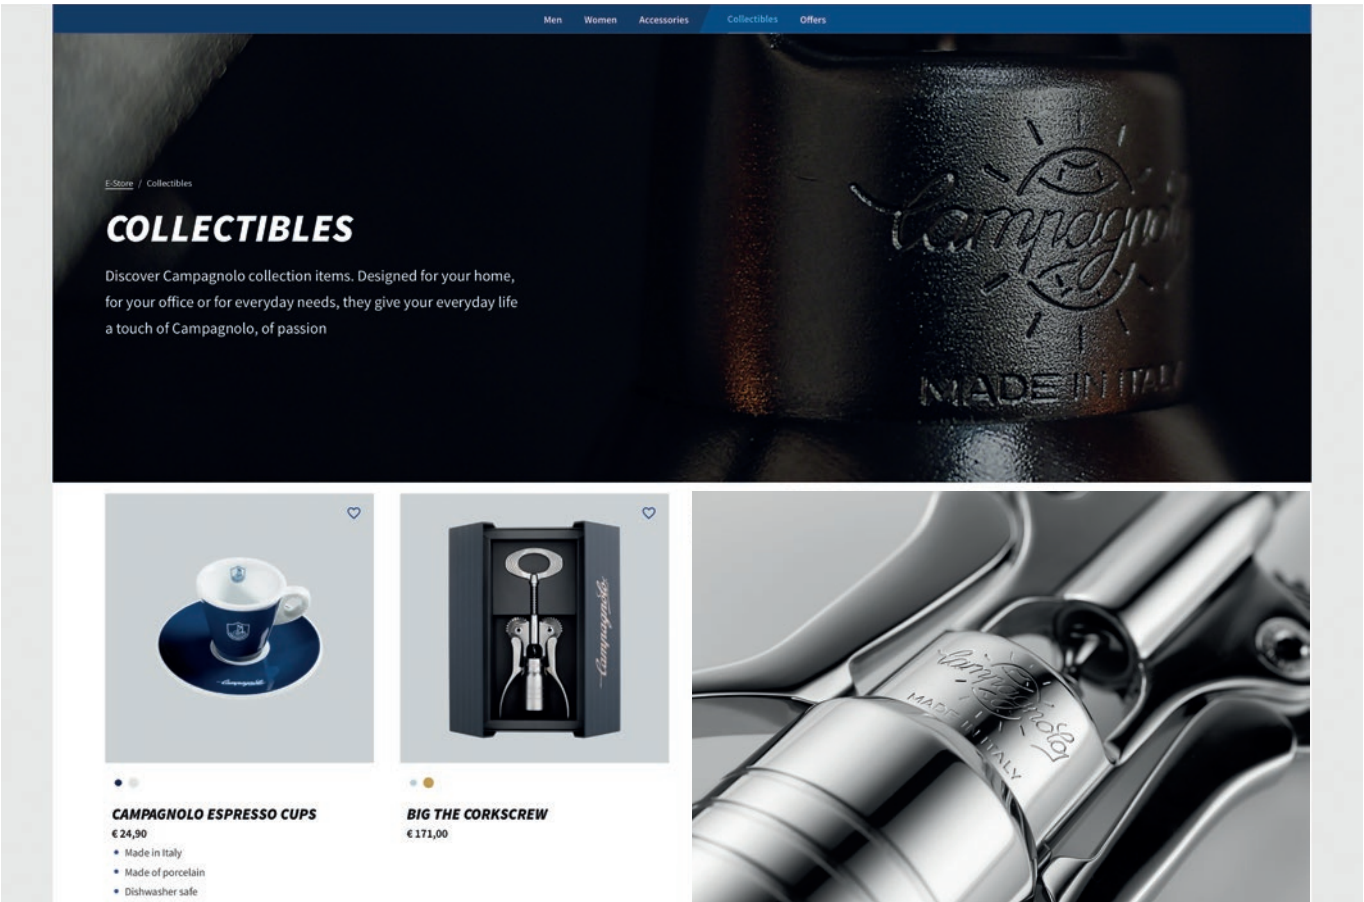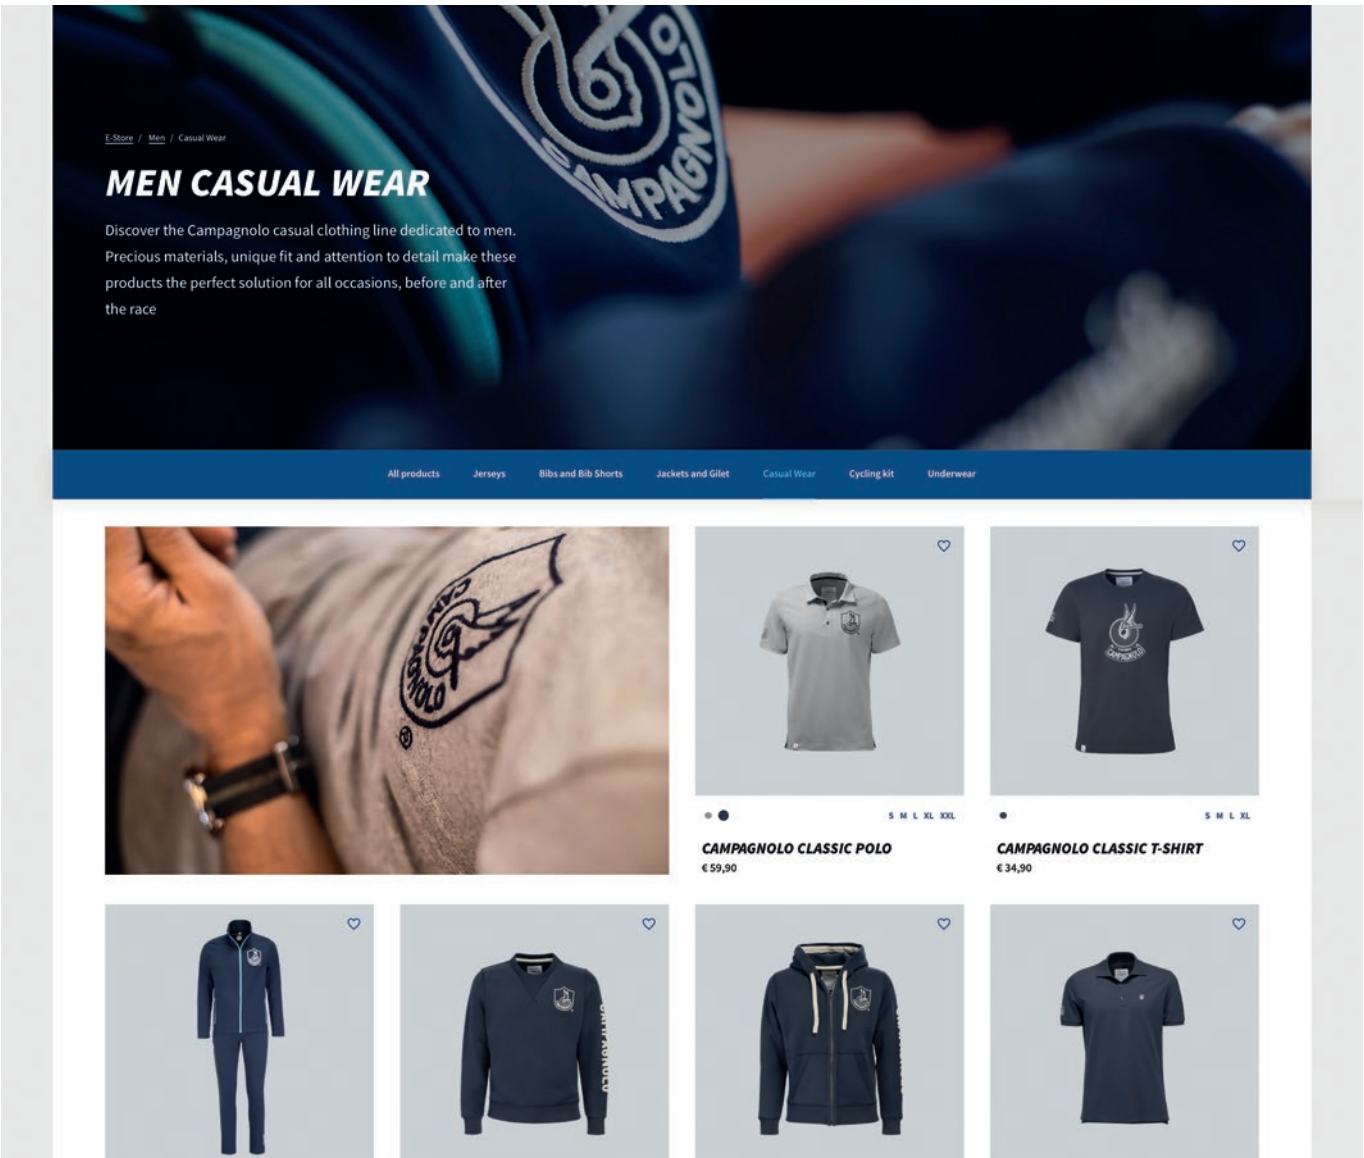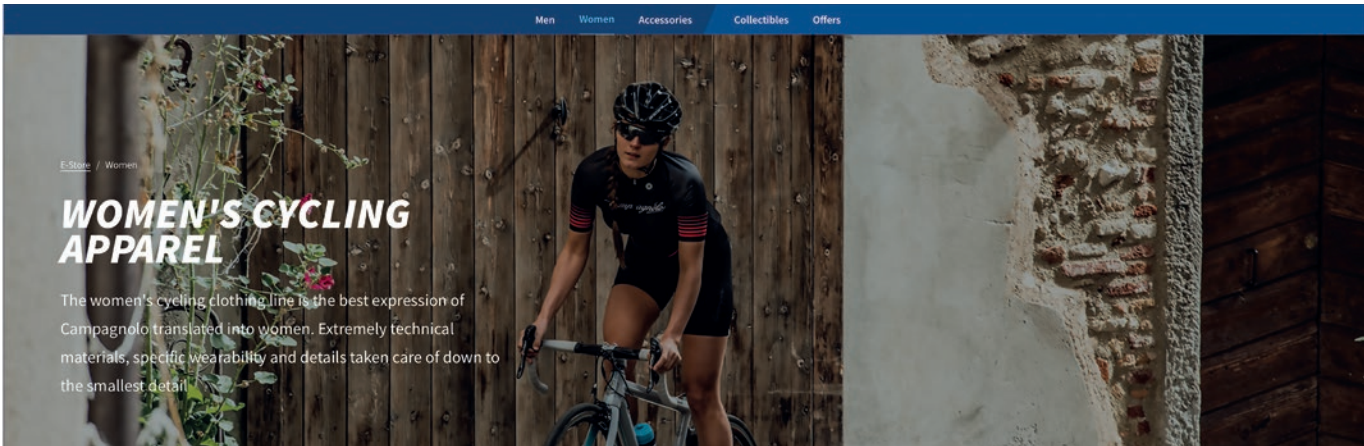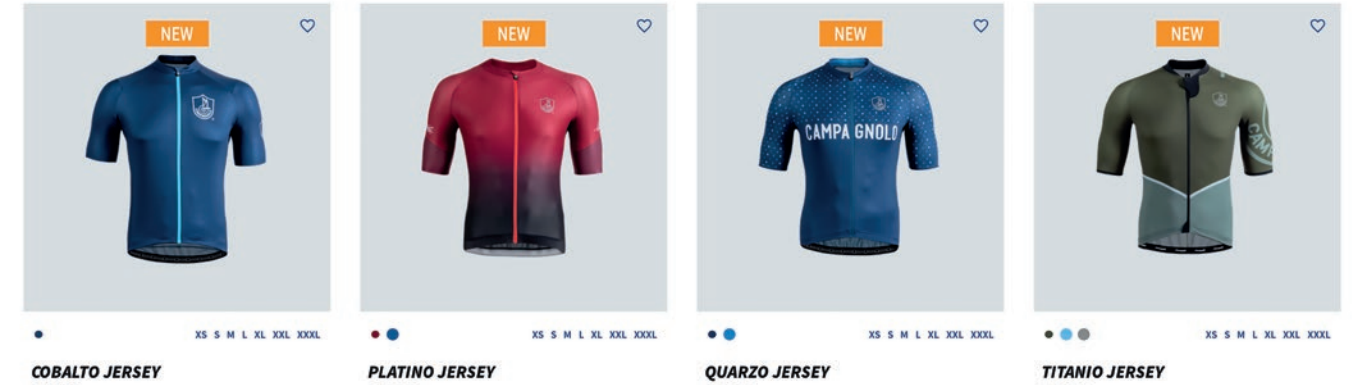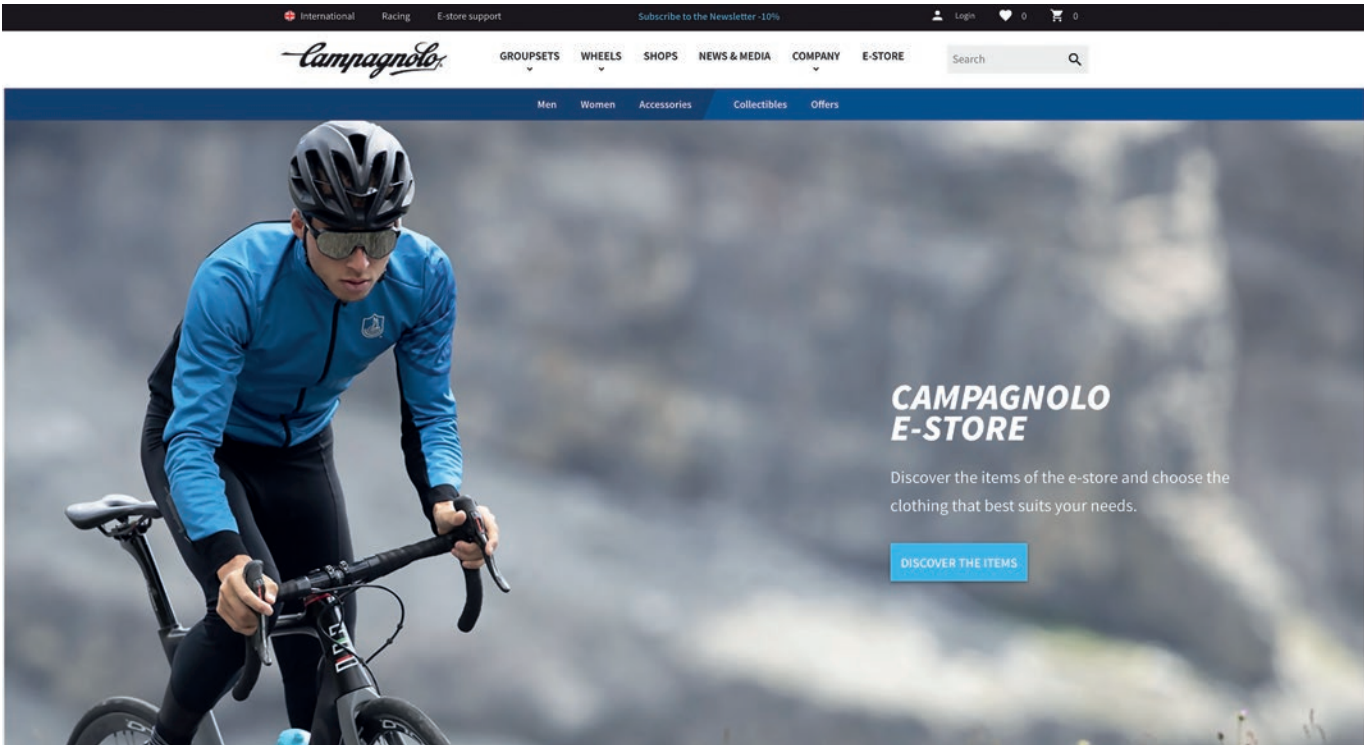

GROUPSETS



GROUPSET TECHNOLOGIES

6

SUPER RECORD™ EPS™	12x2 Speed	Disc Brake - Rim Brake	88 - 90
SUPER RECORD™	12x2 Speed	Disc Brake - Rim Brake	92 - 94
RECORD™	12x2 Speed	Disc Brake - Rim Brake	96 - 98
CHORUS™	12x2 Speed	Disc Brake - Rim Brake	100 - 102
POTENZA 11™	11x2 Speed	Disc Brake - Rim Brake	104 - 106
CENTAUR™	11x2 Speed	Rim Brake	108 - 110

12x2 SPEED

Campagnolo® presents the next step towards perfecting movement:
the new 12x2 Speed groupsets,
now available in electronic version.

A historic milestone indeed as Campagnolo proudly presents a
performance solution that improves upon every aspect of the groupset:
ergonomics, performance, precision, reliability and design.



WHAT IF THIS...

BECOMES THIS?

RAIN WON'T STOP YOU

EPS IS WATERPROOF



INTERFACE V4



New Interface V4 External version

Same aerodynamic design, new 12 speed specific intelligence

Command center

Transmission control but also BLE and ANT+ antennae for complete interaction with external devices



New V4 Interface Internal version:

Option 1 - BAR END



New V4 Interface Internal version:

Option 2: FRAME



POWER UNIT V4



New V4 Power Unit

New Design, New Possibilities



Longer and Longer Lasting:

10% longer battery life



Slim structure compatible with nearly all frames

Seat post adaptor allows for easy
internal mounting



ERGOPOWER

SUPER RECORD™ EPS™

12x2 SPEED™



Improved and customizable ergonomics



New hood design:


Vari Cushion Technology



Upgraded brake lever

Result of meticulous hand movement studies (double curve brake lever, new form outward curve).

Larger thumb shifting lever

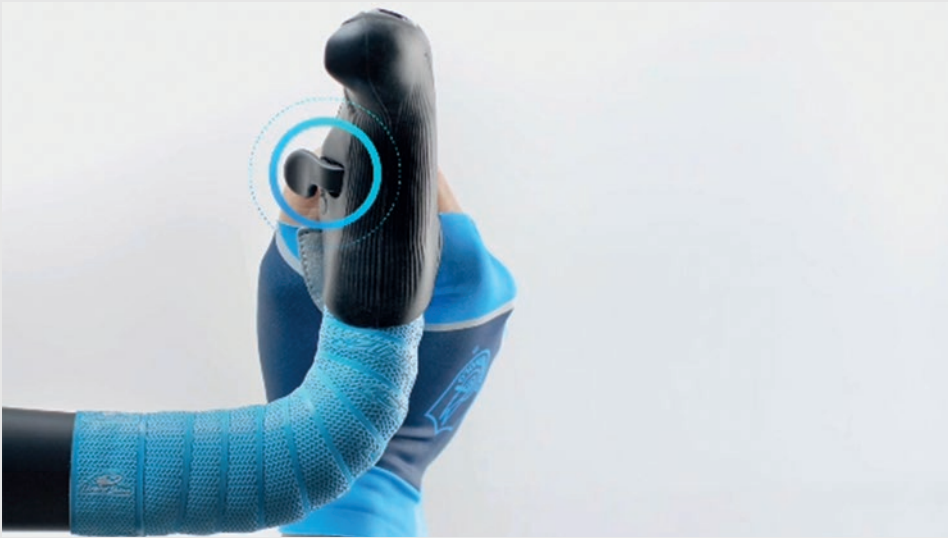

Braking lever pivot aligned with slant of Ergopower




Better, more efficient power transfer requiring less energy from riders hand

Upshifting lever enlarged



One lever
One action

Upshifting lever incorporated into brake lever

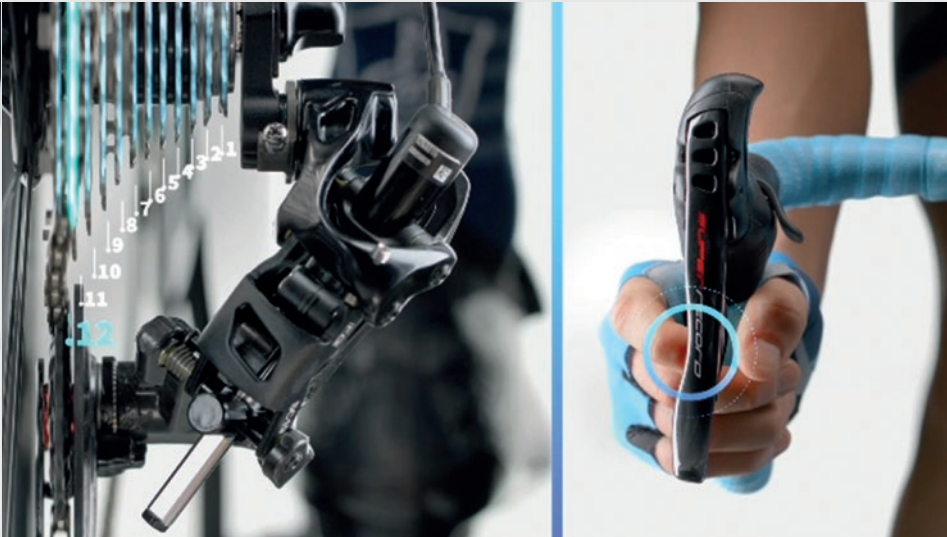



Multi-Shift mechanism maintained

Upshift up to 12 sprockets

Downshift up to 12 sprockets

Solid, robust and reliable
internal design

New 12 speed shifting, same
internals that have proven worthy
since EPS's launch

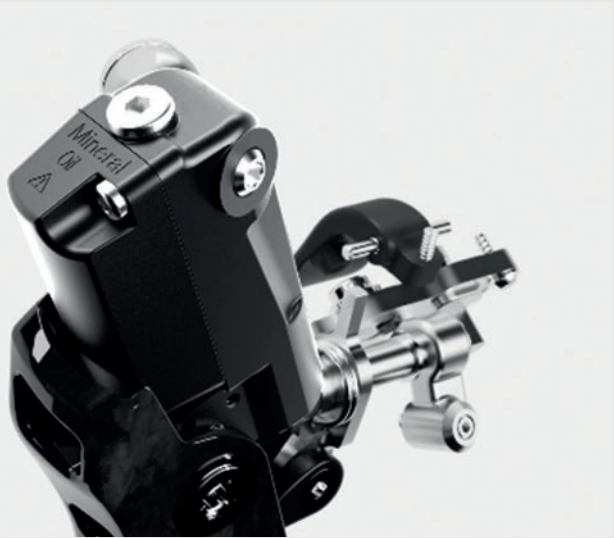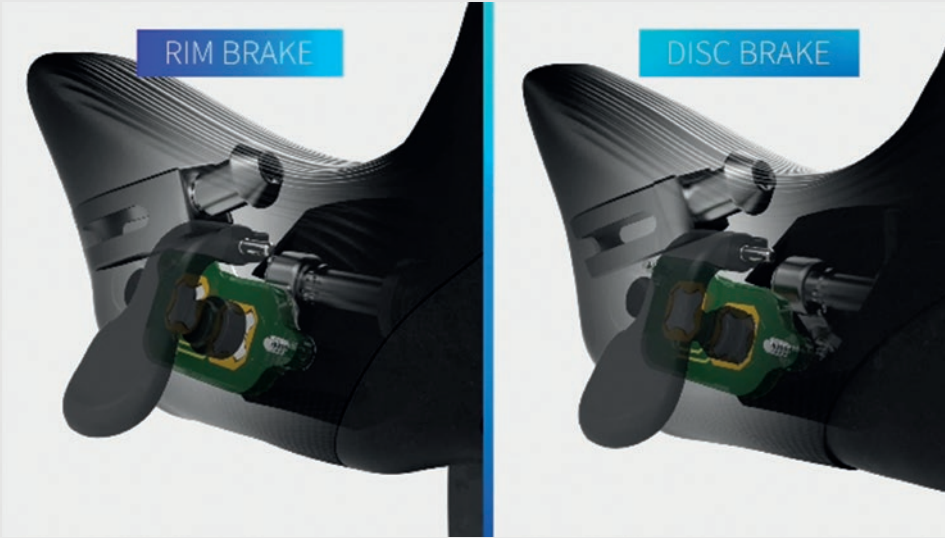

ERGOPOWER EPS DB

**Master cylinder: low
profile made possible via
fantastic design**

- Compact
- Vertical position for optimum
bleeding and functionality
- Bleeding port on top extremity
- Single cylinder design(same for
right and left)

Multi-dome Technology



ERGOPOWER EPS DB

Complete customization

Both brake and upshifting levers
are completely customizable to the
rider's needs and preferences
by using a simple allen key

Mode Button



ERGOPOWER EPS DB

AMS

Not only ergonomics but also
performance.
AMS setting allows for fine-tuning of
brake performance and free stroke
to meet each individual cyclists
personal preference

FRONT DERAILLEUR

SUPER RECORD™ **EPS**™

12x2 SPEED™



Thin cage and specific setting for crossings

A prompt reply of the front derailleur is guaranteed when shifting



Inner semi-cage design optimized for excellent chainring engagement

Maximum shifting fluidity thanks to the cage shape which helps the chain engage the chainring



Flawless, 12 speed specific, front shifting

Advanced and meticulously studied form and new intelligence from interface

Campagnolo motors

Extreme strength and precision



Extremely fluid front shifting even under heavy load



Automatic Chain Centering

Communication from rear derailleur allows front derailleur to adjust position



REAR DERAILLEUR

SUPER RECORD™ *EPS*™

12x2 SPEED™

**Trajectory curve optimized
for 11-29 and 11-32
cassettes**

Improved shifting performance
having the upper pulley always
working very close to each sprocket




Upper body in aluminum:

fantastic resistance to impact

**Thinner internal cage
width**

- Larger gap between rd cage and spokes in rotation
- More reliable design
- Increased safety of rider and product
- Easier adjustment of rear derailleur

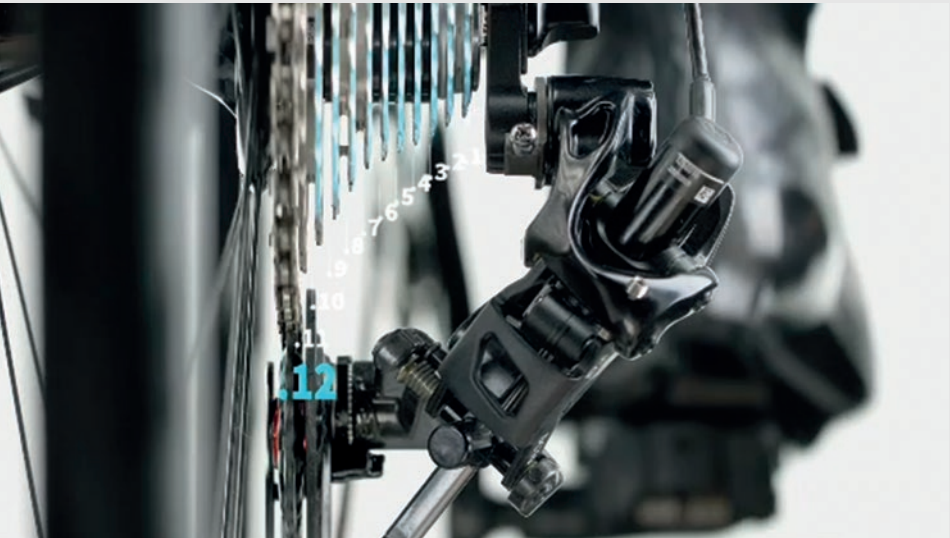

Multi-Shift Technology

Precise and lightning fast shifting
performance up to 11 sprockets at a
time

**Traditional mech hanger
specific rear derailleur
geometry**



**No compromise
construction**

Lightning fast
Extremely strong
Extremely resistant

ERGOPOWER™

SUPER RECORD™

RECORD™

CHORUS™

12x2 SPEED™



Improved ergonomics



Upgraded brake lever

result of meticulous hand movement studies (double curve brake lever, new form outward curve)

Customizeable ergonomics



Larger thumb shifting lever

New hood design
Vari Cushion technology



Upshifting lever enlarged

Upshifting lever
incorporated into
brake lever



Ultra Shift™ mechanism
maintained

up to 5 sprockets in downshifting -
Unique to Campagnolo
up to 3 gears in upshifting



Breaking lever pivot
aligned with slant of
Ergopower™

better, more efficient power transfer
requiring less energy from riders
hand



One lever One action



Completely redesigned
internals

perfect compatibility with completely
new rear derailleur



CABLES AND HOUSING



New transmission

offers some of the smoothest and most effortless shifting ever produced by Campagnolo



New cables and housing drastically reduce friction



Maintain exceptional smoothness far beyond those of the competition

THE MAXIMUM SMOOTHNESS

maximum performance longevity

FRONT DERAILLEUR

SUPER RECORD™

RECORD™

CHORUS™

12x2 SPEED™

SUPER RECORD



Completely new design builds upon successes of Rev11+



Thin cage and specific setting for crossings

A prompt reply of the front derailleur is guaranteed when shifting

Separation of semi-rod from external rod:

Eliminates free stroke
Quicker, more immediate, reactive
front upshifting

New Design and Trajectory Angle



Inner semi-cage design optimized for excellent chainring engagement

Maximum values of shifting fluidity
thanks to the cage which helps the
chain in engaging the chainring

Dual position of cable grip bolt

Allows for use of tires up to 32mm

Allows for cable position to be
adapted to specific needs:
customizeable for differing tire
sizes and frame designs



Dedicated positions for each chainring and each scenario for each chainring



REAR DERAILLEUR

SUPER RECORD™

RECORD™

CHORUS™

12x2 SPEED™

Upper body in ULTRA-LIGHT technopolymer reinforced with UD Carbon Fiber

Extremely low weight, with same
Campagnolo resistance and rigidity




One Rear Derailleur fits all

Unique medium size cage, 72,5mm

Trajectory curve optimized for 11-29, 11-32 and 11-34 cassettes

Improved shifting performance
having the upper pulley always
working very close to each sprocket

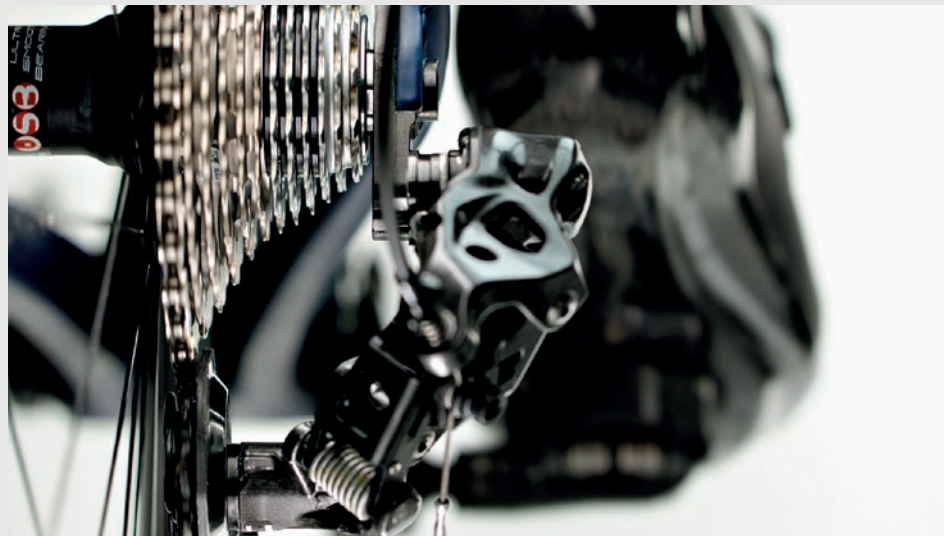



One Rear Derailleur fits all

Allows uniform performance
between 11-29, 11-32 and 11-34
cassette

3D-Embrace technology

Embrace evolved --> from 2D to 3D
The inner mechanism allows rear
derailleur to embrace more teeth per
sprockets thanks to the advanced position
of the upper pulley (2D). This allows
to have really high values of torque
resistance even on the 11 sprocket and
to have the same chain length even
changing cassette or chainrings

Unique position of the upper wheel pulley
The upper wheel moves to the same
position (compared to the sprocket)
independently from the chainring
engaged. This is obtained with a
gearwheel system which works better
that the competitor's spring system

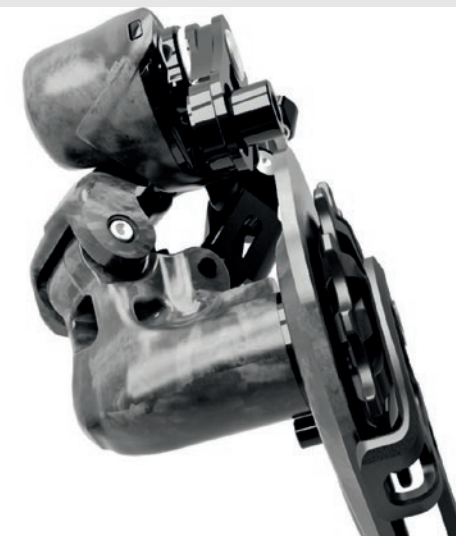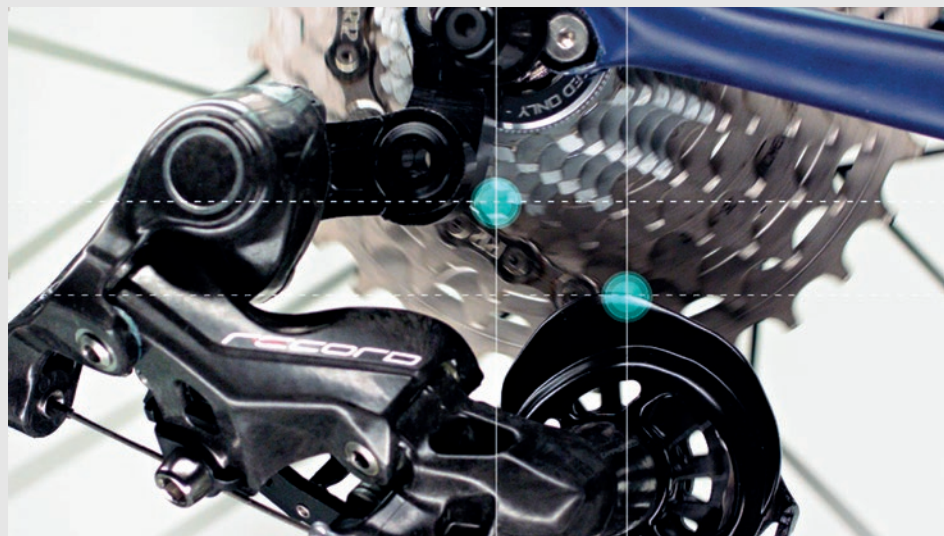

Larger Pulley Wheels

Larger, 12 tooth design

Longer, pronounced tooth design
upper wheel

Rounded lower profile tooth design
on lower wheel to improve fluidity in
chain crossing scenarios

Allows for greater versatility in
cassette compatibility and eliminates
need to alter chain length

Thinner internal cage width

Larger gap between rear derailleur cage and spokes in rotation

More reliable design

Increased safety of rider and product

Easier adjustment of rear derailleur



Travel limit screws on back of upper body

Upper body adjustment



Upper body return spring

Absorbs road vibration and protects integrity of rear derailleur

Versatile Hanger System

Standard or Direct hanger assembly allows perfect compatibility of rear derailleur with any frame: disc or rim, direct mount or classic hanger



It does all of that at only 3 g more than the previous version (Super Record). Technically an increase... if we were comparing to 11s...

Total weight 181 g

CASSETTES

SUPER RECORD™

CHORUS™

12x2 SPEED™





With 12 gears, the need for a wide range of cassettes is effectively eliminated as the extra gear allows for single tooth increments all the way to the 7th sprocket!

3 cassettes available:
11-29, 11-32 and 11-34:

11-12-13-14-15-16-17-19-21-23-26-29

11-12-13-14-15-16-17-19-22-25-28-32



11-12-13-14-15-16-17-19-22-25-29-34

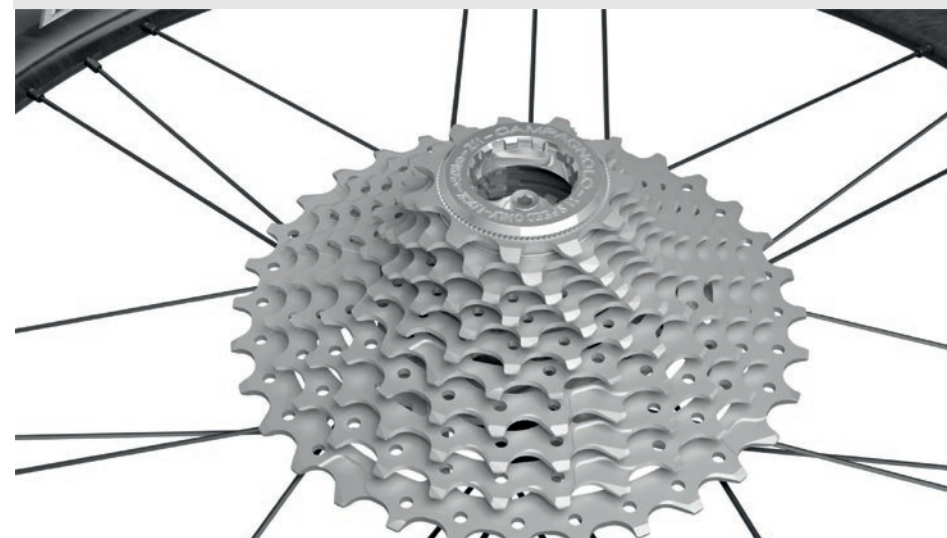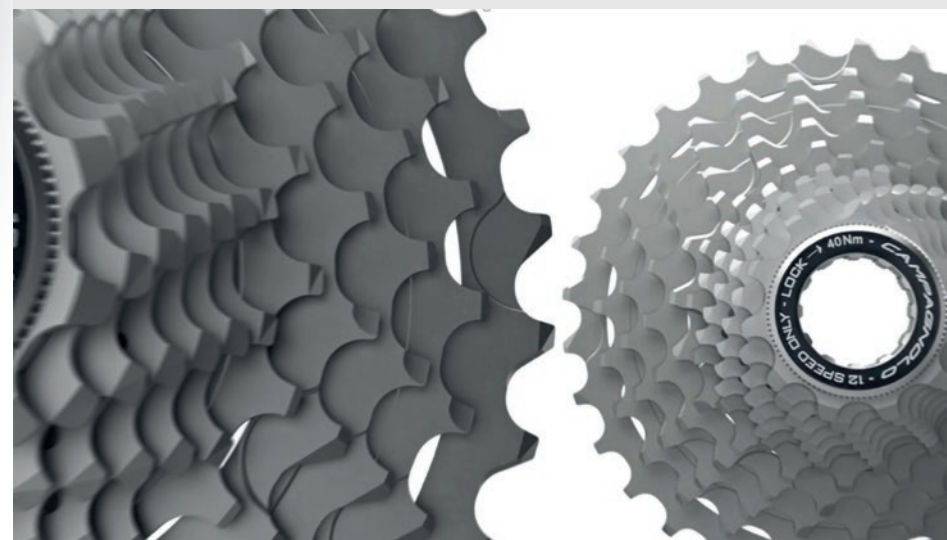

Same cassette width: total compatibility with the current free-hub bodies and the current frames rear chainstays width, obtained with thinner sprockets


The new cassettes are completely compatible with current freehub bodies and rear spacing remains unchanged, allowing the rider to continue with his or her same wheels and frame without a problem

Extra gear in cassette
without increasing width
= reducing space between
cogs as well as width of
individual cogs

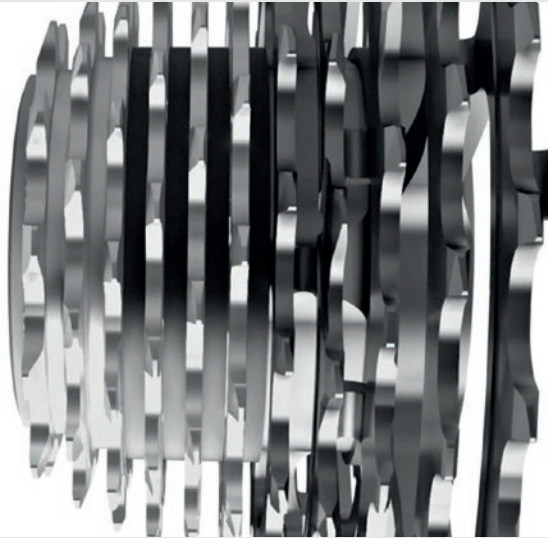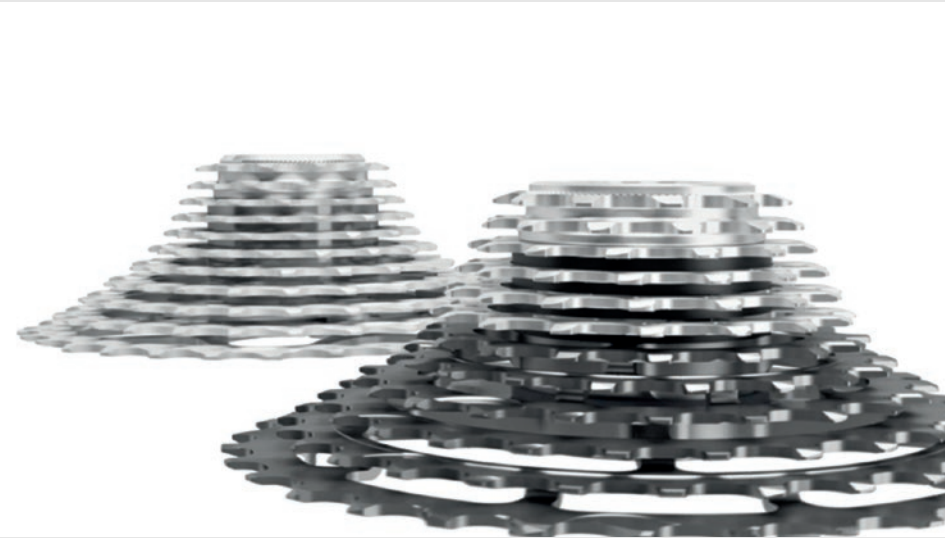



**Machined aluminum
spacers**
guaranteed optimum spacing to ensure
perfect alignment and shifting for the
life of the transmission

Lay-out with the last 2
triplets in monolithic steel
Maximum stiffness in the biggest
sprockets

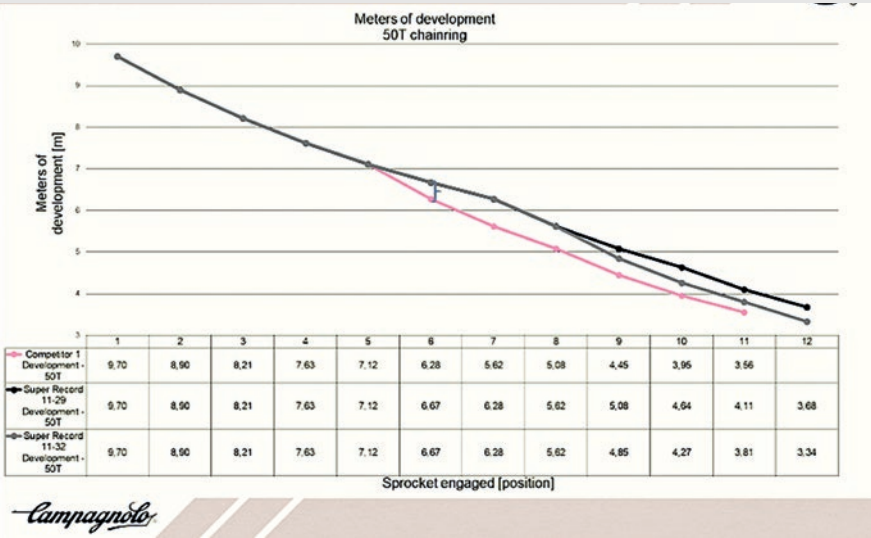

An extra gear makes for
more efficient gearing
with less gaps

Technical treatment on
the sprocket surface
Increasing the sprocket life via chemical
intervention

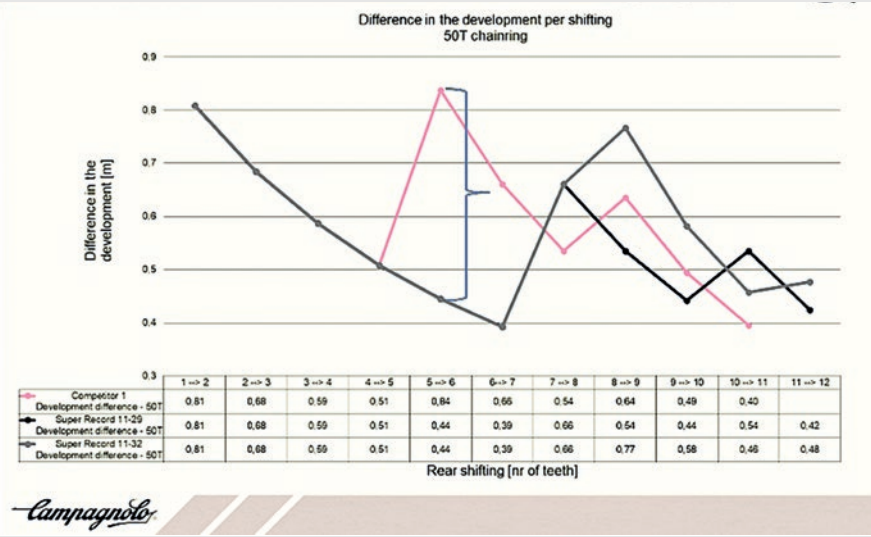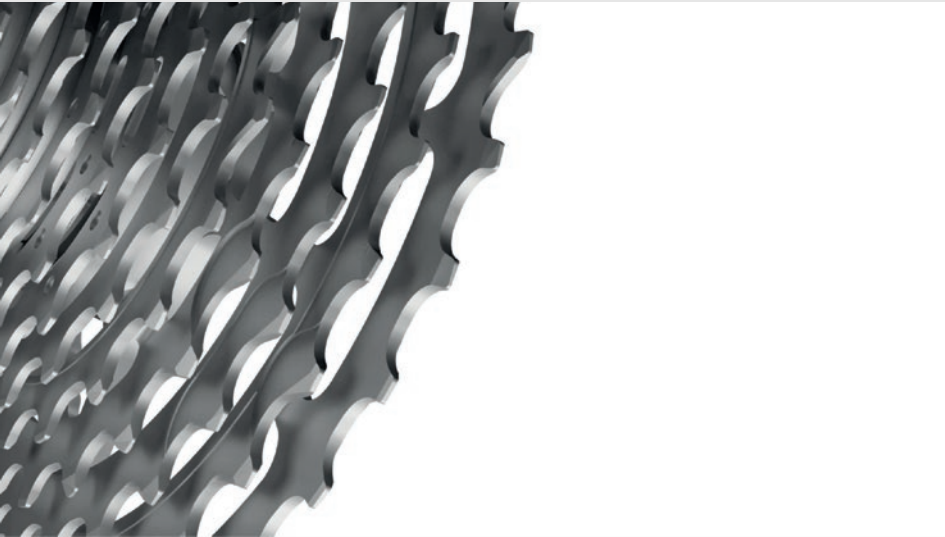


Metric development
remains linear

CRANKSETS

SUPER RECORD™



Smoother, more
aerodynamic design

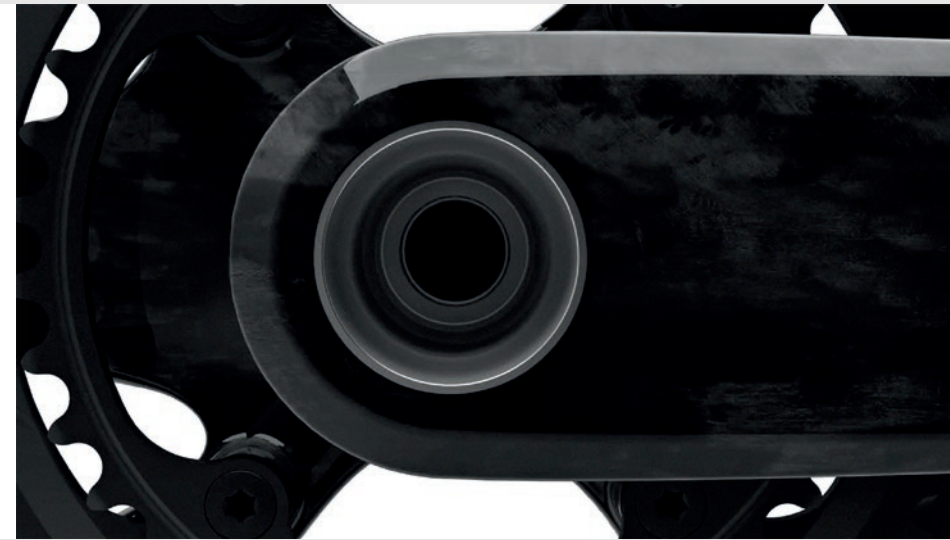

Ultra torque titanium axle

Closure on left crank

Advanced Campagnolo Carbon Technology

New and advanced carbon layup

Unidirectional carbon finish

Hollow carbon construction

Aggressive weight with no compromises
in terms of stiffness, reactivity or
reliability



CULT™ ceramic bearings

Q factor unvaried:
145.5 mm



Improved 4 arm spider
design:

Optimized bolt circle diameter:
8 bolt design locates bolts in perfect
position for each independent chainring

Increased stiffness, rigidity and as a
consequence reactivity

Optimized component integrity and
reliability

112 mm + 145 mm

Structural rigidity improved via added support material on larger chainring

Reinforced "brace" adds structural integrity to component where highest torque applied



Internally developed hard anodization process

Increases integrity and longevity of component



One crankset fits all:

50/34
52/36
53/39



Symmetrical turning on the inner chainring teeth

Increased versatility and lower friction in situations of extreme chain crossing

Available in 4 lengths: 165, 170, 172.5, 175



Chainring combination specific shifting designs

Differing number and location of pins and shifting zones according to chainring combination

Tooth design specific to chainring combination

Ensures optimum location of shift zones during pedal stroke

Considers differing diameter between standards




CHAIN

SUPER RECORD™

CHORUS™

12x2 SPEED™

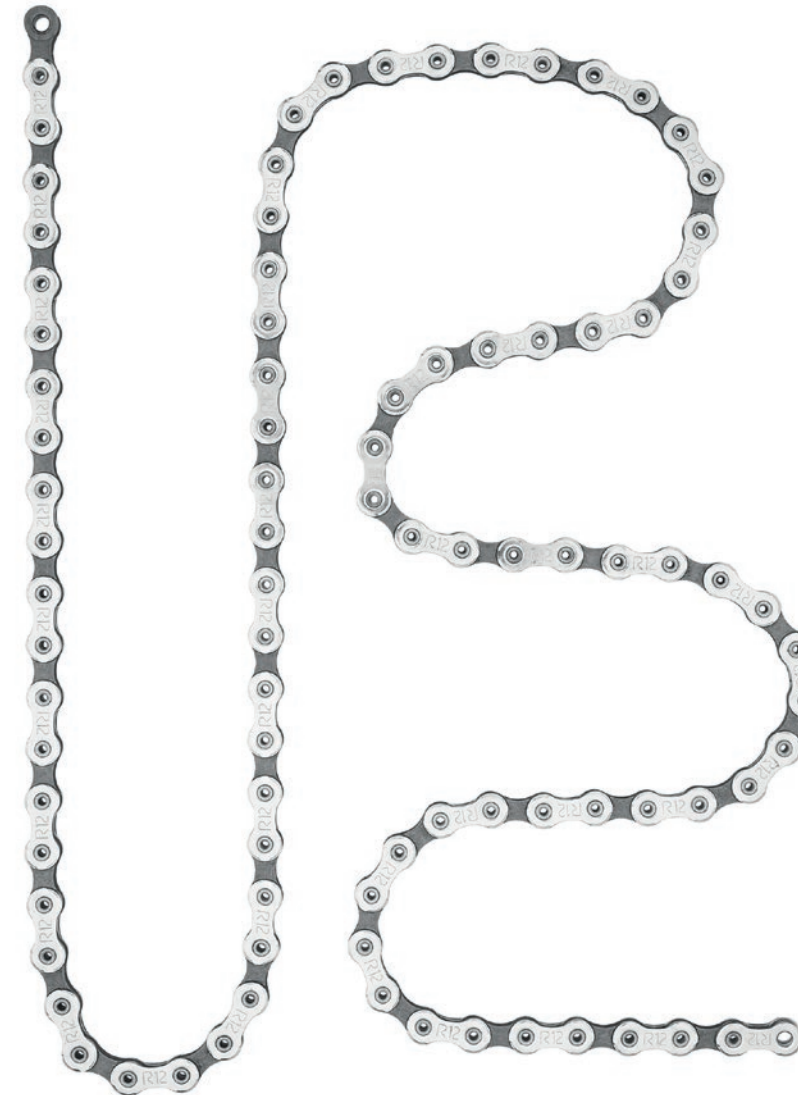

Incorporating an additional gear into the same space

presented the Campy Tech lab with a challenge as an additional gear added without widening rear spacing meant that both cogs and chain would need to be slimmer

particularly difficult challenge as durability, reliability and performance could not be altered, only improved.

The new 12-speed chain, while thinner and lighter, engages quicker and maintains the exact same durability of its 11-speed predecessor



BRAKES

SUPER RECORD™

RECORD™

Traditional rim New aerodynamic design

Smooth contours



New aerodynamic design

Overall form more coherent with aero frames



Compatibility with tires up to 28mm in width

Perfect for both C7 and C19 inner width rims



Lever Movement on bearings

Increased smoothness

Aids in modularity



Traditional rim Brake shoe with exclusive attach / release system for brake pads



Direct Mount

increased rigidity thanks to Campagnolo direct mount brace solution

ease of build thanks to same brace

integrity of both brake and frame maintained thanks to brace (alternative solutions push frames open)



ERGOPOWER™ DISC BRAKE

SUPER RECORD™

RECORD™

CHORUS™

12x2 SPEED™



Building on the backs of the fantastic H11 Ergopower commands,

which ushered in a new level of personalized ergonomics and control, the new Super Record and Record commands incorporate new advancements to ensure they earn their top-level standing.



Campagnolo, never being content on leaving good enough alone,

strives to make great better and in doing so has improved upon ergonomics even further by incorporating a new form to the brake lever. Internal studies showed that this new form optimized access to the brake lever for all hand forms and sizes from the drops and made for a safer hand position when engaging the lever.

As with H11 the new Ergopowers are only 8mm taller than their rim brake counterparts,

offering an additional hand position without altering ergonomics or ruining the finely crafted aesthetics of the component.



New forms for the upshifting levers

Larger and easier to find


Externally oriented for easy reach

Master cylinder: this low profile is made possible thanks to a fantastic design for the master cylinder

COMPACT
Vertical position for optimum bleeding and functionality

Bleeding port on top extremity

Single cylinder design (same for right and left)

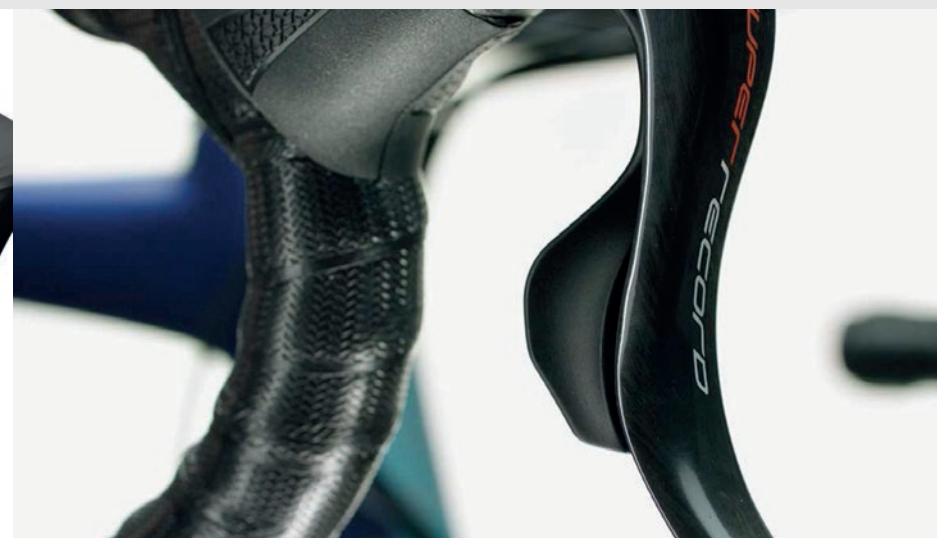

New forms for the upshifting levers

Profiled to match perfectly with the contours of the brake lever

New forms for the downshifting lever

Easier location of commands during even the most demanding and extreme efforts.



One lever action is maintained

AMS –Adjustable Modulation System (for Super Record and Record):

Complete customization
Just as with the H11 predecessor this customization applies not only to the ergonomics but also to the performance as the AMS setting allows for fine-tuning of the brakes performance and free stroke to meet each individual cyclists personal preference.



Brake lever adjustment dial allows for precise customization of lever's initial position



New internals:

Specifically designed for new componentry

Indexing and throw specific to 12 speed

Improved leverage and reduced force design

Ultra Shift™ optimized for 12 Speed:


with one single movement, multiple downshift of up to 5 sprockets at a time (unique to Campagnolo) and upshifts of up to three allow for immediate and decisive changes in gearing when the course or the situation demands.



CABLES

New, super-low-friction cables and housing, make for easier upshifting that requires not only less force

Freestroke elimination in upshifting

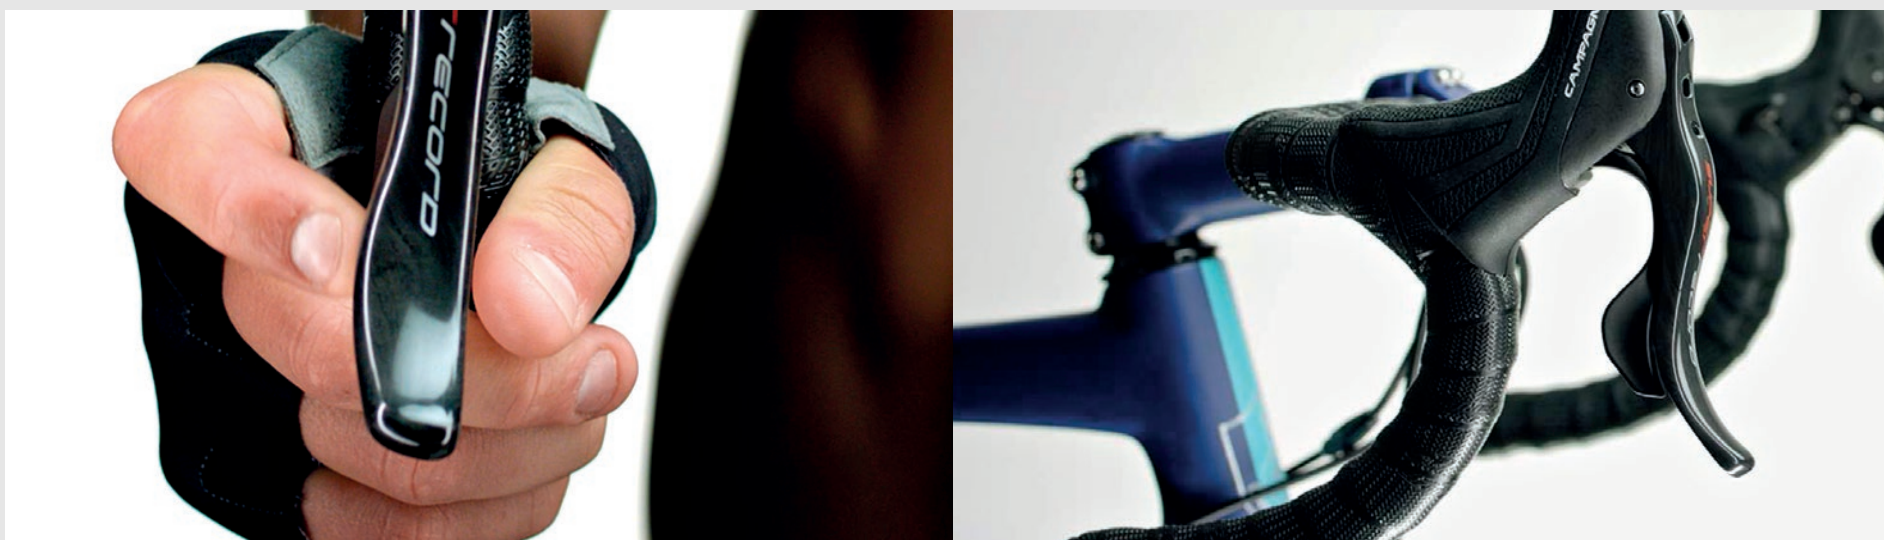

Combined with new Ergopower™ internals + new fd and rd, smoothest shifting with minimal hand movement required

The starting point of the upshift now begins more towards the outside and as such eliminates useless free-stroke, a characteristic unique to Campagnolo.



Not only extremely smooth but very durable performance

CALIPERS



Forged aluminum for optimum system integrity and rigidity



Two screw system:

eliminates additional componentry
-
fewer pieces = less weight

No need for adaptors

Front caliper for 160 mm disc

Rear caliper for 160 or 140 mm disc

perfectly compatible with all
flat mount frames



Two screw system:

simpler construction increases
integrity and performance
all bolts visible for inspection,
reducing risk and increasing safety

**Calipers mount by use of
only two screws**



**PISTONS:
LIGHTWEIGHT AND
POWERFUL 22 mm**

phenolic resin construction

material specifically chosen for
thermal insulation qualities

material specifically chosen for
thermal insulation qualities

provide great power transfer from
command to pad

Magnetic Spring:

guarantees uniform performance
over time

faster return

**Visible wear indicator:**

included in pad construction

Special shape:
serves to simplify wheel change
process by guiding disc into place

Brake Pads

Organic resin pad compound:
extremely resistant to heat

provides uniform and consistent
braking performance despite varied
temperature or climatic conditions


**Roll Back:**

ensures smooth and efficient
pedaling

Frame:

high performance pad requires
highly resistant frame

special steel structure ensures
system integrity under duress

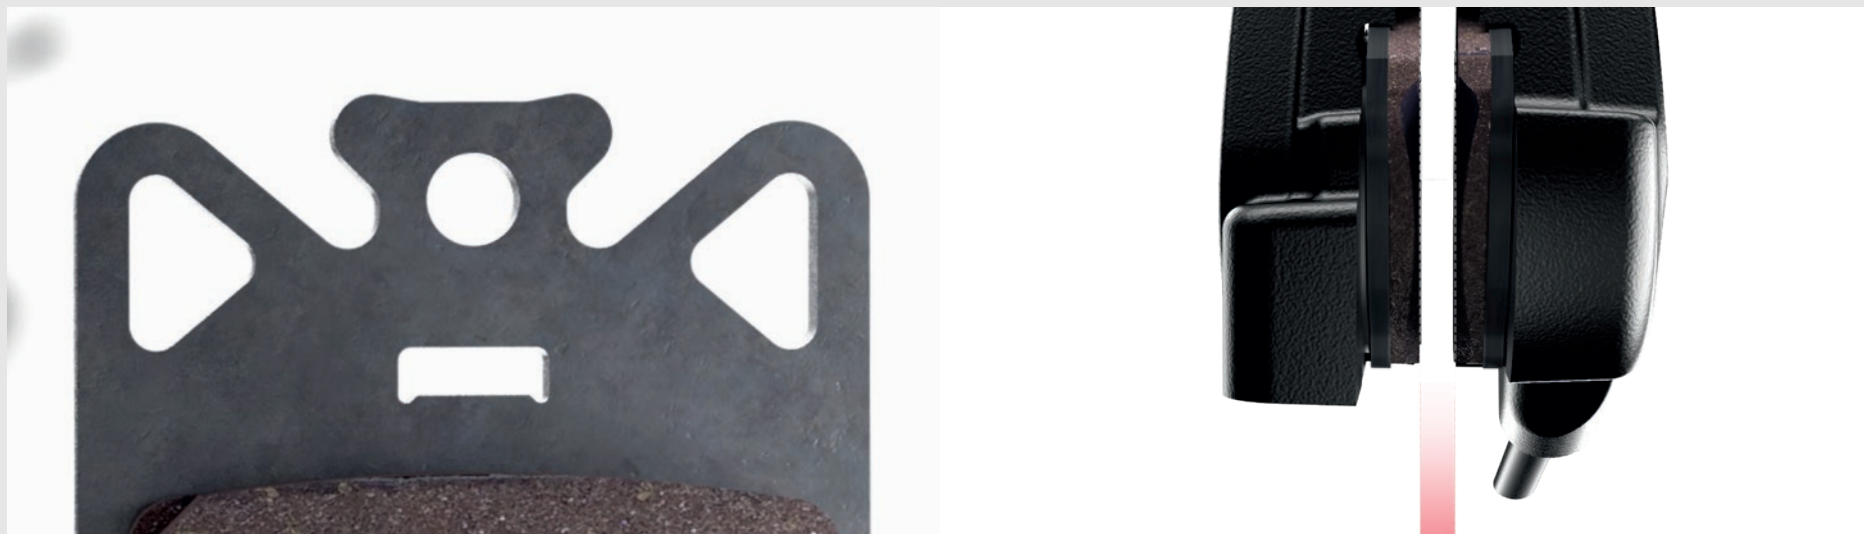


0,4mm distance
guaranteed by
Campagnolo is even with
industry leader

DISC



AFS Axial Fixing System

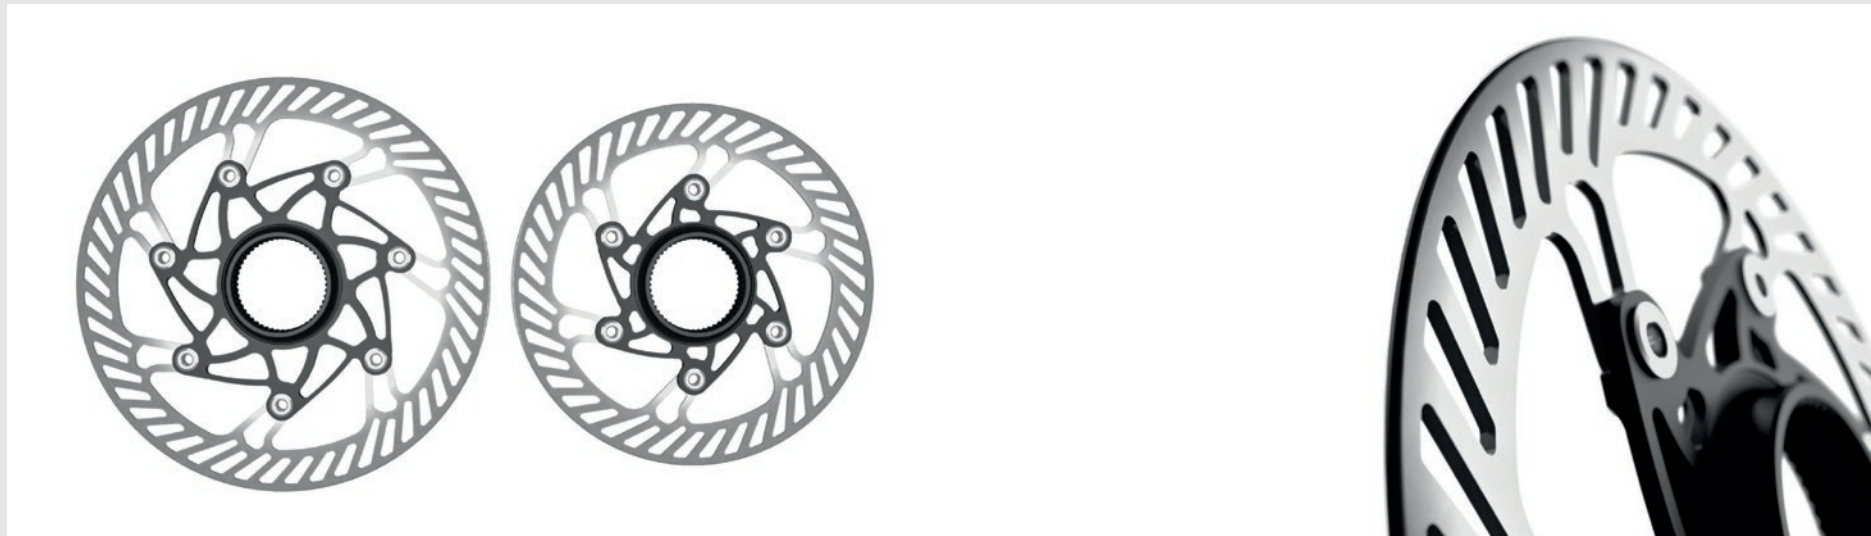

Campagnolo disc brake rotors:

dissipate heat in safe and uniform manner while guaranteeing performance in situations of heat that compromise the functionality and safety of competing products

Rounded edge to ensure maximum safety




Total Unit Extreme Heat Resistance:

performance and safety guaranteed

Fundamental key to extreme performance and safety

extreme resistance to heat

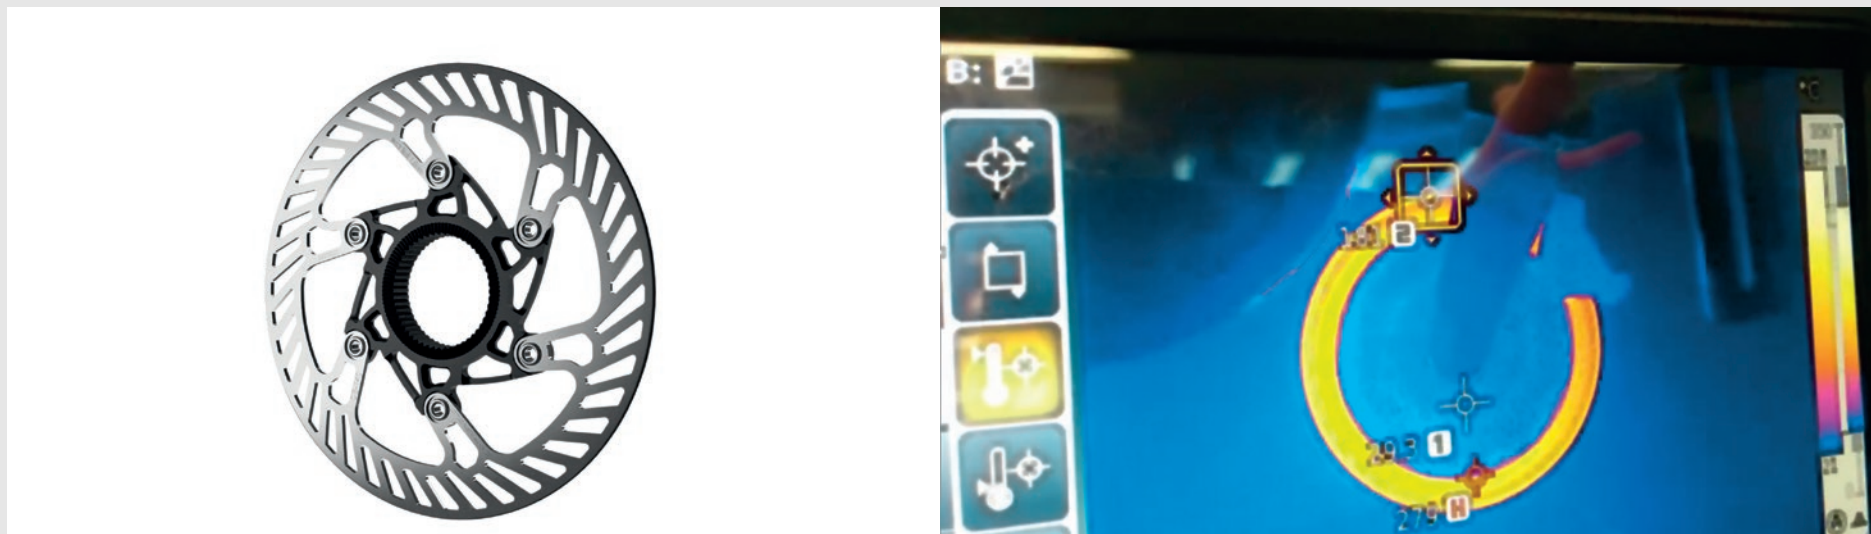

Resistance to heat Tests



MYCAMPY™ APP

MyCampy™ : your cycling world in the palm of your hand!

Campagnolo®, throughout its prestigious 80+ year history, has introduced numerous game changing technologies that have seen the greatest champions the world has known to victory. From the invention of the first quick release came the first 8, 9, 10, 11 and 12 speed transmissions, the first complete wheelset, the first tenso-structure wheel and a cornucopia of other products universally lauded for their quality and extreme performance characteristics. With so many fantastic products and unique performance solutions the one thing missing was not a physical component but rather a system that helps the cyclist manage his cycling componentry and certain aspects of his or her cycling in a complete and efficient manner. The new MyCampy™ App seeks to do just that ...and all in the palm of your hand...and all for free!

MyCampy™ App is your do-it-all companion that assists you in managing your cycling activity and cycling kit both in the saddle and off. From keeping track of your entire garage of bikes and the components built on each one to EPS™ performance analytics and complete customization of its performance, the new application is as much your own “neutral support” as well as your personal “Sporting Director” and much more. It allows you to interact in a 360° manner with your cycling “stable” and gain a more complete Campagnolo experience all from the comfort of your smartphone, pc or tablet.



Download MyCampy™ today and experience Campagnolo® like never before.

Some of its principal functions include:

MyGarage™:

keep a detailed look over all of your cycling equipment, know exactly how many kilometers each and every component, wheel, chain or cassette has done and when it might be time to perform general maintenance to keep things functioning like new.

MyEPS™:


offers the possibility of interacting in a 360° manner with your Campagnolo® electronic drivetrain by connecting wirelessly with your EPS™ groupset in order to: fully customize commands and system performance, instantly download and install new firmware, offer real-time diagnostics for each and every individual EPS™ component.

MySessions™:

a sophisticated analytical tool that offers a unique look into your performance in addition to how it is affected by your use of components. Track each and every shift, know exactly where when and how you were riding a specific segment in addition to getting tips and suggestions to improve your efficiency on the bike all in conjunction with the innovative wifi capabilities of the V3 EPS™ interface.

Campagnolo® World:

stay up to date with all of the latest happenings in the world of Campagnolo... race results, new product launches, events etc all in one app.

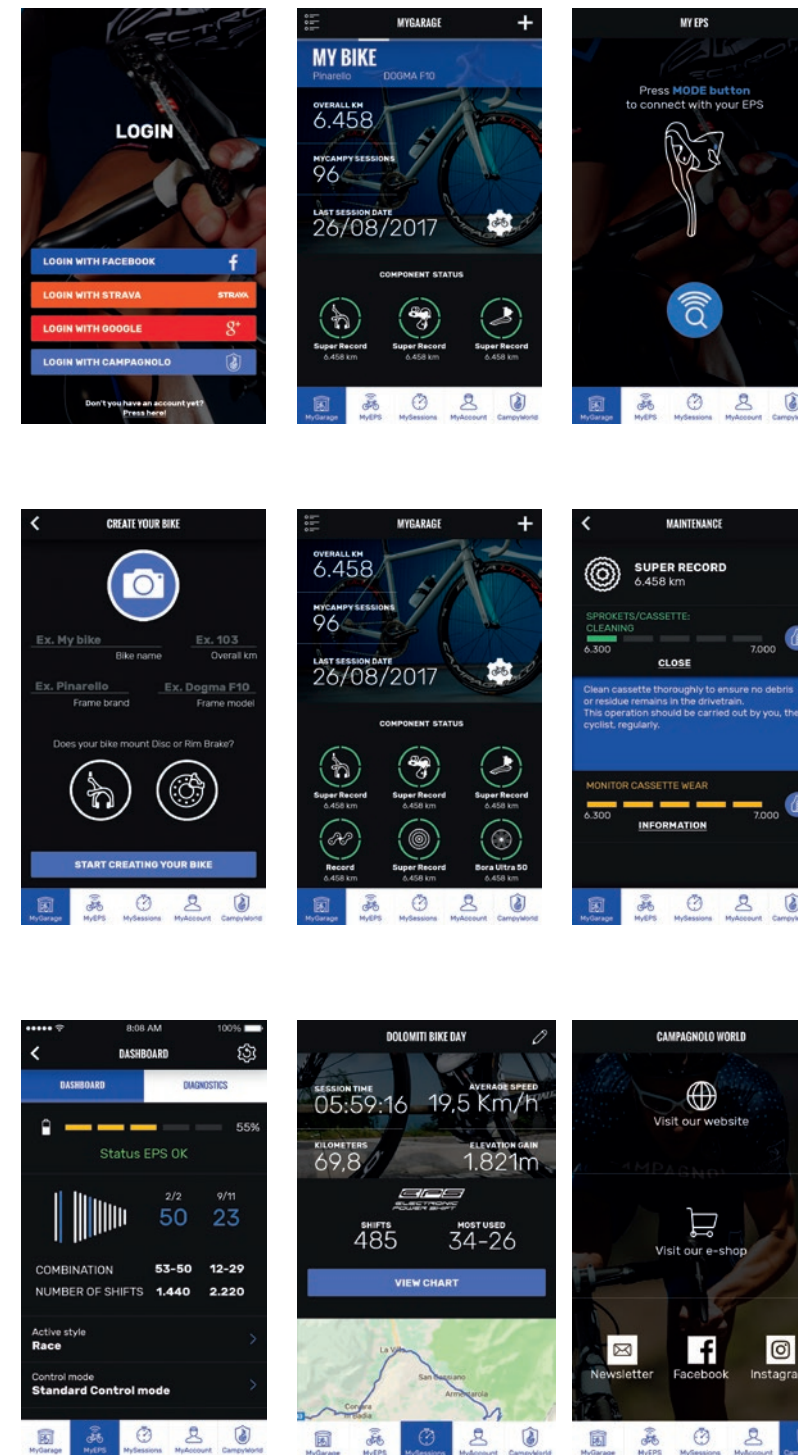



With the popular disc brake system and introduction of the 12-speed, Campagnolo **Super Record™ EPS™** now ticks all the boxes on the market for maintaining its historic role as a benchmark in terms of performance and quality for more demanding cyclists.

Fast shifting, always precise and effortless for the cyclist, and a very gradual gear ratio are just some of the extraordinary characteristics of the new EPS™ groupset, whose performance is ensured by the tried and tested Campagnolo disc brake system and the AMS and Reach adjustment management options.

12x2

SUPER RECORD™ EPS™ REAR DERAILLEUR 234 g

HIGH TORQUE, HIGH DRIVE RATIO MOTORS - SPECIAL T.I.N.™ TREATMENT - FRONT PLATE AND CAGE IN CARBON FIBRE - MULTI-SHIFTING™ TECHNOLOGY - POSITION SENSOR - LOWER BODY IN MONOLITHIC CARBON POWDER TECHNOLYMER - UPPER BODY IN ALUMINIUM - EXCLUSIVE "UNLOCK SYSTEM™" - 100% WATERPROOF

12x2

DTI™ EPS™ V4 INTERFACE 11 g

DIALOGUE WITH "MYCAMPY" APP: wireless system to communicate with "MyCampy" App by PC / Notebook / Tablet / Smartphone (BTLE), which allows the EPS groupset holder to personalize its own settings - EASY ACCESS TO THE CHARGING PORT - "ZERO SETTING" AND "RIDE SETTING" - LED RGB - TWO VERSIONS AVAILABLE: EXTERNAL (33 g) INTERNAL (on handlebar or frame)

12x2

SUPER RECORD™ CRANKSET 618 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - NEW CHAINRINGS - ULTRA-TORQUE™ AXLE - TITANIUM AXLE AND REVERSE THREAD TITANIUM FIXING BOLT - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - HOLLOW CRANKS AND SPIDER ARMS WITH ULTRA-HOLLOW™ TECHNOLOGY - CULT™ TECHNOLOGY - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED - REINFORCEMENT BRACE FOR INCREASED STIFFNESS IN AREAS OF HIGHEST TORQUE APPLICATION

CAMPAGNOLO® CALIPER 118 g

FLAT MOUNT STANDARD - AVAILABLE CALIPERS: 160 mm FRONT (123 g PADS INCLUDED), 140 mm AND 160 mm (115 g / 119 g PADS INCLUDED) - ADAPTER FOR USE ON 140 mm FRONT - 22mm PISTON WIDTH IN EVERY CALIPER - INTEGRATED MAGNETIC SPRING ON PISTON - 0,4 - 0,6 mm ROLL-BACK (RETURN) - PADS WITH WEAR LIMIT INDICATOR - ROUNDED EDGES ON THE PAD - ANTI VIBRATION METAL SHEET - CLEANER BIKE DESIGN - FAST AND SAFE ASSEMBLY - RETURN SPRING BETWEEN THE PADS - UNIQUE BLEND WITH ORGANIC DRY/WET RESIN

12x2

SUPER RECORD™ EPS™ FRONT DERAILLEUR 132 g

SPECIAL CAGE DESIGN - FRONT DERAILLEUR BODY IN MONOLITHIC CARBON TECHNOLYMER - POSITION SENSOR - HIGH TORQUE, HIGH DRIVE RATIO MOTORS - 100% WATERPROOF - CSD™ (CHAIN SECURITY DEVICE)

12x2

SUPER RECORD™ CHAIN 220 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

SUPER RECORD™ EPS™ DB ERGOPOWER™ 381 g

CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH - NEW ERGONOMICS OF THE ERGOPOWER™ BODY - NEW BRAKE LEVER ERGONOMICS - BRAKE LEVER WITH DOUBLE CURVE - AMS™ ADJUSTMENT (ADJUSTABLE MODULATION SYSTEM) - REACH ADJUSTMENT - HYDRAULIC MASTER CYLINDER - BLEEDING PORT ON THE TOP OF THE ERGOPOWER™ - VARI CUSHION™ HOOD - VERY LOW RESISTANCE OF UPSHIFTING AND DOWNSHIFTING LEVERS - MULTI-DOME TECH ON THE DOWNSHIFTING LEVER

CAMPAGNOLO® 03 ROTOR 99 g

COMPATIBLE WITH CL / AFS HUBS - ROUNDED EXTERNAL EDGE - TWO DIMENSIONS AVAILABLE: 140 mm (99 g) AND 160 mm (120 g) - HIGH HEAT RESISTANCE - DIFFERENT QUANTITY OF SPOKES PER EACH DIMENSION - RIVET CONNECTION ENGINEERED TO ATTAIN SAFE DISTANCE BETWEEN ROTOR AND CALIPER, PROMOTING EFFICIENT COOLING UNDER STRESS - SEMI-FLOATING TECHNOLOGY

12x2

DTI™ EPS™ V4 POWER UNIT 135 g

SEATPOST MOUNT COMPATIBLE - SPECIALLY DEVELOPED INTERNAL CASING DESIGNED TO MAKE SYSTEM 100% WATERPROOF - DTI™ DIGITAL TECH INTELLIGENCE - SEAT TUBE/ DOWN TUBE ADAPTOR MOUNT - +10% AUTONOMY COMPARED TO THE V3

12x2

SUPER RECORD™ SPROCKETS 266 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET



Super Record™ EPS™ Rim Brake, the feather in the cap of Campagnolo® innovation thanks to the technologies, materials and expertise behind the design of this groupset, consolidates its benchmark role by moving up to a 12-speed. This very popular groupset, winner of the Giro d'Italia, the Vuelta, the World Championships and many

other races on the World Tour circuit, is now available in a 12-speed option with its V4 version in Power Unit electronic components and interface. The groupset has been redesigned to adapt perfectly to the new 12-speed technological frontier and to the 11-29 and 11-32 cassette combinations introduced in the mechanical version.

SUPER RECORD™ EPS™ REAR DERAILLEUR	234 g	DTI™ EPS™ V4 INTERFACE	11 g
HIGH TORQUE, HIGH DRIVE RATIO MOTORS - SPECIAL T.I.N.™ TREATMENT - FRONT PLATE AND CAGE IN CARBON FIBRE - MULTI-SHIFTING™ TECHNOLOGY - POSITION SENSOR - LOWER BODY IN MONOLITHIC CARBON POWDER TECHNOLYMER - UPPER BODY IN ALUMINIUM - EXCLUSIVE "UNLOCK SYSTEM™" - 100% WATERPROOF		DIALOGUE WITH "MYCAMPY" APP: wireless system to communicate with "MyCampy" App by PC / Notebook / Tablet / Smartphone (BTLE), which allows the EPS groupset holder to personalize its own settings - EASY ACCESS TO THE CHARGING PORT - "ZERO SETTING" AND "RIDE SETTING" - LED RGB - TWO VERSIONS AVAILABLE: EXTERNAL (33 g) INTERNAL (on handlebar or frame)	
SUPER RECORD™ EPS™ FRONT DERAILLEUR	132 g	SUPER RECORD™ CHAIN	220 g
SPECIAL CAGE DESIGN - FRONT DERAILLEUR BODY IN MONOLITHIC CARBON TECHNOLYMER - POSITION SENSOR - HIGH TORQUE, HIGH DRIVE RATIO MOTORS - 100% WATERPROOF - CSD™ (CHAIN SECURITY DEVICE)		ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.	
DTI™ EPS™ V4 POWER UNIT	135 g	SUPER RECORD™ SPROCKETS	266 g
SEATPOST MOUNT COMPATIBLE - SPECIALLY DEVELOPED INTERNAL CASING DESIGNED TO MAKE SYSTEM 100% WATERPROOF - DTI™ DIGITAL TECH INTELLIGENCE - SEAT TUBE/ DOWN TUBE ADAPTOR MOUNT - +10% AUTONOMY COMPARED TO THE V3		ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET	

SUPER RECORD™ CRANKSET	618 g	SUPER RECORD™ EPS™ ERGOPOWER™ CONTROLS	280 g
FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - NEW CHAINRINGS - ULTRA-TORQUE™ AXLE - TITANIUM AXLE AND REVERSE THREAD TITANIUM FIXING BOLT - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - HOLLOW CRANKS AND SPIDER ARMS WITH ULTRA-HOLLOW™ TECHNOLOGY - CULT™ TECHNOLOGY - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED - REINFORCEMENT BRACE FOR INCREASED STIFFNESS IN AREAS OF HIGHEST TORQUE APPLICATION		CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH ONE LEVER-ONE ACTION: each lever of the command set has its own distinct function. This means absolute certainty of using the right control in all conditions (winter temperatures and gloves, poor road conditions etc.), eliminating the risk of error. 100% WATER-PROOF: all control components are built to operate in any weather conditions in compliance with the IP67 standard. MODE BUTTON: the "Mode" buttons allow the user to check battery charge, make fine adjustments to the rear or front derailleur - even in the middle of a race (with the "ride setting" procedure), and set the zero position of the rear and front derailleur ("zero setting" procedure). E-ERGONOMY™: the new lower position of the lever 3 ensures easier access from all riding positions allowing the athlete to shift easily from the hoods or the drops. MULTI-DOME TECH™: the 5-dome technology perfected by Campy Tech Lab™ together with Campagnolo® athletes has made it possible to strike the perfect balance between operating force and tactile shift feedback. It also eliminates the possibility of unintentionally shifting the rear or front derailleur.	
SUPER RECORD™ BRAKES	311 g		
MOVEMENT OF LEVERS ON BEARING - SPECIAL COMPOUND - EXCLUSIVE BRAKE PAD COUPLING/UNCOUPLING SYSTEM - DUAL PIVOT BRAKES - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION			
CAMPAGNOLO® DIRECT MOUNT BRAKE	168 g*		
CAMPAGNOLO® BRAKE SHOE STANDARD - FAST ASSEMBLY - FAST ADJUSTMENTS - MAXIMUM COMPATIBILITY - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION - RIGID REAR STRUCTURAL BRACE FOR POWERFUL, SAFE BRAKING - * Weight of one brake			



reddot award 2019
winner



The new **Super Record™ 12x2 Speed Disc Brake** groupset is Campagnolo's highest expression of technology and evolution. It is geared towards riders who want to equip their bicycle with the best the market offers in terms of performance and distinctiveness. The new groupset is presented on the market with an innovative rear derailleur

designed with 3D Embrace technology that enables the chain to maintain the highest level of traction, even on the smallest sprockets. The Disc Brake technology developed by Campagnolo ensures that the Super Record groupset has the greatest braking force and modularity possible.

12x2

SUPER RECORD™ FRONT DERAILLEUR

79 g

SPECIAL INNER CAGE DESIGN - OUTER SEMI-CAGE IN MONOCOQUE CARBON - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE- SPLIT CONNECTING ROD FOR SMOOTH DERAILING

12x2

SUPER RECORD™ CRANKSET

618 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - NEW CHAINRINGS - ULTRA-TORQUE™ AXLE - TITANIUM AXLE AND REVERSE THREAD TITANIUM FIXING BOLT - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - HOLLOW CRANKS AND SPIDER ARMS WITH ULTRA-HOLLOW™ TECHNOLOGY - CULT™ TECHNOLOGY - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED - REINFORCEMENT BRACE FOR INCREASED STIFFNESS IN AREAS OF HIGHEST TORQUE APPLICATION

CAMPAGNOLO® CALIPER

118 g

FLAT MOUNT STANDARD - AVAILABLE CALIPERS: 160 mm FRONT (123 g PADS INCLUDED), 140 mm AND 160 mm (115 g / 119 g PADS INCLUDED) - ADAPTER FOR USE ON 140 mm FRONT - 22mm PISTON WIDTH IN EVERY CALIPER - INTEGRATED MAGNETIC SPRING ON PISTON - 0,4 - 0,6 mm ROLL-BACK (RETURN) - PADS WITH WEAR LIMIT INDICATOR - ROUNDED EDGES ON THE PAD - ANTI VIBRATION METAL SHEET - CLEANER BIKE DESIGN - FAST AND SAFE ASSEMBLY - RETURN SPRING BETWEEN THE PADS - UNIQUE BLEND WITH ORGANIC DRY/WET RESIN

CAMPAGNOLO® ROTOR 03

99 g

COMPATIBLE WITH CL / AFS HUBS - ROUNDED EXTERNAL EDGE - TWO DIMENSIONS AVAILABLE: 140 mm (99 g) AND 160 mm (120 g) - HIGH HEAT RESISTANCE - DIFFERENT QUANTITY OF SPOKES PER EACH DIMENSION - RIVET CONNECTION ENGINEERED TO ATTAIN SAFE DISTANCE BETWEEN ROTOR AND CALIPER, PROMOTING EFFICIENT COOLING UNDER STRESS - SEMI-FLOATING TECHNOLOGY

NEW 12x2

SUPER RECORD™ REAR DERAILLEUR

181 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - CARBON FIBRE CAGE CONSTRUCTION - PARALLELOGRAM WITH TECHNOLOGY™ EXTERNAL CONNECTING ROD WITH UD FINISH (UNIDIRECTIONAL) - TITANIUM REAR DERAILLEUR FIXING SCREW - 12-TOOTH PULLEY WHEELS - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS - COMPATIBLE WITH SPROCKET SETS 11-29, 11-32, 11-34

12x2

SUPER RECORD™ CHAIN

220 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

SUPER RECORD™ DB ERGOPOWER™ CONTROLS

462 g

CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH - NEW ERGONOMICS OF THE ERGOPOWER™ BODY - NEW BRAKE LEVER ERGONOMICS - BRAKE LEVER WITH DOUBLE CURVE - AMS™ ADJUSTMENT (ADJUSTABLE MODULATION SYSTEM) - REACH ADJUSTMENT - HYDRAULIC MASTER CYLINDER - BLEEDING PORT ON THE TOP OF THE ERGOPOWER™ - ONE LEVER ONE ACTION - VARI-CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES - ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING - DERAILLEUR CABLE ADJUSTING BARREL

12x2

SUPER RECORD™ SPROCKETS

266 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET - SPROCKET SETS AVAILABLE: 11-29, 11-32, 11-34 (NEW)



The **Super Record™ 12x2 Speed Rim Brake** groupset is the highest expression of the prestigious Italian brand's technology and evolution. It is meant for those who want to fit their bicycle with the best the market has in terms of performance and distinction. The drive to improve what is already considered a reference point results in every

single detail being tended to, including the most minute. The Super Record groupset is both extremely lightweight and very sturdy. This groupset is the crowned jewel of Campagnolo® innovation and the technologies, material and expertise that the groupset is made with place it in a category apart.

12x2

SUPER RECORD™ FRONT DERAILLEUR

79 g

SPECIAL INNER CAGE DESIGN - OUTER SEMI-CAGE IN MONOCOQUE CARBON - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE- SPLIT CONNECTING ROD FOR SMOOTH DERAILING

12x2

SUPER RECORD™ CRANKSET

618 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - NEW CHAINRINGS - ULTRA-TORQUE™ AXLE - TITANIUM AXLE AND REVERSE THREAD TITANIUM FIXING BOLT - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - HOLLOW CRANKS AND SPIDER ARMS WITH ULTRA-HOLLOW™ TECHNOLOGY - CULT™ TECHNOLOGY - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED - REINFORCEMENT BRACE FOR INCREASED STIFFNESS IN AREAS OF HIGHEST TORQUE APPLICATION

NEW 12x2

SUPER RECORD™ REAR DERAILLEUR

181 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - CARBON FIBER CAGE CONSTRUCTION - PARALLELOGRAM WITH TECHNOLOGY™ EXTERNAL CONNECTING ROD WITH UD FINISH (UNIDIRECTIONAL) - TITANIUM REAR DERAILLEUR FIXING SCREW - 12-TOOTH PULLEY WHEELS - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS - COMPATIBLE WITH SPROCKET SETS 11-29, 11-32, 11-34

12x2

SUPER RECORD™ CHAIN

220 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

SUPER RECORD™ SPROCKETS

266 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET - SPROCKET SETS AVAILABLE: 11-29, 11-32, 11-34 (NEW)

SUPER RECORD™ BRAKES

311 g

MOVEMENT OF LEVERS ON BEARING - SPECIAL COMPOUND - EXCLUSIVE BRAKE PAD COUPLING/UNCOUPLING SYSTEM - DUAL PIVOT BRAKES - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION

CAMPAGNOLO® DIRECT MOUNT BRAKE

168 g*

CAMPAGNOLO® BRAKE SHOE STANDARD - FAST ASSEMBLY - FAST ADJUSTMENTS - MAXIMUM COMPATIBILITY - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION - RIGID REAR STRUCTURAL BRACE FOR POWERFUL, SAFE BRAKING - * Weight of one brake

12x2

SUPER RECORD™ ERGOPOWER™ CONTROLS

339 g

CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH - ULTRA-SHIFT™ ERGONOMICS: safe grip on handlebars in all positions and faster, more precise command on levers. VARI-CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES: natural silicone material with differentiated areas to follow the grip of the 1st and 2nd finger. The special design drains off water keeping the support cover dry and increasing grip. Internal weave to create a variable thickness that guarantees maximum comfort. ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING: Campagnolo® offers the only mechanical groupset available with the capability of shifting multiple gears (up to 5 sprockets). Multishifting allows the rider to react immediately to rapid changes in the course or necessary gearing. DERAILLEUR CABLE ADJUSTING BARREL: enables the tension of the derailleur cable to be adjusted perfectly, slashing adjustment time. DOUBLE CURVATURE BRAKE LEVER: allows you to engage and modulate the brake safely from any hand position. CUSTOM ERGONOMICS THANKS TO ADJUSTABLE BRAKE LEVER POSITION



Campagnolo's evolution is relentless, and the world of mechanical transmissions is about to change with the arrival of a new and sophisticated innovation: the 12-speed Record Disc Brake groupset. The twelfth sprocket heralds a new era for mechanical groupsets, allowing cyclists to achieve levels of versatility that have never been reached before,

matched with Campagnolo's typical quality and reliability. The design of the new Record™ 12x2 Speed groupset originated from a blank canvas, redesigning all components to improve their performance, while maintaining the same overall dimensions to retain full compatibility with the frames and wheels on the market.

12x2

RECORD™ FRONT DERAILLEUR

81 g

SPECIAL INNER CAGE DESIGN - ALUMINUM OUTER SEMI-CAGE - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE- SPLIT CONNECTING ROD FOR SMOOTH DERAILING

12x2

RECORD™ CRANKSET

708 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - NEW CHAINRINGS - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

CAMPAGNOLO® CALIPER

118 g

FLAT MOUNT STANDARD - AVAILABLE CALIPERS: 160 mm FRONT (123 g PADS INCLUDED), 140 mm AND 160 mm (115 g / 119 g PADS INCLUDED) - ADAPTER FOR USE ON 140 mm FRONT - 22mm PISTON WIDTH IN EVERY CALIPER - INTEGRATED MAGNETIC SPRING ON PISTON - 0,4 - 0,6 mm ROLL-BACK (RETURN) - PADS WITH WEAR LIMIT INDICATOR - ROUNDED EDGES ON THE PAD - ANTI VIBRATION METAL SHEET - CLEANER BIKE DESIGN - FAST AND SAFE ASSEMBLY - RETURN SPRING BETWEEN THE PADS - UNIQUE BLEND WITH ORGANIC DRY/WET RESIN

CAMPAGNOLO® 03 ROTOR

99 g

COMPATIBLE WITH CL / AFS HUBS - ROUNDED EXTERNAL EDGE - TWO DIMENSIONS AVAILABLE: 140 mm (99 g) AND 160 mm (120 g) - HIGH HEAT RESISTANCE - DIFFERENT QUANTITY OF SPOKES PER EACH DIMENSION - RIVET CONNECTION ENGINEERED TO ATTAIN SAFE DISTANCE BETWEEN ROTOR AND CALIPER, PROMOTING EFFICIENT COOLING UNDER STRESS - SEMI-FLOATING TECHNOLOGY

NEW 12x2

RECORD™ REAR DERAILLEUR

216 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - LOWER BODY IN MONOLITHIC TECHNOPOLYMER WITH CARBON ELEMENTS - ALUMINUM FRONT PLATE - PARALLELOGRAM WITH TECHNOPOLYMER EXTERNAL CONNECTING ROD - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS - COMPATIBLE WITH SPROCKET SETS 11-29, 11-32, 11-34

12x2

SUPER RECORD™ CHAIN

220 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

RECORD™ DB ERGOPOWER™ CONTROLS

463 g

CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH - NEW ERGONOMICS OF THE ERGOPOWER™ BODY - NEW BRAKE LEVER ERGONOMICS - BRAKE LEVER WITH DOUBLE CURVE - AMS™ ADJUSTMENT (ADJUSTABLE MODULATION SYSTEM) - REACH ADJUSTMENT - HYDRAULIC MASTER CYLINDER - BLEEDING PORT ON THE TOP OF THE ERGOPOWER™ - ONE LEVER ONE ACTION - VARI-CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES - ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING - DERAILLEUR CABLE ADJUSTING BARREL

12x2

SUPER RECORD™ SPROCKETS

266 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET - SPROCKET SETS AVAILABLE: 11-29, 11-32, 11-34 (NEW)



With the 12-speed Record™ groupset and Campagnolo® quality, satisfaction and victory are close at hand. With the twelfth sprocket, a new era begins. Enthusiasts will be able to gain unprecedented levels of versatility on their bikes along with the quality and reliability that Campagnolo is known for.

All of this combines with Campagnolo's experience in Dual Pivot and Direct Mount brakes to offer powerful, moduable braking in any situation, including races, without compromising on practical brake assembly or cable tension adjustment.

12x2

RECORD™ FRONT DERAILLEUR

81 g

SPECIAL INNER CAGE DESIGN - ALUMINUM OUTER SEMI-CAGE - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE- SPLIT CONNECTING ROD FOR SMOOTH DERAILING

12x2

RECORD™ CRANKSET

708 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - NEW CHAINRINGS - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

NEW 12x2

RECORD™ REAR DERAILLEUR

216 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - LOWER BODY IN MONOLITHIC TECHNOPOLYMER WITH CARBON ELEMENTS - ALUMINUM FRONT PLATE - PARALLELOGRAM WITH TECHNOPOLYMER EXTERNAL CONNECTING ROD - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS - COMPATIBLE WITH SPROCKET SETS 11-29, 11-32, 11-34

12x2

SUPER RECORD™ CHAIN

220 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

SUPER RECORD™ SPROCKETS

266 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET - SPROCKET SETS AVAILABLE: 11-29, 11-32, 11-34 (NEW)

RECORD™ BRAKES

326 g*

SPECIAL COMPOUND - EXCLUSIVE BRAKE PAD COUPLING/UNCOUPLING SYSTEM - DUAL PIVOT BRAKES - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION

CAMPAGNOLO® DIRECT MOUNT BRAKE

168 g*

CAMPAGNOLO® BRAKE SHOE STANDARD - FAST ASSEMBLY - FAST ADJUSTMENTS - MAXIMUM COMPATIBILITY - NEW FRONT LEVER DESIGN FOR MAXIMUM AERODYNAMIC PENETRATION - RIGID REAR STRUCTURAL BRACE FOR POWERFUL, SAFE BRAKING - * Weight of one brake

12x2

RECORD™ ERGOPOWER™ CONTROLS

343 g

CARBON FIBRE BRAKE LEVER WITH UNIDIRECTIONAL FINISH - ULTRA-SHIFT™ ERGONOMICS: safe grip on handlebars in all positions and faster, more precise command on levers. VARI-CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES: natural silicone material with differentiated areas to follow the grip of the 1st and 2nd finger. The special design drains off water keeping the support cover dry and increasing grip. Internal weave to create a variable thickness that guarantees maximum comfort. ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING: Campagnolo® offers the only mechanical groupset available with the capability of shifting multiple gears (up to 5 sprockets). Multishifting allows the rider to react immediately to rapid changes in the course or necessary gearing. DERAILLEUR CABLE ADJUSTING BARREL: enables the tension of the derailleur cable to be adjusted perfectly, slashing adjustment time. DOUBLE CURVATURE BRAKE LEVER: allows you to engage and modulate CUSTOM ERGONOMICS THANKS TO ADJUSTABLE BRAKE LEVER POSITION



The Chorus™ DB 12-speed groupset is available with the specific 48/32 and 11-34 combinations, suitable for those who spend hours and hours on the saddle on mixed terrain, while maintaining the racing performance guaranteed by every Campagnolo groupset.

As per tradition, the use of different materials and consequent little additional weight, together with a rear derailleur redesigned to house larger cassettes are the main elements that make the Chorus™ 12x2 Speed different from the Super Record™ and Record™ groupsets.

CHORUS™ FRONT DERAILLEUR

87 g

SPECIAL INNER CAGE DESIGN - ALUMINUM OUTER SEMI-CAGE - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE - SPLIT CONNECTING ROD FOR SMOOTH DERAILING

CHORUS™ CRANKSET

728 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - NEW CHAINRINGS - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

CHORUS™ REAR DERAILLEUR

220 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - LOWER BODY IN MONOLITHIC TECHNOPOLYMER WITH CARBON ELEMENTS - ALUMINUM FRONT PLATE - PARALLELOGRAM WITH TECHNOPOLYMER EXTERNAL CONNECTING ROD - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS

CHORUS™ CHAIN

243 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

CAMPAGNOLO® CALIPER

118 g

FLAT MOUNT STANDARD - AVAILABLE CALIPERS: 160 mm FRONT (123 g PADS INCLUDED), 140 mm AND 160 mm (115 g / 119 g PADS INCLUDED) - ADAPTER FOR USE ON 140 mm FRONT - 22mm PISTON WIDTH IN EVERY CALIPER - INTEGRATED MAGNETIC SPRING ON PISTON - 0,4 - 0,6 mm ROLL-BACK (RETURN) - PADS WITH WEAR LIMIT INDICATOR - ROUNDED EDGES ON THE PAD - ANTI VIBRATION METAL SHEET - CLEANER BIKE DESIGN - FAST AND SAFE ASSEMBLY - RETURN SPRING BETWEEN THE PADS - UNIQUE BLEND WITH ORGANIC DRY/WET RESIN

CAMPAGNOLO® ROTOR

99 g

COMPATIBLE WITH CL / AFS HUBS - ROUNDED EXTERNAL EDGE - TWO DIMENSIONS AVAILABLE: 140 mm (99 g) AND 160 mm (120 g) - HIGH HEAT RESISTANCE - DIFFERENT QUANTITY OF SPOKES PER EACH DIMENSION - RIVET CONNECTION ENGINEERED TO ATTAIN SAFE DISTANCE BETWEEN ROTOR AND CALIPER, PROMOTING EFFICIENT COOLING UNDER STRESS - SEMI-FLOATING TECHNOLOGY ON 140 mm DISC

CHORUS™ DB ERGOPOWER™ CONTROLS

488 g

ALUMINIUM BRAKE LEVER - NEW ERGONOMICS OF THE ERGOPOWER™ BODY - NEW BRAKE LEVER ERGONOMICS - BRAKE LEVER WITH DOUBLE CURVE - REACH ADJUSTMENT - HYDRAULIC MASTER CYLINDER - BLEEDING PORT ON THE TOP OF THE ERGOPOWER™ - ONE LEVER ONE ACTION - VARI-CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES - ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING - DERAILLEUR CABLE ADJUSTING BARREL

CHORUS™ SPROCKETS

310 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET



Chorus™ 12-speed groupset: the best choice for those wanting typical Campagnolo quality, cutting-edge technologies and reliability, also for endurance cycling.

No compromises have been made in this extension of the characteristics and main advantages of Super Record™ and Record™ 12-speed groupsets to the Chorus™ 12-speed groupset. In addition to this, the Chorus™ model also comes with the brand new Ultra Torque™ 32/48 crankset, together with the new 34/50 and 36/52 chainring combinations.

12x2

CHORUS™ FRONT DERAILLEUR

87 g

SPECIAL INNER CAGE DESIGN - ALUMINUM OUTER SEMI-CAGE - CSD (CHAIN SECURITY DEVICE) - DERAILLEUR CLAMP - DUAL POSITION CABLE CLOSURE ALLOWS FOR VERSATILE CABLE POSITION AND BETTER TIRE CLEARANCE- SPLIT CONNECTING ROD FOR SMOOTH DERAILING

12x2

CHORUS™ CRANKSET

728 g

FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - NEW CHAINRINGS - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

12x2

CHORUS™ REAR DERAILLEUR

220 g

UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - 3D EMBRACE TECHNOLOGY™ - LOWER BODY IN MONOLITHIC TECHNOPOLYMER WITH CARBON ELEMENTS - ALUMINUM FRONT PLATE - PARALLELOGRAM WITH TECHNOPOLYMER EXTERNAL CONNECTING ROD - JOINT FOR MOUNTING ON STANDARD OR DIRECT MOUNT DROP-OUTS

12x2

CHORUS™ CHAIN

241 g

ULTRA-LINK™ CHAIN LINK CONNECTING SYSTEM - ULTRA-LINK™ CHAIN LINKS: designed to provide maximum performance to Campagnolo® transmissions: longer life for chainrings and sprockets, maximum efficiency in power transmission.

12x2

CHORUS™ ERGOPOWER™ CONTROLS

362 g

ALUMINIUM BRAKE LEVER
ULTRA-SHIFT™ ERGONOMICS: safe grip on handlebars in all positions and faster, more precise command on levers.
VARI CUSHION™ BRAKE LEVER HOODS WITH VARIABLE DENSITY AND SURFACE FINISHES: natural silicone material with differentiated areas to follow the grip of the 1st and 2nd finger. The grooved areas drain away water, keeping the brake lever hoods dry and improving grip. Internal weave to create a variable thickness that guarantees maximum comfort.
ULTRA-SHIFT™ FUNCTION ALLOWS FOR MULTIPLE SHIFTING AND GREATER CONTROL FOR RACING: Campagnolo® offers the only mechanical groupset available with the capability of shifting multiple gears (up to 5 sprockets). Multishifting allows the rider to react immediately to rapid changes in the course or necessary gearing.
DERAILLEUR CABLE ADJUSTING BARREL: enables the tension of the derailleur cable to be adjusted perfectly, slashing adjustment time.
DERAILLEUR CABLE ADJUSTING BARREL: enables the tension of the derailleur cable to be adjusted perfectly, slashing adjustment time.
CUSTOM ERGONOMICS THANKS TO ADJUSTABLE BRAKE LEVER POSITION

12x2

CHORUS™ SPROCKETS

310 g

ULTRA-SHIFT™ TEETH DESIGN - ULTRA-SHIFT™ SYNCHRONIZATION - LAST TWO TRIPLETS MACHINED FROM MONOLITHIC STEEL FOR STIFFER STRUCTURE, LOWER WEIGHT AND PRECISE SHIFTING - CHAIN RETENTION TEETH ON 12TH SPROCKET

CHORUS™ BRAKES

318 g*

SKELETON BRAKE ARMS: no-bend arms, modularity, reduced weight - SPECIAL COMPOUND - EXCLUSIVE BRAKE PAD COUPLING/UNCOUPLING SYSTEM: fast and secure brake pad replacement - * Dual pivot front/rear

DIRECT™ DIRECT MOUNT BRAKE

183 g*

UNIVERSAL BRAKE SHOE - AERODYNAMIC DESIGN: the solid structure of the front and rear brake shoe levers allows for highly aerodynamic performance - FAST ASSEMBLY - FAST ADJUSTMENTS: screws oriented in a direction that allows for the fastest adjustment while guaranteeing easy access to adjustment screws - * one brake weight



The premium aluminum offering from Campagnolo®, the **Potenza 11™ disc brake** groupset combines the performance of the top end groups with the increased versatility of a rear derailleur capable of incorporating up to 32 tooth

cassettes. Add Campagnolo® disc brake technology and you have a groupset that is ready to take on anything that the road may put ahead of you!

POTENZA 11™ REAR DERAILLEUR

206 g

NEW UPPER BODY WITH HO (HYDRAULIC OPTIMIZATION) GEOMETRY - UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - EMBRACE TECHNOLOGY™ - REVOLUTION 11+ INSPIRED DESIGN - UPPER BODY IN ULTRA-LIGHT TECHNOLOGY™ CONSTRUCTION - TRAVEL LIMIT SCREW: easy to reach, positioned on the back of the upper body - UPPER AND LOWER PULLEY WHEELS WITH BUSHINGS

POTENZA 11™ FRONT DERAILLEUR

94 g

HIGH-END DESIGN - STEEL CAGE - NEW CAGE MOUNTING POSITION - SPECIFIC TRAJECTORY MADE BY THE NEW KINEMATIC: great fluency and smoothness during the upshifting. The cage angle allows to have a silent transmission even for extreme crossovers - NEW ROD DESIGN: the outer rod is redesigned in order to improve the force-displacement curve allowing to increase the shifting forces and the performances also when the rider is shifting when pushing hard on his pedals

POTENZA 11™ REAR DERAILLEUR - MEDIUM

211 g

NEW UPPER BODY WITH HO (HYDRAULIC OPTIMIZATION) GEOMETRY - UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - EMBRACE TECHNOLOGY™ - REVOLUTION 11+ INSPIRED DESIGN - MEDIUM CAGE: Potenza 11™ groupset introduced the capability to use an 11-32 cassette. The medium cage [72,5mm] is designed for larger cassette use - UPPER BODY IN ULTRA-LIGHT TECHNOLOGY™ CONSTRUCTION - TRAVEL LIMIT SCREW - UPPER AND LOWER PULLEY WHEELS WITH BUSHINGS

CAMPAGNOLO 11™ CHAIN

256 g

WIDER LINK DESIGN: the new design of the Campagnolo® 11™ chain increases shifting performance and reduces the noise from chainring and sprocket engagement - ULTRA-LINK™ CHAIN CONNECTING SYSTEM: high strength chain connection - greater safety and longer chain life

CAMPAGNOLO 11™ SPROCKETS

251 g

NEW CASSETTE LAYOUT: the new Campagnolo 11™ cassette, based on one triplet (25-28-32) and 8 single sprockets with aluminum spacers between them, enables consistently responsive, fast and precise shifting at only 251 g (11-25 spec) - FIVE CASSETTE RANGES CAMPAGNOLO 11™ NAMED: 11-25, 11-27, 11-29, 11-32, 12-27

POTENZA 11™ CRANKSET

801 g

HO (HYDRAULIC OPTIMIZATION) GEOMETRY - FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

CAMPAGNOLO® CALIPER

118 g

FLAT MOUNT STANDARD - AVAILABLE CALIPERS: 160 mm FRONT (123 g PADS INCLUDED), 140 mm AND 160 mm (115 g / 119 g PADS INCLUDED) - ADAPTER FOR USE ON 140 mm FRONT - 22mm PISTON WIDTH IN EVERY CALIPER - INTEGRATED MAGNETIC SPRING ON PISTON - 0,4 - 0,6 mm ROLL-BACK (RETURN) - PADS WITH WEAR LIMIT INDICATOR - ROUNDED EDGES ON THE PAD - ANTI VIBRATION METAL SHEET - CLEANER BIKE DESIGN - FAST AND SAFE ASSEMBLY - RETURN SPRING BETWEEN THE PADS - UNIQUE BLEND WITH ORGANIC DRY/WET RESIN

POTENZA 11™ DB ERGPOWER™ CONTROLS

504 g

ALUMINIUM BRAKE LEVER - HO (HYDRAULIC OPTIMIZATION) INNER MECHANISM - NEW ERGONOMICS OF THE EP BODY - NEW BRAKE LEVER ERGONOMICS - BRAKE LEVER WITH DOUBLE CURVE - AMS™ ADJUSTMENT (ADJUSTABLE MODULATION SYSTEM) - REACH ADJUSTMENT - HYDRAULIC MASTER CYLINDER - BLEEDING PORT ON THE TOP OF THE ERGPOWER™ - ONE LEVER ONE ACTION - HOODS IN SILICON MATERIAL WITH VARI-CUSHION™ TECHNOLOGY - POWER-SHIFT™ MECHANISM - DERAILLEUR CABLE ADJUSTING BARREL

CAMPAGNOLO® ROTOR

99 g

COMPATIBLE WITH CL / AFS HUBS - ROUNDED EXTERNAL EDGE - TWO DIMENSIONS AVAILABLE: 140 mm (99 g) AND 160 mm (120 g) - HIGH HEAT RESISTANCE - DIFFERENT QUANTITY OF SPOKES PER EACH DIMENSION - RIVET CONNECTION ENGINEERED TO ATTAIN SAFE DISTANCE BETWEEN ROTOR AND CALIPER, PROMOTING EFFICIENT COOLING UNDER STRESS - SEMI-FLOATING TECHNOLOGY ON 140 mm DISC



The highest-tier aluminum groupset available offers the same race-winning shifting performance as its carbon fiber counterparts seen atop professional rider's bikes. **Potenza 11™** is designed around the strengths that made

its higher tier Revolution 11+ brethren so successful: Embrace Technology™, fantastic ergonomics, Campagnolo® performance, reliability and design.

POTENZA 11™ REAR DERAILLEUR

206 g

NEW UPPER BODY WITH HO (HYDRAULIC OPTIMIZATION) GEOMETRY - UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - EMBRACE TECHNOLOGY™ - REVOLUTION 11+ INSPIRED DESIGN - UPPER BODY IN ULTRA-LIGHT TECHNOLOGY™ CONSTRUCTION - TRAVEL LIMIT SCREW: easy to reach, positioned on the back of the upper body - UPPER AND LOWER PULLEY WHEELS WITH BUSHINGS

POTENZA 11™ FRONT DERAILLEUR

94 g

HIGH-END DESIGN - STEEL CAGE - NEW CAGE MOUNTING POSITION - SPECIFIC TRAJECTORY MADE BY THE NEW KINEMATIC: great fluency and smoothness during the upshifting. The cage angle allows to have a silent transmission even for extreme crossovers - NEW ROD DESIGN: the outer rod is redesigned in order to improve the force-displacement curve allowing to increase the shifting forces and the performances also when the rider is shifting when pushing hard on his pedals

POTENZA 11™ REAR DERAILLEUR - MEDIUM

211 g

NEW UPPER BODY WITH HO (HYDRAULIC OPTIMIZATION) GEOMETRY - UPPER PULLEY WHEELS WITH LONGER TEETH - LOWER PULLEY WHEELS WITH ROUNDED TEETH - EMBRACE TECHNOLOGY™ - REVOLUTION 11+ INSPIRED DESIGN - MEDIUM CAGE: Potenza 11™ groupset introduced the capability to use an 11-32 cassette. The medium cage [72,5mm] is designed for larger cassette use - UPPER BODY IN ULTRA-LIGHT TECHNOLOGY™ CONSTRUCTION - TRAVEL LIMIT SCREW - UPPER AND LOWER PULLEY WHEELS WITH BUSHINGS

CAMPAGNOLO 11™ CHAIN

256 g

WIDER LINK DESIGN: the new design of the Campagnolo® 11™ chain increases shifting performance and reduces the noise from chainring and sprocket engagement - ULTRA-LINK™ CHAIN CONNECTING SYSTEM: high strength chain connection - greater safety and longer chain life

CAMPAGNOLO 11™ SPROCKETS

251 g

NEW CASSETTE LAYOUT: the new Campagnolo 11™ cassette, based on one triplet (25-28-32) and 8 single sprockets with aluminum spacers between them, enables consistently responsive, fast and precise shifting at only 251 g (11-25 spec) - FIVE CASSETTE RANGES CAMPAGNOLO 11™ NAMED: 11-25, 11-27, 11-29, 11-32, 12-27

POTENZA 11™ ERGOWPOWER™ CONTROLS

372 g

ALUMINIUM BRAKE LEVER
HO (HYDRAULIC OPTIMIZATION) INNER MECHANISM - COMPATIBLE WITH POTENZA 11™ HO CRANKSET.
NEW POWER-SHIFT™ MECHANISM: Campagnolo® engineers have taken the current Power-Shift™ mechanism and introduced a new material in the internal mechanism that renders this new version even more reliable and long lasting than before
NEW DESIGN BAR/COMMAND INTERFACE: allows for perfect alignment with vast range of modern curved handlebars
DOWNSHIFT LEVER POSITION: fantastic ergonomics derived from EPS™ commands. Allows for complete control no matter your hand position
POTENZA 11™ SPECIFIC HOOD DESIGN: classic Campagnolo® ergonomics offering fantastic mobility and comfort. Surface studied to insure water drains away ensuring a safe grip in any condition
HOODS IN SILICON MATERIAL WITH VARI-CUSHION™ TECHNOLOGY: high levels of comfort even after long training sessions thanks to the meticulously studied and developed Vari-Cushion™ design

POTENZA 11™ CRANKSET

801 g

HO (HYDRAULIC OPTIMIZATION) GEOMETRY - FULL COMPATIBILITY WITH DISC AND RIM BRAKE FRAMES - Q FACTOR MAINTAINED AT 145,5 mm - ULTRA-TORQUE™ AXLE - OPTIMIZED UPSHIFTING PINS FOR EACH CHAINRING COMBINATION - 8 BOLT RETENTION DESIGN INCREASES EFFICIENCY - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

POTENZA 11™ BRAKES

319 g*

SPECIAL BRAKE COMPOUND: better braking performance in all weather conditions - less wear on the braking track - SKELETON BRAKE ARMS: no-bend arms, modularity, reduced weight - DUAL PIVOT FRONT/REAR: enhanced braking at the rear - * front and rear weight

DIRECT™ DIRECT MOUNT BRAKE

183 g*

UNIVERSAL BRAKE SHOE - AERODYNAMIC DESIGN: the solid structure of the front and rear brake shoe levers allows for highly aerodynamic performance - FAST ASSEMBLY - FAST ADJUSTMENTS: screws oriented in a direction that allows for the fastest adjustment while guaranteeing easy access to adjustment screws - * one brake weight



The **Centaur™** Rim Brake 11 speed groupset represents Campagnolo® continuous innovation and is a prime example of how top tier technology trickles down to permeate the entire range.

Campagnolo's initial offering comes as an affordable solution while guaranteeing performance generally associated with premium products.

CENTAUR™ REAR DERAILLEUR

230 g

REDESIGNED REAR DERAILLEUR TRAJECTORY ANGLE (45°) - ONE REAR DERAILLEUR AVAILABLE FOR EVERY SETUP COMBINATION - PULLEY WHEELS WITH BUSHINGS - UPPER PULLEY WHEEL WITH LONGER TEETH - LOWER PULLEY WHEEL WITH ROUNDED TEETH - UPPER AND LOWER BODY IN ULTRA-LIGHT TECHNOLOGY POLYMER REINFORCED WITH GLASS FIBRE - LIMIT SCREWS POSITIONED ON THE BACK OF THE UPPER BODY

CENTAUR™ FRONT DERAILLEUR

103 g

SUPER RECORD™ INFLUENCED DESIGN - ONE-PIECE STEEL CAGE - SHAPED OUTER SEMI-CAG: improve the downshifting speed and chain control during upshifting - NEW ROD DESIGN

CENTAUR™ ERGOPOWER™ CONTROLS

373 g

ALUMINIUM BRAKE LEVER - REDESIGNED RIGHT POWER-SHIFT™ MECHANISM - MULTIPLE UPSHIFTING (UP TO 3 GEARS) - ERGONOMIC DOWNSHIFT LEVER POSITION - NEW LIP INTRODUCED ON THE ERGOPOWER™ BODY - GEOMETRY SPECIFICALLY DESIGNED TO OPTIMIZE COMMAND/HANDLEBAR INTERFACE - HOODS WITH GROOVED ZONES - HOODS IN SILICON WITH VARI-CUSHION™ TECHNOLOGY - LEFT POWER-SHIFT™ MECHANISM COMPATIBLE WITH CENTAUR™ CRANKSET - DOWNWARD MOVEMENT OF THE CHAIN BLOCKED AT 1ST ACTION

CENTAUR™ BRAKES

325 g*

FORGED ALUMINUM SOLID BRAKE ARMS - ADJUSTABLE BRAKE PADS - SPECIAL BRAKE PAD COMPOUND, REDUCING BRAKING DISTANCE IN BOTH DRY AND WET CONDITIONS. THE MOST APPRECIATED BRAKE PADS ON THE MARKET - * front and rear weight

CENTAUR™ SPROCKETS

291 g

SPECIFIC CASSETTES DEVELOPED WITH THE "CAMPAGNOLO 11™" LAYOUT WITH SPECIFIC FINISHING - THREE CASSETTE SPECS AVAILABLE: 11-32, 12-32, 11-29 11-32 CASSETTE WITH THE SPROCKET COMBINATION: 11-12-13-14-15-17-19-22-25-28-32

CAMPAGNOLO 11™ CHAIN

256 g

WIDER LINK DESIGN: the new design of the Campagnolo® 11™ chain increases shifting performance and reduces the noise from chainring and sprocket engagement - ULTRA-LINK™ CHAIN CONNECTING SYSTEM: high strength chain connection - greater safety and longer chain life

CENTAUR™ CRANKSET

875 g

FOUR ARM DESIGN - TWO CHAINRING COMBINATIONS: 52/36 AND 50/34 - ONE SINGLE CRANK FOR BOTH CHAINRING COMBINATIONS - OPTIMIZED INNER SURFACE ON BOTH CRANKS - ULTRA-TORQUE™ AXLE - CHAINRING INNER DESIGN OPTIMIZED PER EACH COMBINATION - THREE CRANK LENGTHS AVAILABLE: 170, 172,5 AND 175 mm - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

DIRECT™ DIRECT MOUNT BRAKE

183 g*

UNIVERSAL BRAKE SHOE - AERODYNAMIC DESIGN: the solid structure of the front and rear brake shoe levers allows for highly aerodynamic performance - FAST ASSEMBLY - FAST ADJUSTMENTS: screws oriented in a direction that allows for the fastest adjustment while guaranteeing easy access to adjustment screws - * one brake weight



The **new Centaur™** Rim Brake 11 speed groupset represents Campagnolo® continuous innovation and is a prime example of how top tier technology trickles down to permeate the entire range. Campagnolo® quality reliability and

design available in a very versatile package, not only in regards to gearing but also thanks to its **additional silver finish option**, unique to Campagnolo®.

CENTAUR™ REAR DERAILLEUR

230 g

REDESIGNED REAR DERAILLEUR TRAJECTORY ANGLE (45°) - ONE REAR DERAILLEUR AVAILABLE FOR EVERY SETUP COMBINATION - PULLEY WHEELS WITH BUSHINGS - UPPER PULLEY WHEEL WITH LONGER TEETH - LOWER PULLEY WHEEL WITH ROUNDED TEETH - UPPER AND LOWER BODY IN ULTRA-LIGHT TECHNOLOGY POLYMER REINFORCED WITH GLASS FIBRE - LIMIT SCREWS POSITIONED ON THE BACK OF THE UPPER BODY

CENTAUR™ FRONT DERAILLEUR

103 g

SUPER RECORD™ INFLUENCED DESIGN - ONE-PIECE STEEL CAGE - SHAPED OUTER SEMI-CAG: improve the downshifting speed and chain control during upshifting - NEW ROD DESIGN

CENTAUR™ SPROCKETS

291 g

SPECIFIC CASSETTES DEVELOPED WITH THE "CAMPAGNOLO 11™" LAYOUT WITH SPECIFIC FINISHING - THREE CASSETTE SPECS AVAILABLE: 11-32, 12-32, 11-29 11-32 CASSETTE WITH THE SPROCKET COMBINATION: 11-12-13-14-15-17-19-22-25-28-32

CAMPAGNOLO 11™ CHAIN

256 g

WIDER LINK DESIGN: the new design of the Campagnolo® 11™ chain increases shifting performance and reduces the noise from chainring and sprocket engagement - ULTRA-LINK™ CHAIN CONNECTING SYSTEM: high strength chain connection - greater safety and longer chain life

CENTAUR™ ERGPOWER™ CONTROLS

373 g

ALUMINIUM BRAKE LEVER - REDESIGNED RIGHT POWER-SHIFT™ MECHANISM - MULTIPLE UPSHIFTING (UP TO 3 GEARS) - ERGONOMIC DOWNSHIFT LEVER POSITION - NEW LIP INTRODUCED ON THE ERGPOWER™ BODY - GEOMETRY SPECIFICALLY DESIGNED TO OPTIMIZE COMMAND/HANDLEBAR INTERFACE - HOODS WITH GROOVED ZONES - HOODS IN SILICON WITH VARI-CUSHION™ TECHNOLOGY - LEFT POWER-SHIFT™ MECHANISM COMPATIBLE WITH CENTAUR™ CRANKSET - DOWNWARD MOVEMENT OF THE CHAIN BLOCKED AT 1ST ACTION

CENTAUR™ CRANKSET

875 g

FOUR ARM DESIGN - TWO CHAINRING COMBINATIONS: 52/36 AND 50/34 - ONE SINGLE CRANK FOR BOTH CHAINRING COMBINATIONS - OPTIMIZED INNER SURFACE ON BOTH CRANKS - ULTRA-TORQUE™ AXLE - CHAINRING INNER DESIGN OPTIMIZED PER EACH COMBINATION - THREE CRANK LENGTHS AVAILABLE: 170, 172,5 AND 175 mm - CAMPAGNOLO® ULTRA-TORQUE™ BB CUPS REQUIRED

CENTAUR™ BRAKES

325 g*

FORGED ALUMINUM SOLID BRAKE ARMS - ADJUSTABLE BRAKE PADS - SPECIAL BRAKE PAD COMPOUND, REDUCING BRAKING DISTANCE IN BOTH DRY AND WET CONDITIONS. THE MOST APPRECIATED BRAKE PADS ON THE MARKET - * front and rear weight

WHEELS



WHEEL TECHNOLOGIES

AERO CARBON WHEELS

BORA™ ULTRA™ TT	Rim Brake	130
BORA™ WTO 77	Rim Brake	131
BORA™ WTO 60	Rim Brake	132
BORA™ WTO 45	Rim Brake	133
BORA™ WTO 33	Disc Brake - Rim Brake	134 - 135
	Disc Brake - Rim Brake	136 - 137

PERFORMANCE CARBON WHEELS

BORA™ ULTRA™ 50	Rim Brake	138
BORA™ ULTRA™ 35	Rim Brake	140
BORA™ ONE™ 50	Rim Brake	141
BORA™ ONE™ 35	Disc Brake - Rim Brake	142 - 143
	Disc Brake - Rim Brake	144 - 145

ALUMINIUM WHEELS

SHAMAL™ MILLE	Rim Brake	146
SHAMAL™ ULTRA™	Rim Brake	147
ZONDA™	Disc Brake - Rim Brake	148 - 149
SCIROCCO™	Disc Brake - Rim Brake	150 - 151
KHAMSIN™	Disc Brake - Rim Brake	152 - 153
CALIMA™	Rim Brake	154
	Rim Brake	155



BORA™ WTO Project

Campagnolo® launches the new
Wind Tunnel Optimized Bora™ Wheels

The Campy Tech Lab dedicated its energies towards pushing the limits of aerodynamic efficiency even further. The result of this task force's labor comes in the form of the wheels Bora™ WTO 77, Bora™ WTO 60, Bora™ WTO 45 and the new Bora™ WTO 33 rim and disc brake.

WTO Wind Tunnel Optimized




Such a task saw the engineering team spending as many hours in the wind tunnel as in the office

hence the moniker of WTO

Overall efficiency must be improved by reducing the energy requirement necessary to overcome three important factors:

- aerodynamic resistance
- rolling resistance
- weight/gradient

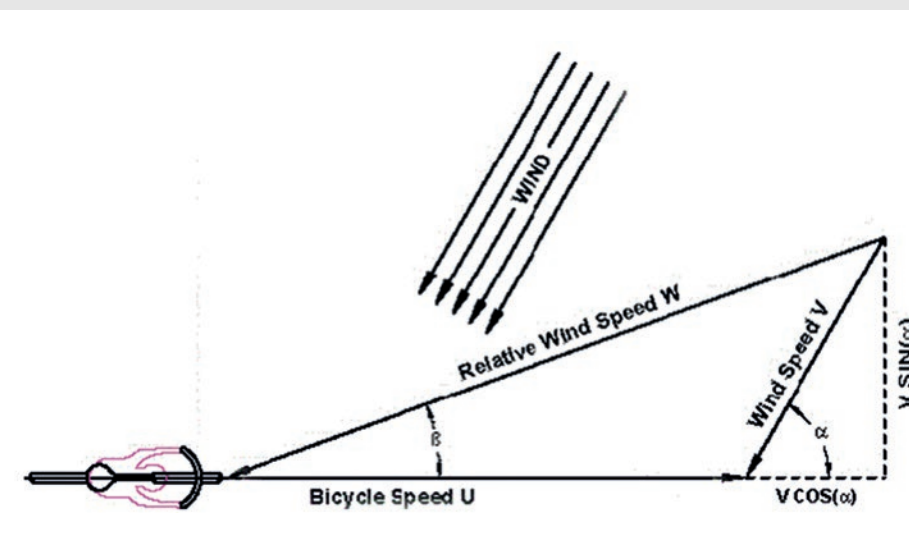


Wind effect is barely ever straightforward:

apparent wind must be accounted for

To Improve the aerodynamic efficiency of the Bora™:

creation of Campagnolo engineering task force wholly dedicated to creating the new aero standard

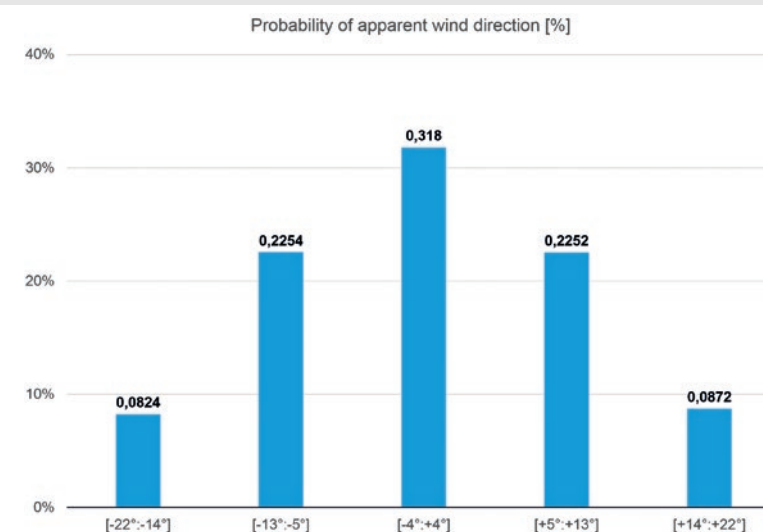

Athletes will encounter a myriad of different wind angles during any given ride:

probability of apparent wind direction [%]

athletes don't race in wind tunnels

nature does not create wind in a uniform manner or from the same direction

Race courses aren't typically straight



Riders don't maintain a perfect position



Campagnolo engineers set about to account for all of these variables in what has come to represent perhaps the most comprehensive aerodynamic study ever performed by the company to produce wheels





WTO Wind Tunnel Optimized for REAL WORLD CONDITIONS

Numerous real world tests performed on two different continents

THROUGH: CFD and FEM analysis

the Campagnolo engineering team produced two aerodynamic profiles that confer the most efficient structure available on the market in terms of drag reduction

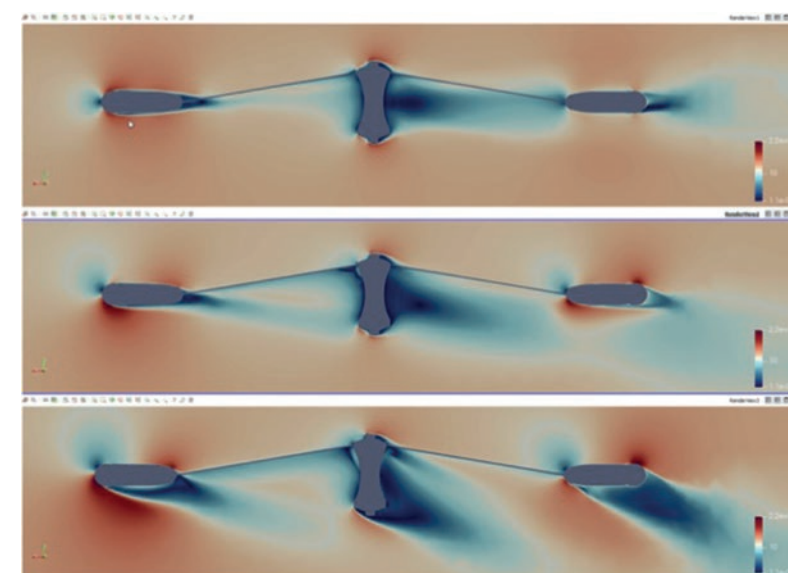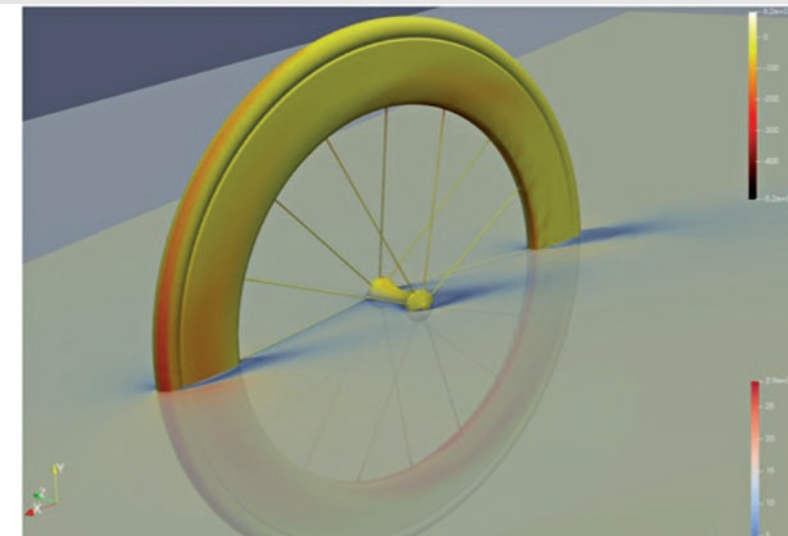


Wind angle: 0°

Wind angle: 10°

Wind angle: 20°

Bora™ WTO 77 45 k/h

The Campagnolo engineering team produced two aerodynamic profiles that confer the most efficient structure available on the market in terms of drag reduction

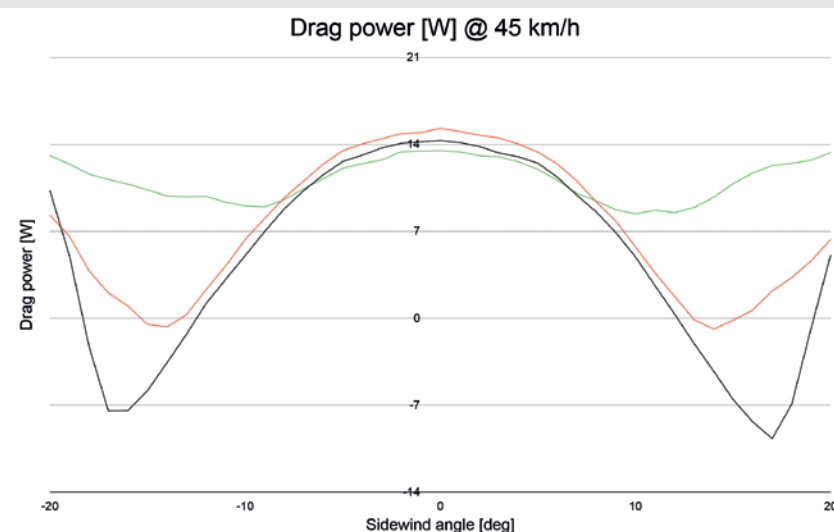

Aerodynamic Hubs:


Aluminum construction

follows the same design premise of the rim in that it must be aerodynamic in a versatile manner

slimmer towards the center and growing in width towards the flanges

Bora™ WTO 77 55 k/h

The Campagnolo engineering team produced two aerodynamic profiles that confer the most efficient structure available on the market in terms of drag reduction

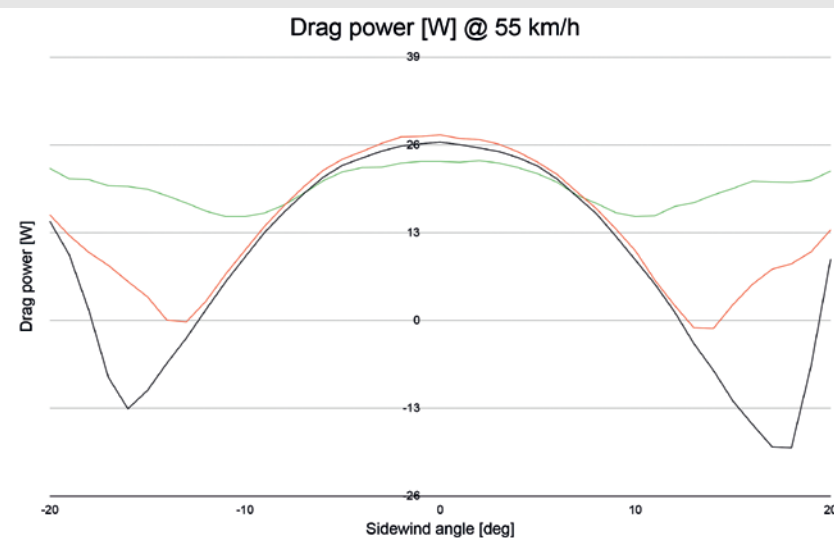

Aerodynamic Spokes:

3D Aero profile

not merely flat but diamond shaped

efficient design that accounts for varied wind conditions

Bora™ WTO rim shape at both 77 - 60 - 45 - 33 mm:

efficient to the point that it not only reduces drag, but at certain angles is capable of reducing it to the point of negative drag



Reduced number of spokes:

16 spokes for Bora WTO 77 mm front wheel

18 spokes for Bora WTO 60, 45 and 33 mm Rim Brake front wheel

21 spokes for Bora WTO 45 mm Disc Brake front wheel


21/G3 spokes for Bora WTO 60, 45 and 33 mm rear wheel

24/G3 spokes for Bora WTO 33 mm Disc Brake

Bora™ WTO 60, 45 and 33 with oversized drive side flange and G3™ spoke pattern

The oversized flange allows for symmetric spoke angles which increase torsional rigidity and result in a more reactive wheel.

The G3 spoke pattern incorporates twice as many spokes on the side of highest torque application. Doing so reduces the force applied to each single spoke and increases the rigidity of the overall wheel.

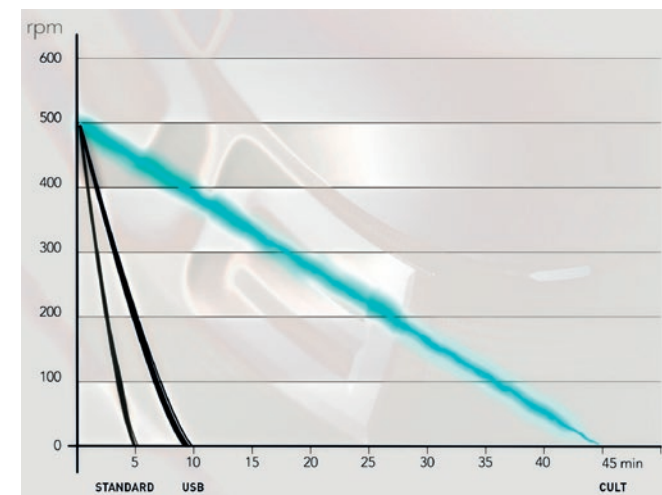


Bora™ WTO 60, 45 and 33 USB™ Ceramic Bearings:

Long lasting

Superior Performance

19mm internal width:

more efficient rim already called for a wider stance in general

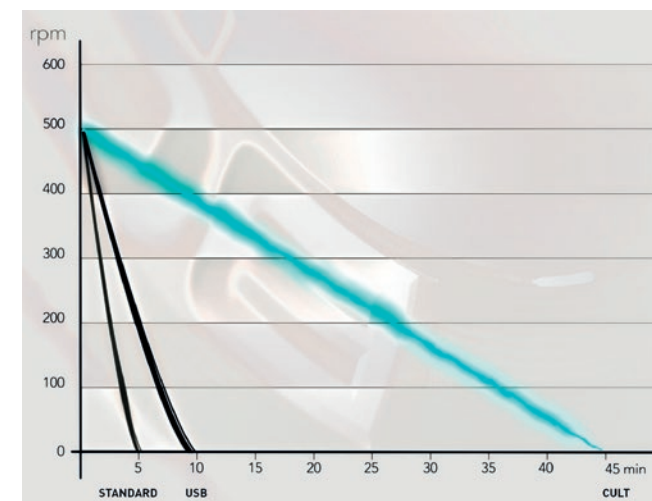


Bora™ WTO 60 CULT™ Ceramic Bearings:

9 x more efficient than standard bearings

The 19mm internal width structure provided the multiple benefit of a better performing rim design:

better fit with the tire sizes [23, 25 and 28 mm]

overall more efficient complete unit (tire + rim) tires take on more aerodynamic shape, rendering both the single component and complete unit more efficient

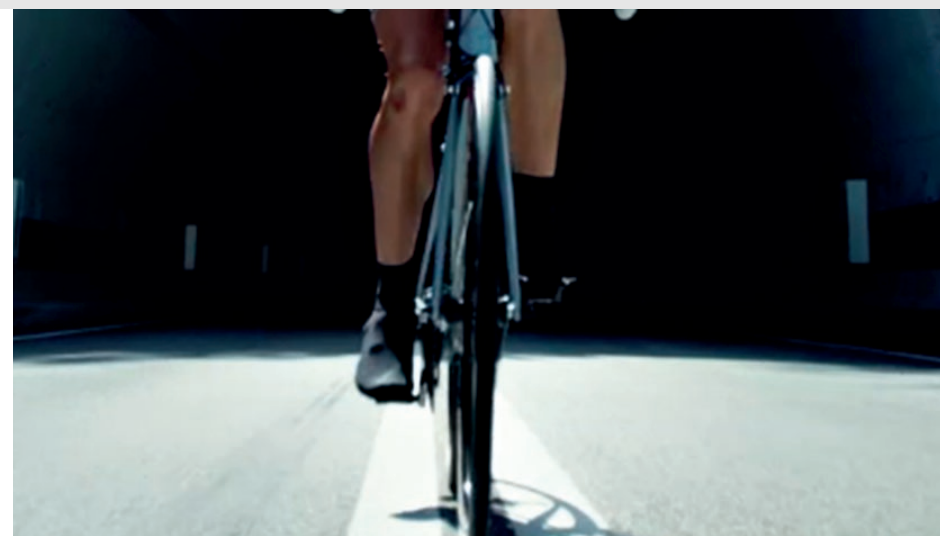

Rolling resistance is also created where contact between tire and road occurs

A carbon fiber, 2-WAY-FIT™ profile in order to offer the possibility to choose between the two most efficient solutions available is the best solution

Contrary to popular belief, the tubular was the worst performer in terms of rolling resistance

Optimized Construction for Optimum Performance

The lightweight yet extremely reliable performance of the Bora WTO wheels comes about thanks to optimizing the employment of extra carbon fiber only in areas where integrity and performance could be improved and likewise eliminating any material that wasn't completely necessary to maintain the Campagnolo quality standard.




Bora™ WTO 60:

688 g for the front and 859 g for the rear makes for a 1547 g total package

AC3 braking surface

Water transfer labels

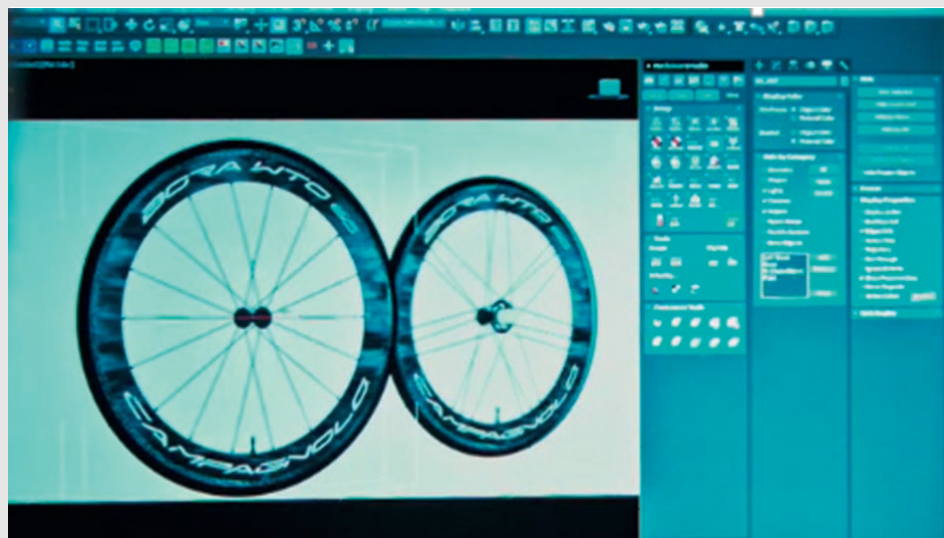

Bora™ WTO 45 Rim brake:

657 g for the front and 839 g for the rear makes for a 1496 g total package

AC3 braking surface

Water transfer labels

Bora™ WTO 77:

available only as a front wheel considering its specific use for TT and Triathlon

weighs an amazingly low 755 g

AC3 braking surface

Water transfer labels



Bora™ WTO 45 Disc brake:

708 g for the front and 812 g for the rear makes for a 1520 g total package

Water transfer labels



DISC BRAKE WHEELS

With the arrival of disc brakes into the ranks of not only the professional peloton but also amongst competitive and passionate cyclists all over the world, the demand for a disc brake wheelset truly worthy of the Campagnolo® name made the development of such a wheel a necessity.

As a result, Campagnolo® engineers have worked tirelessly to create wheels those will come to represent the same standard for quality and performance as its rim-brake counterpart.


As disc brake transmissions become ever more popular, many brands have rushed to improvise disc brake wheelsets by simply taking the rims from their rim-brake offering and lacing them to disc brake hubs. Campagnolo® regards this as a compromise in performance, reliability and product integrity.

In fact, for the front wheel the braking forces on the disc side require an additional structural design. Just as occurs in the rear wheel, the asymmetric forces are combatted by using the G3™ spoke design. The front wheel utilises the double spokes on the disc side.

With the incorporation of Mega-G3™ spoke pattern, the hub manages the asymmetric forces generated by the disc brakes.



Modified version of the famous G3™ spoke pattern on the rear wheel

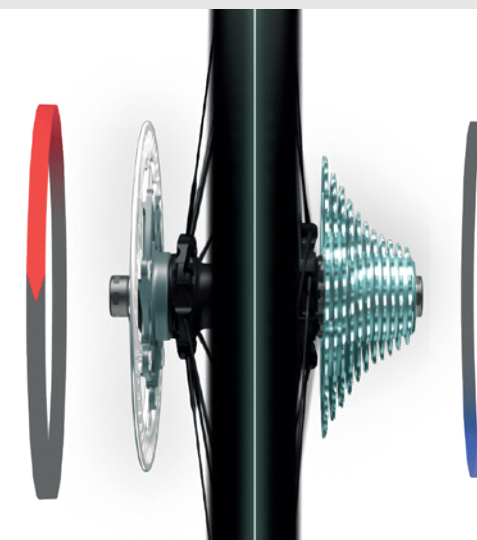

One piece solid construction to compensate for asymmetric forces from disc brakes




Modified version of the famous G3™ spoke pattern on the front wheel



2-WAY FIT™

2-WAY FIT™ READY

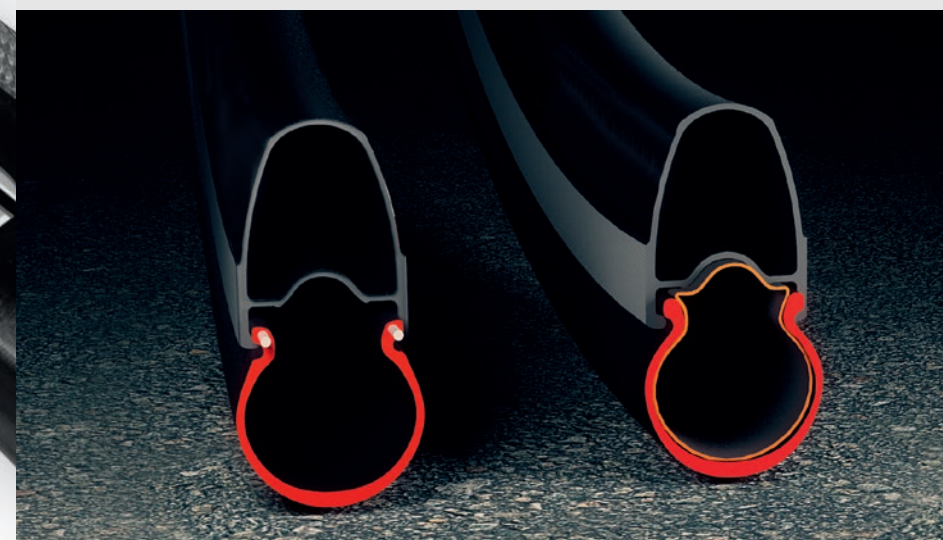

2-Way Fit™ technology makes it possible to mount either tubeless or clincher tires on the same rim.

With 2-Way Fit™ Campagnolo® customers can decide on any given day to use either clincher or tubeless tires as the wheel is perfectly compatible with both systems.

With no doubt tubeless tires are the future of road cycling. Apart from greater comfort, the advantages are many: using a tubeless tire you can exploit the greater smoothness due to the absence of friction between the tire and the tube.

And what if the tubeless tire has a puncture? The Campagnolo® 2-Way Fit™ system allows you to use a traditional inner tube by simply removing the hermetic closure valve to ride home with no problem.

The tubeless tire does not have an inner tube and consequently there is no risk of sudden deflation due to punctures.

The tubeless tire rolls more smoothly thanks to the absence of friction between tire and inner tube.



2-Way Fit™ Ready

Scirocco Disc Brake wheel can be converted in a 2-Way Fit™ Ready. Only the Tubeless Easy (TL-Easy) tyres by Schwalbe Pro One and G-One have been tested and approved for the Tubeless Easy conversion with the Campagnolo 2-Way Fit™ Ready profile.

AC3™ All Conditions Carbon Control

Campagnolo® has developed the All Conditions Carbon Control, or AC3™ Technology. The introduction of the meticulously researched textured design of the rim brake area of the Bora™ wheels creates a surefooted stopping power that is reliable and potent no matter what the weather will throw at you.




CULT™ Ceramic Ultimate Level Technology

Technologically advanced superior quality ceramic bearings in addition to the precision machining of the cup/cone structure and absence of grease drastically reduce friction and increase the smoothness of the wheel by as much as 9 times when compared to standard bearings. An outstanding result achieved by using cutting-edge technologies of materials processing.



USB™ Ceramic Ultra Smooth Bearings

The hubs with USB™ (Ultra Smooth Bearings) ceramic bearings increase smoothness, decrease rolling resistance, reduce weight and reduce the need for maintenance. Comparative tests have shown that USB™ bearings are 50% smoother than standard bearings. Now improving your performance during the race will be easier.

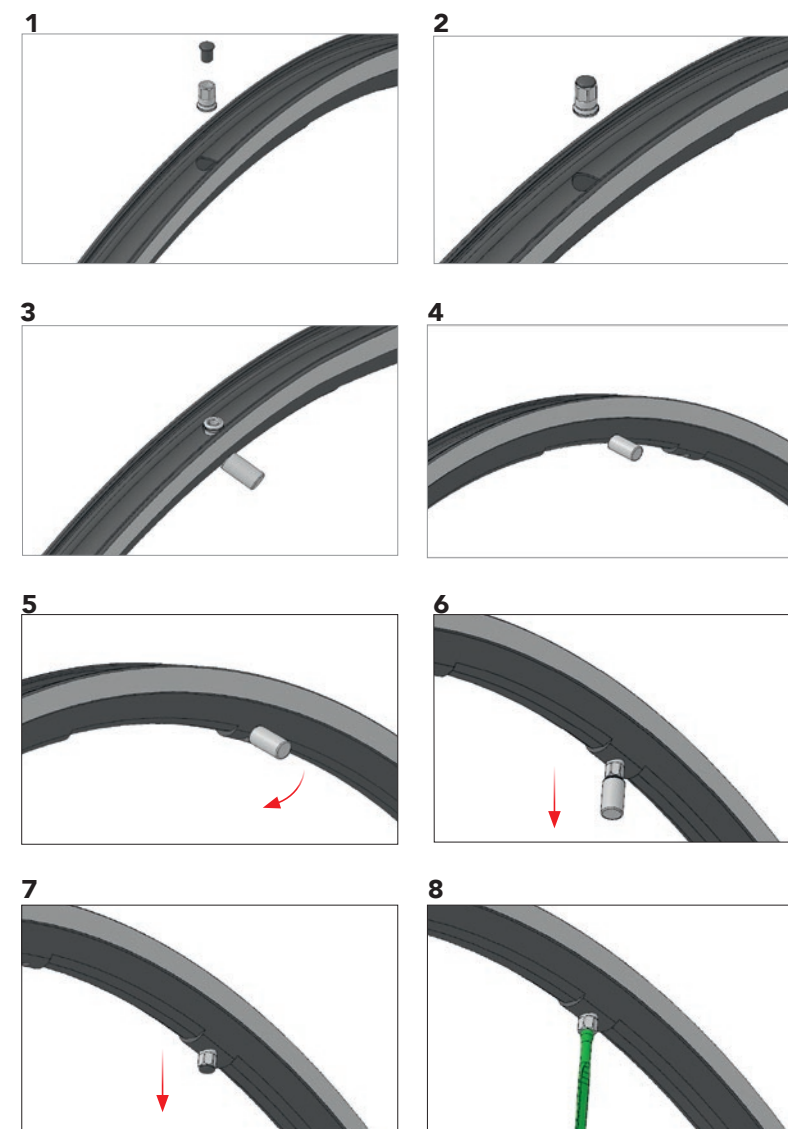

MoMag™

What is MoMag?

A technology that offers several advantages to the structural integrity of the wheel as well as eliminating the need for rim tape. The name derives from "Mounting Magnet" system, shortened to MoMag™.

The nipples, once inserted inside the rim via the valve hole, are "guided" to the point of connection with the spoke by means of the magnet. This simple but ingenious system makes it possible to have a wheel without holes on the upper bridge, but with spokes tensioned by traditional nipples!

No holes on the rim means that the rim is uniform at every point, free from stress points or zones of weakness and, for the clincher profiles no rim tape is required, to the benefit of weight reduction. The advantages are clear: greater rim lifetime, greater resistance to fatigue, the possibility to give the spokes greater tension, and greater stiffness which, in terms of performance, mean greater reactivity and acceleration. The advantages also include quick and simple maintenance and spoke replacement.

Spoke Antirotation System

The Bora™, Bullet™, Shama™, Eurus™, Zonda™ and Scirocco™ wheels feature a spoke antirotation system patented by Campagnolo® that raises spoke performance to an unprecedented level. Campagnolo® studied a system that would keep the spokes always in the exact identical position. This means that the spokes do not rotate, so there is no loss of tension during use and the aerodynamic penetration is not compromised.



MEGA-G3™

G3™ geometry: we have reinvented the wheel ... not just its look.

Campagnolo® has developed an assembly architecture which, compared with a traditional wheel, makes it possible to improve energy transfer, reduce the stress on the spokes on the right and increase transverse rigidity. This is achieved because in G3™ geometry the right-hand side of the rear wheel is fitted with twice as many spokes as the left.

The results of G3™ system are truly extraordinary: better transfer of the driving torque, better lateral rigidity, reduction of the stress in the rear wheel spokes. And thanks to the G3™ system that compensates for the forces acting on the 2 sides of the wheel, there are no more wheel vibrations, even for heavier people.


In 2014 G3™ becomes Mega-G3™ thanks to the oversize flange and an increase in lateral and torsional stiffness results.



Rim Dynamic Balance™

The concept is simple and elegant: balance the weight of the gasket, with an item of similar weight placed on the exact opposite side. For top aluminum models, this is obtained by a special operation on the section of the rim opposite the rim joint.

For carbon wheels the principle is the same, but applied using a different technology. When making carbon rims, the pieces of carbon fabric are aligned in such a manner that the resulting rim is always balanced.

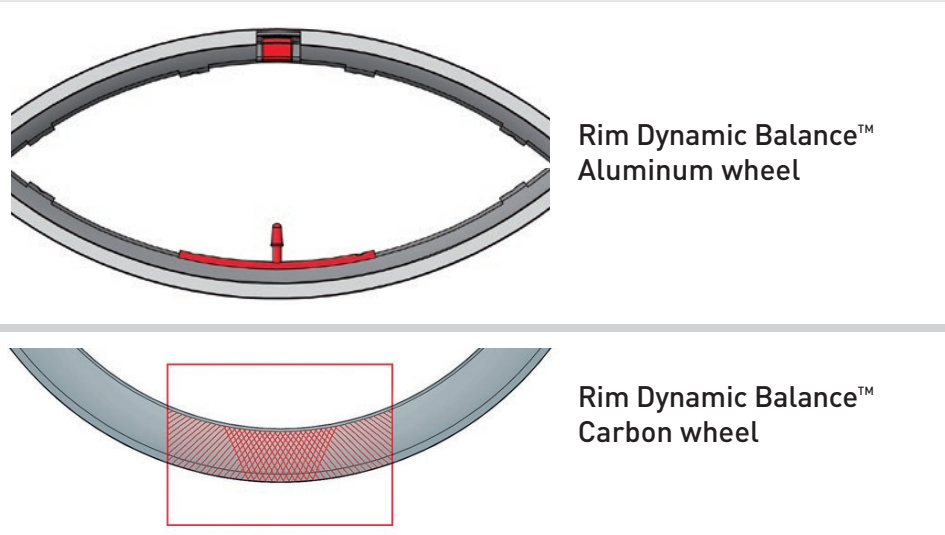

CAMPAGNOLO® QUICK RELEASE

The Campagnolo® Quick Release is more than just a wheel retention system that acts as an axle. It is highly symbolic as it is the single piece from which the long and glorious history of Campagnolo® was born. The company’s objective of continuously innovating to improve the cycling experience started with the quick release and it remains a a funtional and necessary symbol to this creed even now. Maximum performance in terms of assembly/disassebly ease, wieght and smoothness of the wheel without compromising safety in any way. The patented Campagnolo® mechanism is the one that best meets these needs. The lever is positioned centrally with respect to the axis of the hub axle, i.e. in the best position to put both ends of the axle in traction without differences in load between the sides. The axle is in the form of a cam and applies the closure traction on the axis of the quick release.


Thanks to the cam axle closure, it is simple and intuitive to understand the force to be applied for correctly closing the quick release and, even more importantly, the cam creates a mechanical impediment to the opening of the release, making it extremely safe during road use. The fork positioned symmetrically with respect to the sides of the lever and centrally with respect to the axis of the skewer, enables an even distribution of the loads and forces at each point of the skewer, thus avoiding critical breakage points and at the same perfect closure the fork of the frame and the wheel. The symmetry of the lever and the special shape of the cam make locking and releasing the wheel extremely easy, fluid, and safe. The new aerodynamic form, moreover, considerably improves the aerodynamic coefficient of the range of wheels dedicated to time trial disciplines.

				
CARBON WHEELS				
BORA™ ULTRA™ TT				•
BORA™ WTO 77				•
BORA™ WTO 60				•
BORA™ WTO 45				•
BORA™ WTO 33				•
BORA™ ULTRA™ 50				•
BORA™ ULTRA™ 35				•
BORA™ ONE™ 50				•
BORA™ ONE™ 35				•
ALUMINIUM WHEELS				
SHAMAL™ MILLE™			•	
SHAMAL™ ULTRA™			•	
ZONDA™ Disc Brake		•		
ZONDA™ Rim Brake		•		
SCIROCCO™		•		
KHAMSIN™	•			
CALIMA™	•			

Campagnolo® Identification Card

In order to leave you with absolutely no doubt as to the quality of the wheel purchased, Campagnolo® has implemented the Campagnolo® Identification Card (CIC) program. The CIC program sees a card that uniquely identifies each individual wheel and is manually compiled to guarantee that all tests have been done and that quality is guaranteed.

Only through in-depth inspection, both manual and digital, of each and every piece of every final product that leaves the premises can we be 100% sure of the exact same quality for each and every wheel that bears the Campagnolo® name.

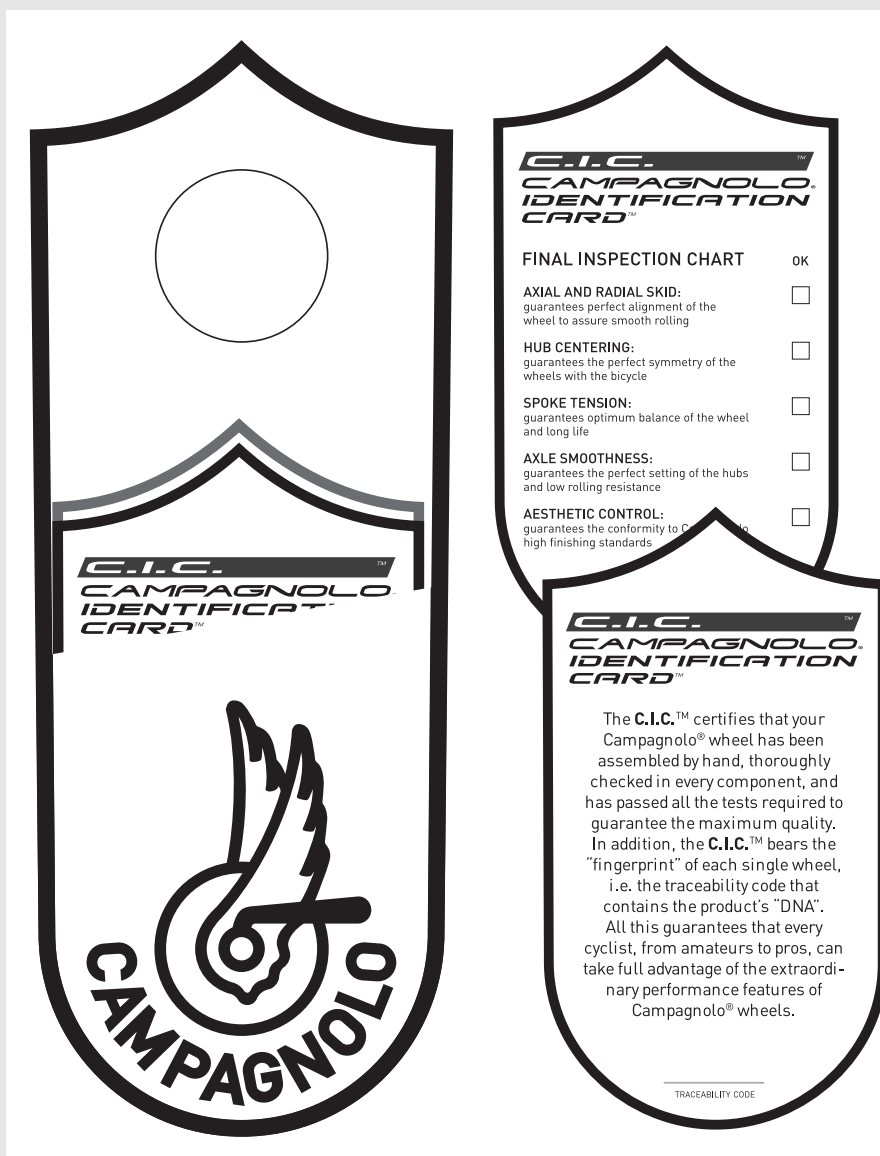

Traceability

The keyword for our products is: traceability.

If you find a little label affixed to Campagnolo® products, don't remove it. This is because it is there to provide you with a guarantee that in the event of the ascertained defectiveness of a production batch your component or wheel will be traceable. All this because, faithful to its mission, Campagnolo® demands absolute perfection and safety for its customers.



CERTILOGO[®]

Campagnolo® and Certilogo® against counterfeiting: a tangible answer that protects our clients' safety and purchases.

Top-end Campagnolo® wheels are considered by the market and by aficionados to be reference products and as such are highly desirable. They have therefore also become appetizing to counterfeiters who have cloned some of our models (especially those in carbon fiber) releasing considerable numbers onto the international markets.

The wheel is a performance product, but also a safety component. This aspect means that those who purchase a fake product, while saving money on something that clearly costs much less than the going market price, puts their personal safety at great risk. The materials and production processes that together help to achieve a safe performing product are obviously not the same.

With the aim of fighting and combating these counterfeiters, Campagnolo® is the first in the cycling sector to have put in place, thanks to the support of Certilogo®, a control system that enables our clients to authenticate the product simply and immediately.



Starting with the products in the 2015 catalogue, each pair of Campagnolo® wheels in the Bora™ and Hyperon™ lines comes with an individual ID code (the Certilogo® Code or CLG Code) on a swing tag attached to a spoke on the wheel and, from July 2018, on an sticker to the rear wheel.



The Certilogo® Code (in both numerical and QR code) allows anyone, before or after purchase to check that the product is authentic. To authenticate Campagnolo® wheels, just visit www.certilogo.com, insert the CLG Code or download the Certilogo APP.

We suggest you keep the Campagnolo® Original Wheels tag even after product authentication for possible future use and, for wheels bought from July 2018 on, leaving the sticker with the Certilogo Code on the wheel.



AERO CARBON WHEELS

The efficient wheelset must overcome resistance that comes in three specific forms: aerodynamic resistance, rolling resistance and resistance related to weight and gradient. The BORA™ WTO Project has given the Campagnolo® engineers a wealth of knowledge that has put them in a position to produce the new standard in efficient racing wheels. The new AERODYNAMIC standard for performance carbon wheels has a new name: BORA™ WTO.

The WTO wheels have been optimized to ensure that every single part of their construction offers the most efficient form and structure. Not only a highly sophisticated and extremely aerodynamic form for the carbon fiber rim but also its hub and spokes make WTO the most efficient wheel available. If you are looking for the best in terms of aerodynamics and efficiency, look no further.

BORA™ ULTRA TT	Rim Brake	131
BORA™ WTO 77	Rim Brake	132
BORA™ WTO 60	Rim Brake	133
BORA™ WTO 45	Disc Brake	134
BORA™ WTO 45	Rim Brake	135
BORA™ WTO 33	Disc Brake	136
BORA™ WTO 33	Rim Brake	137

Since its introduction, the Bora™ Ultra™ TT has accompanied cyclists of the highest caliber in winning international medals in time trials. In 2017, despite such success, the Campagnolo® road lenticular wheel was innovated even further, improving upon its main characteristics of low weight and extreme stiffness. The new Bora™ Ultra™ TT in fact weighs nearly 111 g less than the previous model and is 8% stiffer than the stiffest competitor's wheel. The Campy Tech Lab™ has focused additionally on creating a product that meets the needs of time trial bike braking systems and the results are impressive. The 2018 range saw the addition of the AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions.

RIGHT SIDE

LEFT SIDE



Tubular: 864 g



WHEEL DEVELOPED FOR THE TIME TRIAL FRAME:
extremely stiff structure further eliminates flex near the bottom bracket, namely where the rear brake is positioned on most time trial frames, thus avoiding any possible friction with the brake itself.

FULL HIGH MODULUS CARBON RIM FOR TUBULAR

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:
improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS:
the special blend increases the brake performance on both dry and wet surfaces without increasing the wear and tear on the pad or wheel.

FULL CARBON DISC IN A SPECIALLY DEVELOPED WEAVE

PROFILE:
extreme new design reduces profile on both drive and non-drive sides for an even slimmer and more aerodynamic design.

GRAPHICS FEATURING THE "WINGED WHEEL":
the legendary Campagnolo® "Winged Wheel" logo identifies Campagnolo® lenticular wheels that use the very latest carbon fiber technologies.

BEARINGS WITH CULT™ TECHNOLOGY:
the combination between the highest quality ceramic bearings and housing in special steel. CULT™ makes the wheel nine times smoother than the standard system of steel bearings.

CUP AND CONE BEARINGS:
easy bearing adjustment – reduces the possibility bearing play – precision operation – maintains performance over time.

LIGHTWEIGHT AND EXTREMELY RIGID ALUMINUM HUB CONSTRUCTION

CASSETTE:
compatible with Campagnolo® 10, 11 and 12 speed cassettes as well as Shimano Inc. 9, 10, and 11 speed cassettes.

Bora™ has become the benchmark in the carbon race wheel sector for many reasons, including reactivity, handling, lightness and reliability. Still, it is the wind, or better said, the penetration of the wind that gives the wheel its name since aerodynamics is an essential part of its performance. With the Bora™ WTO (Wind Tunnel Optimized) project, the Campy Tech Lab dedicated all of its energy on further improving aerodynamic efficiency, pushing the boundaries once again. Today, the result achieved by this task force is called the Bora™ WTO 77. Every element of this wheel was designed completely from scratch and it has become the fastest front wheel on the market.

FRONT WHEEL
Bright label



FRONT WHEEL
Bright label



2-Way Fit™: 755 g



EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26.5mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

BRAKE PADS SPECIFIC FOR CARBON FIBER

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:
aerodynamic shape from all angles.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



CULT™:

the combination of the highest quality ceramic bearings with housing in special steel. Nine times smoother than the standard system. Eliminates oxidation and maintains performance over time.

CONE/CUP BEARINGS SYSTEM:

high-performance ceramic bearings teamed with the cone/cup system ensure long-lasting performance, make adjustment easier, reduce possible play and improve smoothness.

ALUMINIUM HUB STRUCTURE, LIGHT AND EXTREMELY RIGID AND AERODYNAMIC:

optimised in the wind tunnel and designed for optimal rigidity and weight.

ALUMINIUM AXLE

reduces the weight of the wheel.

With the new Bora™ WTO 60, Campagnolo has focused on producing the most efficient wheels possible in terms of decreasing rolling resistance as the cyclist moves and maximising aerodynamic efficiency. The acronym WTO - WIND TUNNEL OPTIMIZED – calls to mind the environment that the team of Campy Tech Lab engineers worked in to meet these challenging project objectives. The new Bora™ WTO 60 wheels feature exclusive design characteristics that establish new standards in aerodynamic efficiency. Directly from the wind tunnel to the market, the pair of Bora™ WTO 60 wheels is destined to become the necessary choice every time a cyclist faces a route that requires average speeds of more than 40 km/h.


REAR WHEEL
Bright label



FRONT WHEEL
Dark label



2-Way Fit™: 1547 g



EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26.5mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

BRAKE PADS SPECIFIC FOR CARBON FIBER

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:
aerodynamic shape from all angles.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

CUP AND CONE BEARINGS:

easy bearing adjustment.

ALUMINIUM HUB STRUCTURE, LIGHT AND EXTREMELY RIGID AND AERODYNAMIC:

optimised in the wind tunnel and designed for optimal rigidity and weight.

ALUMINIUM AXLE

reduces the weight of the wheel.

OVERSIZED FLANGE:

greater torsional stiffness and greater reactivity.


Campagnolo® introduces the first aerodynamic Disc Brake wheel with a 45 mm profile, designed to appeal to a broader customer base. The design of the rim enables maximum aerodynamic penetration, and at certain angles, the wind can actually become a valuable ally to the rider. The wheel features carbon rims with a unidirectional aerodynamic finish, new aerodynamic aluminium hubs, and the ceramic USB™ cup-and-cone bearing system: every design choice has been made with a view to optimising performance. The profile of the rim, which has an internal diameter of 19 mm, corresponds perfectly with 23 mm, 25 mm and 28 mm tyres. While the key purpose of these wheels is to deliver extreme performance, safety is also guaranteed thanks to the G3™ spoking system with double spokes on the left of the front wheel, to ensure balanced and safe braking in all conditions. Available versions: dark label, Campagnolo® freewheel hub, HG or XDR.

FRONT WHEEL
Dark label

FRONT WHEEL
Dark label



2-Way Fit™: 1520 g

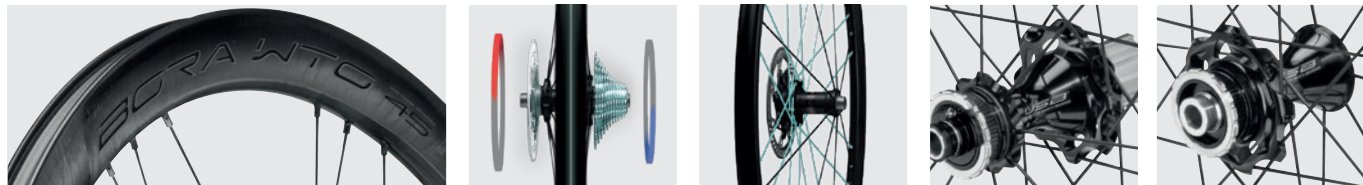

EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26 mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

RDB™ RIM DYNAMIC BALANCE:

when manufacturing carbon rims, the carbon fibre is aligned in such a manner that the resulting rim is perfectly balanced.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:

aerodynamic shape from all angles.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



USB™ ULTRA SMOOTH BEARINGS:

top quality ceramic bearings create a perfectly smooth, resistance and maintenance free rolling.

ADJUSTING LOCKING WITH MICRO-SETTING:

for precision hub adjustment.

ALUMINIUM HUB SHELL:

permits an improved torque transfer across hub during the braking phase.

NEW FLANGE ROAD DESIGN:

allows integration with the AFS rotor on the braking force, transmission side.

AVAILABLE F/W BODIES:

Campagnolo - HG - XDR

The family of carbon aero wheels is further enhanced with the 45 mm profile, designed to appeal to a broader customer base. The design of the rim enables maximum aerodynamic penetration, and at certain angles, the wind can actually become a valuable ally to the rider. Aerodynamic aluminium rims and hubs and ceramic USB™ cup-and-cone bearing system in the hubs themselves: every design choice has been made with a view to optimising performance.

The 19 mm internal diameter of the rim enables tyres of 23mm, 25mm and 28mm to be fitted. While the key purpose of these wheels is to deliver extreme performance, safety is also guaranteed by the Campagnolo® AC3™ (All Conditions Carbon Control) technology, which ensures safe, modular braking in all weather conditions. Available versions: bright and dark label, Campagnolo® FW or HG11 body.

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



2-Way Fit™: 1496 g



EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26.5mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

BRAKE PADS SPECIFIC FOR CARBON FIBER

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:

aerodynamic shape from all angles.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

CUP AND CONE BEARINGS:

easy bearing adjustment.

ALUMINIUM HUB STRUCTURE, LIGHT AND EXTREMELY RIGID AND AERODYNAMIC:

optimised in the wind tunnel and designed for optimal rigidity and weight.

ALUMINIUM AXLE

reduces the weight of the wheel.

OVERSIZED FLANGE:

greater torsional stiffness and greater reactivity.

Campagnolo introduces the first aerodynamic Disc Brake wheel with a 33 mm profile. It is a turning point in the all-rounder segment: a truly multi-purpose wheel.

The wheel features carbon rims with a unidirectional aerodynamic finish, new aerodynamic aluminium hubs, and the ceramic USB cup-and-cone bearing system: every design choice has been made with a view to optimising performance.

The profile of the rim, which has an internal diameter of 19 mm, corresponds perfectly with 23 mm, 25 mm and 28 mm tyres.


Safety is guaranteed thanks to the G3 spoking system with double spokes on the left of the front wheel, to ensure balanced and safe braking in all conditions. Available versions: dark label, Campagnolo freewheel hub, HG or XDR

FRONT WHEEL


Dark label

FRONT WHEEL

Dark label

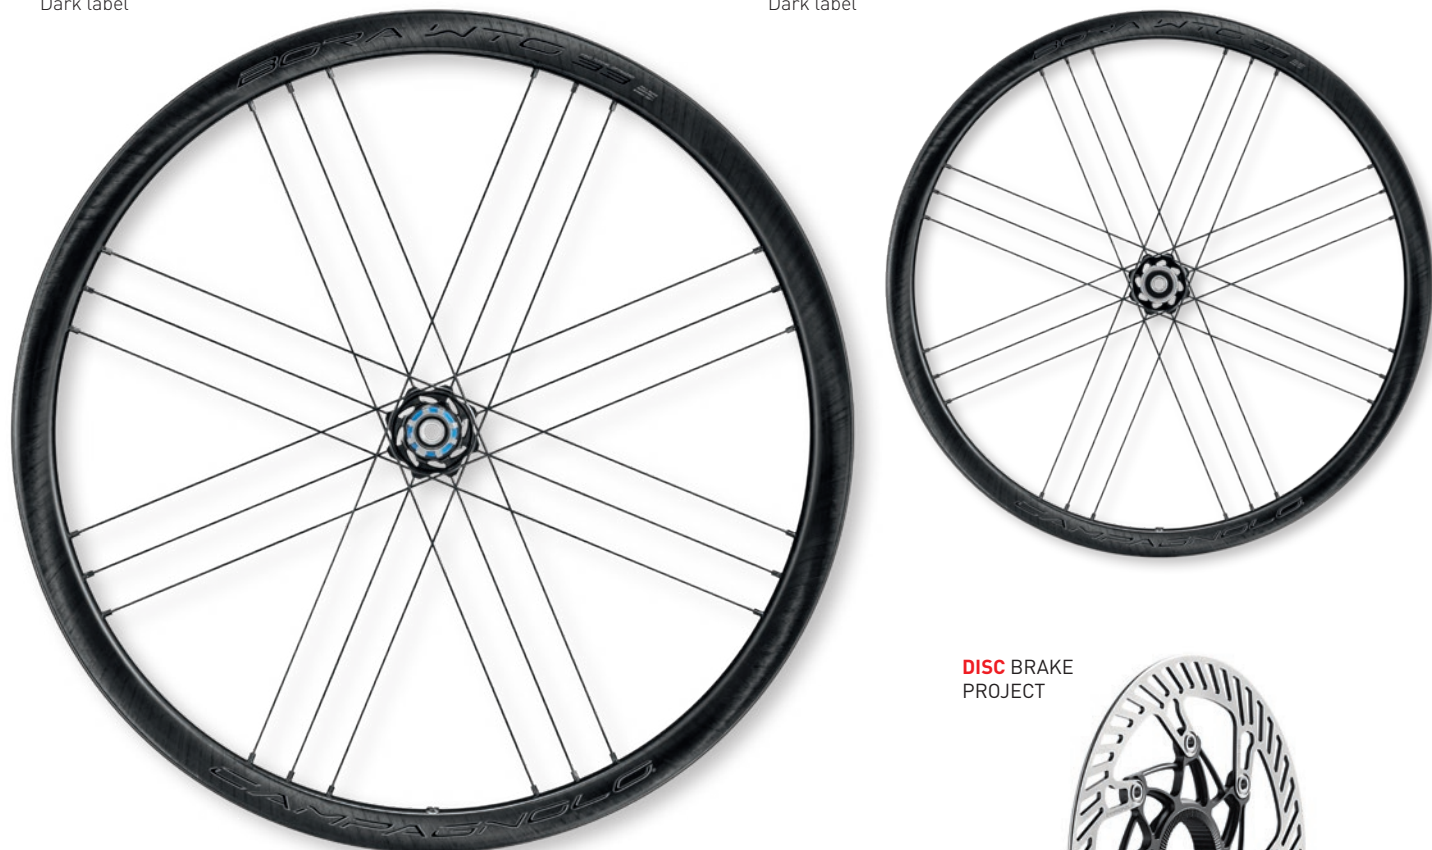

2-Way Fit™: 1450 g

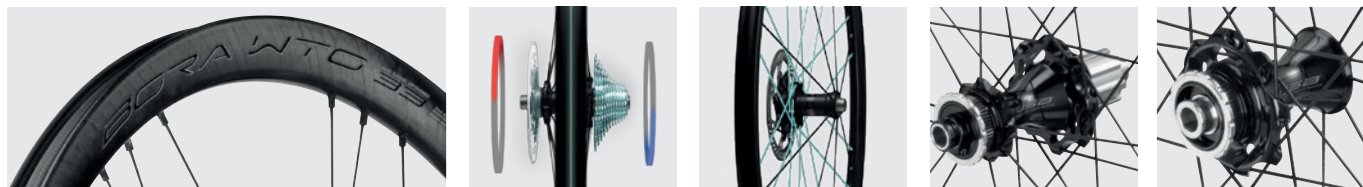

EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26 mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

RDB™ RIM DYNAMIC BALANCE:

when manufacturing carbon rims, the carbon fibre is aligned in such a manner that the resulting rim is perfectly balanced.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:

aerodynamic shape from all angles.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



USB™ ULTRA SMOOTH BEARINGS:

top quality ceramic bearings create a perfectly smooth, resistance and maintenance free rolling.

ADJUSTING LOCKING WITH MICRO-SETTING:

for precision hub adjustment.

ALUMINIUM HUB SHELL:

permits an improved torque transfer across hub during the braking phase.

NEW FLANGE ROAD DESIGN:

allows integration with the AFS rotor on the braking force, transmission side.

AVAILABLE F/W BODIES:

Campagnolo - HG - XDR

The family of carbon aero wheels is further enhanced with the 33 mm profile. It delivers multiple benefits that can be noted on different routes, from the most demanding of sprints to relaunching after a bend, while still ensuring efficiency on the flat and now also suitable for the hardest uphill finishes! It's a truly multi-purpose wheel.

The 19 mm internal diameter of the rim enables tyres of 23mm, 25mm and 28mm to be fitted.

Safety is also guaranteed by the Campagnolo AC3 (All Conditions Carbon Control) technology, which ensures safe, modular braking in all weather conditions.

Available versions: bright and dark label, Campagnolo FW or HG11 body

REAR WHEEL

Bright label

FRONT WHEEL

Dark label



2-Way Fit™: 1388 g



EXTREMELY AERODNAMIC FULL CARBON FIBER RIM, 26.5mm WIDE, COMPATIBLE WITH BOTH TUBELESS AND CLINCHER TIRES:

Wind Tunnel Optimized to be extremely efficient. Campagnolo construction to ensure reactivity and reliability.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

100% HIGH MODULOUS CARBON FIBER:

the unique, hand made construction allows Campagnolo staff to orient each and every fiber in accordance to a specific design. Every single fiber, from the inner most layers to the unidirectional fiber used for the external application are of high modulus and oriented in a way to ensure professional level ride quality. Robust, reliable and reactive the Bora wheels are also lightweight. No paint or clear coat needed as the rim's anti UV resin leaves a naturally pristine finish.

BRAKE PADS SPECIFIC FOR CARBON FIBER

WIND TUNNEL OPTIMIZED 3D SPOKE DESIGN:

aerodynamic shape from all angles.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING NIPPLES:

it allows to maintain the right tension of the spokes and does not require any maintenance.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

CUP AND CONE BEARINGS:

easy bearing adjustment.

ALUMINIUM HUB STRUCTURE, LIGHT AND EXTREMELY RIGID AND AERODYNAMIC:

optimised in the wind tunnel and designed for optimal rigidity and weight.

ALUMINIUM AXLE

reduces the weight of the wheel.

OVERSIZED FLANGE:

greater torsional stiffness and greater reactivity.



PERFORMANCE CARBON WHEELS

Since its inception the Bora™ wheelset has represented the gold standard in terms of carbon fiber racing wheels thanks to not only their extreme performance but their capability to continue offering such performance advantages kilometre after kilometre, race after race. The reactivity, handling and efficiency of the Bora™ are second to none and whether you are a professional rider or simply looking to find your own limits there is no better way to make your fast bike faster than with Bora™.

BORA™ ULTRA 50 BORA™ ULTRA 35 BORA™ ONE 50 BORA™ ONE 35	Rim Brake	140
	Rim Brake	141
	Disc Brake - Rim Brake	142 - 143
	Disc Brake - Rim Brake	144 - 145

Innovating the wheel that has become perhaps the benchmark for quality, performance and race victories at the highest level of cycling was certainly an arduous task but one that the Campy Tech Lab™ engineers met with enthusiasm. The result of their labor was the 2015 range Bora™ Ultra™ 50 which maintains the positive performance aspects of the preceding version while incorporating new solutions and technologies to build further upon its race-winning potential. The wider stance brings forth a more efficient, comfortable and sharp handling wheelset without additional weight. Add the super reactive construction, smooth rolling CULT™ bearings, aerodynamic profile it is no wonder why the Bora™ has become one of the winningest wheels in history. The 2018 range sees the addition of the new AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions.

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



Tubular: 1215 g
Clincher: 1435 g



FULL-CARBON RIM, 24.2mm WIDE, FOR TUBULARS AND CLINCHERS:
handbuilt and technologically advanced carbon fiber rim. New wider profile increases rigidity and comfort without adding weight. Wider stance improves tire/rim interface, thus improving handling and aerodynamics.

EXCLUSIVE RIM PRINTING SYSTEM:
rim painting no longer required. The weight is greatly reduced and the surface is free from imperfections.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:
improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS

RDB™ RIM DYNAMIC BALANCE

140 WHEELS

SPOKES WITH AERODYNAMIC PROFILE:
provides the maximum aerodynamic penetration. Reduces aerodynamic drag saving rider energy.

EXCLUSIVE G3™ SPOKE PATTERN:
perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING ALUMINIUM NIPPLES

CULT™:
the combination of the highest quality ceramic bearings with housing in special steel. Nine times smoother than the standard system. Eliminates oxidation and maintains performance over time.

CARBON FIBRE HUB:
provides a high degree of lateral stiffness and reduces weight to the minimum.

CUP AND CONE BEARINGS:
easy bearing adjustment.

OVERSIZED FLANGE:
greater torsional stiffness and greater reactivity.

ALUMINIUM AXLE
reduces the weight of the wheel.

140 WHEELS

The Bora™ Ultra™ 35 has been welcomed with open arms by the strongest professional riders in the World Tour since its introduction and has now become a wheel that they cannot do without. Available in both clincher and tubular versions the 35mm profile Bora™ Ultra™ 35 is perhaps the most versatile wheelset ever offered by Campagnolo®. Light enough to be considered a climber's wheel but with an aerodynamic profile that aids on the flats and is plenty rigid for the most hotly contested sprint finish. This is a wheelset that represents no compromise and excels in any condition and over any course. The 2018 range sees the addition of the new AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions.

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



Tubular: 1170 g
Clincher: 1360 g



FULL-CARBON RIM, 24.2mm WIDE, FOR TUBULARS AND CLINCHERS:
handbuilt and technologically advanced carbon fiber rim. New wider profile increases rigidity and comfort without adding weight. Wider stance improves tire/rim interface, thus improving handling and aerodynamics.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:
improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS

RDB™ RIM DYNAMIC BALANCE

SPOKES WITH AERODYNAMIC PROFILE IN STEEL:
ensuring the maximum aerodynamic penetration and, thanks to the material employed, lower weight and greater reactivity.

EXCLUSIVE G3™ SPOKE PATTERN:
perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SELF-LOCKING ALUMINIUM NIPPLES

CULT™:
the combination of the highest quality ceramic bearings and housing in special steel. Nine times smoother than the standard system.

CARBON FIBRE HUB:
provides a high degree of lateral stiffness and reduces weight to the minimum.

OVERSIZED FLANGE:
greater torsional stiffness and greater reactivity.

CUP AND CONE BEARINGS

ALUMINIUM AXLE

140 WHEELS


The Bora™ One 50 disc brake is the perfect answer for cyclists searching for deep profiles capable of offering significant aerodynamic advantages while remaining lightweight and reactive for even the steepest climbs. Its extremely sophisticated carbon fiber rim and its 24.2 mm width offers a rim/tire interface optimized for the use of both 25 and 28mm tires by creating a more aerodynamic complete unit and a more efficient and surefooted structure. The Bora™ One 50 disc brake wheelset represents the same quality, performance and reliability that made its rim-brake predecessor such an iconic wheel. While it incorporates many technologies used in the rim brake version it is a completely new project and has been specifically designed in its entirety for the unique demands that come with disc brake construction. Only a wheel whose every single part has been functionally designed around its use with disc brakes can boast complete compatibility: accept no compromises.

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



Tubular: 1348 g
Clincher: 1507 g

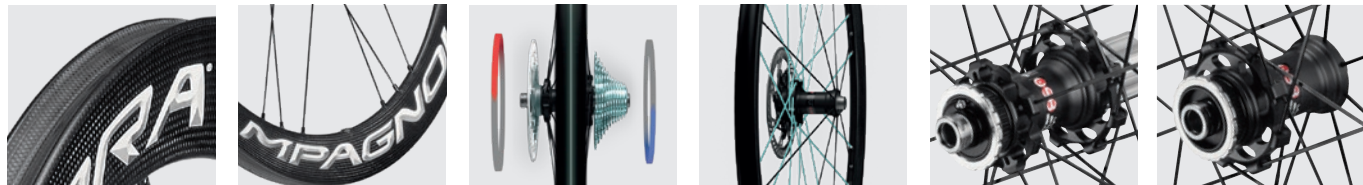

RIM DESIGN:

Full Campagnolo-carbon rim, 24.2 mm wide and 50 mm deep for both front and rear.

AVAILABLE IN CLINCHER AND TUBULAR VERSIONS:

versatile use and easy replacement of the inner tube in the event of a puncture for the clincher version. Maximum smoothness and handling performance for tubulars.

RDB™ RIM DYNAMIC BALANCE:

when manufacturing carbon rims, the carbon fibre is aligned in such a manner that the resulting rim is perfectly balanced.

ADVANCED RESIN AND CARBON FIBRE TECHNOLOGY:

the carbon fibre is held in place in the mould using a resin formula that guarantees a superior finish, durability and withstands UV rays over time.

BLACK ANODIZED SELF-LOCKING NIPPLES TO ELIMINATE SPOKE ROTATION

MODIFIED VERSION OF THE FAMOUS G3™ SPOKE PATTERN ON THE REAR WHEEL

MODIFIED VERSION OF THE FAMOUS G3™ SPOKE PATTERN ON THE FRONT WHEEL:

asymmetric forces are combatted by using the G3™ spoke design, permitting improved equal spoke tension. This ensures extremely good stiffness and reactivity, reinforcing the disc side and so increasing braking torque resistance.



USB™ ULTRA SMOOTH BEARINGS:

top quality ceramic bearings create a perfectly smooth, resistance and maintenance free rolling.

ADJUSTING LOCKING WITH MICRO-SETTING:

for precision hub adjustment.

ALUMINIUM HUB SHELL:

permits an improved torque transfer across hub during the braking phase.

NEW FLANGE ROAD DESIGN:

allows integration with the AFS rotor on the braking force, transmission side.

AVAILABLE F/W BODIES:

Campagnolo - HG - XDR

The Bora™ One™ 50 uses the same rim as its Ultra™ bretheren and thus brings along with it all of the performance that is afforded to that top end wheelset. The new wider profile brings forth a more efficient tire/rim interface, better handling, increased aerodynamics, additional comfort and optimization for use with 25/28mm tires. The 2018 range sees the addition of the new AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions. The same race-day technologies interpreted with different materials in the hub and bearings make this one wheelset capable of propelling you to the top-step of the podium at a more modest price point.

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



Tubular: 1265 g
Clincher: 1485 g



FULL-CARBON RIM, 24.2mm WIDE, FOR TUBULARS AND CLINCHERS:

handbuilt and technologically advanced carbon fiber rim. New wider profile increases rigidity and comfort without adding weight. Wider stance improves tire/rim interface, thus improving handling and aerodynamics.

EXCLUSIVE RIM PRINTING SYSTEM:

rim painting no longer required. The weight is greatly reduced and the surface is free from imperfections.

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS

RDB™ RIM DYNAMIC BALANCE

SPOKES ANTI-ROTATION SYSTEM™:

allows the spokes to maintain the best aerodynamic position.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SPOKES WITH AERODYNAMIC PROFILE:

provides the maximum aerodynamic penetration.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

ALUMINIUM HUB BODY

CONE/CUP BEARINGS SYSTEM:

high-performance ceramic bearings teamed with the cone/cup system ensure long-lasting performance, make adjustment easier, reduce possible play and improve smoothness.

ALUMINIUM AXLE:

reduces the weight of the wheel.

OVERSIZED FLANGE:

greater torsional stiffness and greater reactivity.

Campagnolo® has developed the Bora™ One Disc Brake wheelset, a completely new interpretation, extracting our rim brake version know-how and expertise and injecting new logic and technology to achieve some exciting results.

The Bora™ One is possibly the most sophisticated carbon fibre wheel currently available on the market and one of the few that have been designed specifically for disc brakes.

Extreme lightness while ensuring stiffness, resistance to impacts and perfect wheel balancing, available in Clincher and Tubular versions, in 35mm rim height, creating a wheel that is versatile for every road profile.

REAR WHEEL

Bright label


FRONT WHEEL

Dark label



DISC BRAKE
PROJECT

Tubular: 1276 g
Clincher: 1483 g

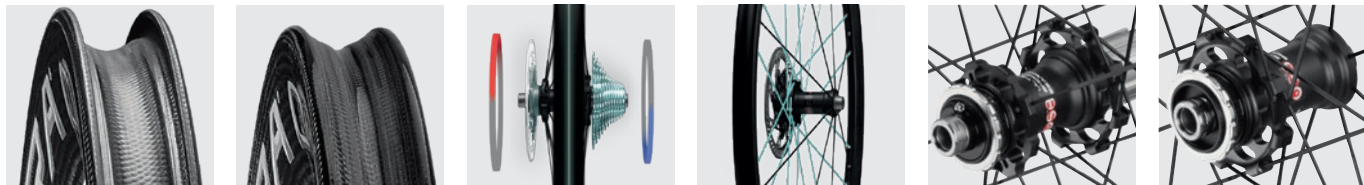

RIM DESIGN:

Full-carbon rim 23,5 mm width for the clincher version and 24,2 mm for tubular, with manual positioning of the carbon fibre textures, creating a perfect balance between weight and performance, when matched with 25 mm tyres the Bora™ One reaches new levels of comfort.

AVAILABLE IN CLINCHER AND TUBULAR VERSIONS:

versatile use and easy replacement of the inner tube in the event of a puncture for the clincher version. Maximum smoothness and handling performance for tubulars.

RDB™ RIM DYNAMIC BALANCE:

when manufacturing carbon rims, the carbon fibre is aligned to create a perfectly balanced rim.

ADVANCED RESIN AND CARBON FIBRE TECHNOLOGY:

the carbon fibre is held in place in the mould using a resin formula that guarantees a superior finish, durability and withstands UV rays over time.

BLACK ANODIZED SELF-LOCKING NIPPLES TO ELIMINATE SPOKE ROTATION

MODIFIED VERSION OF THE FAMOUS G3™ SPOKE PATTERN ON THE REAR WHEEL

MODIFIED VERSION OF THE FAMOUS G3™ SPOKE PATTERN ON THE FRONT WHEEL:

asymmetric forces are combatted by using the G3™ spoke design, permitting improved spoke tension equilibrium. This ensures extremely good stiffness and reactivity, reinforcing the disc side to increase braking torque resistance.



USB™ ULTRA SMOOTH BEARINGS:

top quality ceramic bearings create a perfectly smooth, resistance and maintenance free rolling.

ADJUSTING LOCKING WITH MICRO-SETTING:

for precision hub adjustment.

ALUMINIUM HUB SHELL:

permits an improved torque transfer across hub during the braking phase.

NEW FLANGE ROAD DESIGN:

allows integration with the AFS rotor on the braking force transmission side.

AVAILABLE F/W BODIES:

Campagnolo - HG - XDR

The same 35mm rim as found on the Ultra™ version, the Bora™ One™ 35 offers fantastic performance technologies such as the Campagnolo® quality carbon construction and a new wider and more efficient stance.

Super smooth USB™ ceramic bearings and a solid and reactive aluminum construction hub laced to aerodynamic spokes this most versatile of wheelsets is ready to take on anything you can put in front of it.

The 2018 range sees the addition of the new AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions.

REAR WHEEL


Bright label

FRONT WHEEL

Dark label



Tubular: 1215 g
Clincher: 1405 g

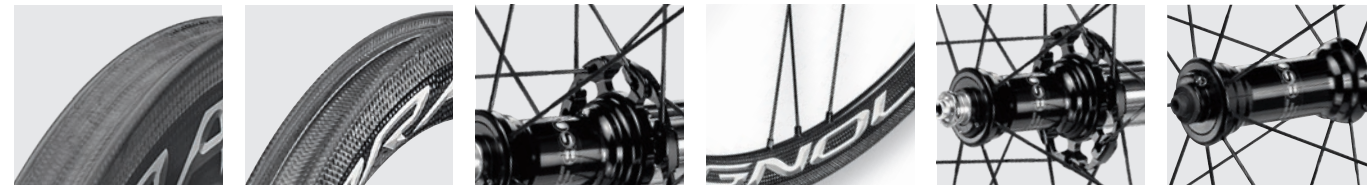

FULL-CARBON RIM, 24.2mm WIDE, FOR TUBULARS AND CLINCHERS:

handbuilt and technologically advanced carbon fiber rim. New wider profile increases rigidity and comfort without adding weight. Wider stance improves tire/rim interface, thus improving handling and aerodynamics.

EXCLUSIVE RIM PRINTING SYSTEM

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS

RDB™ RIM DYNAMIC BALANCE

SPOKES ANTI-ROTATION SYSTEM™:

allows the spokes to maintain the best aerodynamic position.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

SPOKES WITH AERODYNAMIC PROFILE:

allows for the high degree of air penetration.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

ALUMINIUM HUB BODY

CONE/CUP BEARINGS SYSTEM:

high-performance ceramic bearings teamed with the cone/cup system ensure long-lasting performance, make adjustment easier, reduce possible play and improve smoothness.

ALUMINIUM AXLE:

reduces the weight of the wheel.

OVERSIZED FLANGE:

greater torsional stiffness and greater reactivity.



ALUMINIUM WHEELS

From the iconic, range-leading Shamal™ Ultra to the Calima™, the Campagnolo® range of aluminum wheels is without equal in the cycling marketplace. Incorporating advanced technologies and sophisticated performance solutions for both rim and disk brake specific uses alike makes for a range that offers the perfect solution for any cyclist. Dynamic Balance™, G3™ spoke design, MoMag™ construction and a cornucopia of other technologies make the Campagnolo® aluminum wheelsets the obvious choice for the discerning cyclist looking for something more under his or her frame.

SHAMAL™ MILLE	Rim Brake	147
SHAMAL™ ULTRA	Disc Brake - Rim Brake	148 - 149
ZONDA™	Rim Brake - Disc Brake	150 - 151
SCIROCCO™	Rim Brake - Disc Brake	152- 153
KHAMSIN™	Rim Brake	154
CALIMA™	Rim Brake	155

SHAMAL™ MILLE

RIM BRAKE

The gold standard of performance aluminum racing wheels goes by the name of Shamal™. The stealth version of this performance wheelset goes by the name of Shamal Mille™ and the sophisticated surface treatment that gives this wheelset its sleek and elegant dark look also represents a significant performance advantage. This treatment permits surefooted and strong braking power, above and beyond that of normal aluminium rims, in both wet and dry conditions. New is a C17 rim that ensures a better rim/tire interface and thus improved performance especially when using 25 and 28mm tires. The already elegant wheelset gets a facelift in the form of black anodized nipples, to complete its understated dark look 100%. The Shamal Mille™ is sure to turn heads of both the competition on race day as well as those next to you at the stoplight.

REAR WHEEL

FRONT WHEEL



Clincher: 1459 g



PLASMA ELECTROLYTIC OXIDATION:
it offers elegant finish and enhances braking power and modularity.

TOROIDAL MILLING

SPIRAL GROOVE ON THE BRAKING TRACK:
reduces braking distance while maintaining silent braking.

DIFFERENTIATED RIM HEIGHT FRONT (24 - 27 mm) AND REAR (27 - 30 mm)

DYNAMIC BALANCE

MOMAG™:
allows the external profile of the rim to be free of holes.

AERODYNAMIC SPOKES IN ALUMINUM:
maximum air penetration, less weight and greater reactivity.

DIFFERENTIATED SPOKES:
16 radial spokes for the front, 21 spokes for the rear, doubled on the right and exclusive Mega-G3™ spokes to reduce vibration, increase stiffness and transmission of power to the wheel.

BLACK NIPPLES:
black Oxidation Finishing self-locking aluminum nipples outside the rim. Allows easy maintenance and less truing over the wheel lifetime.

SPOKES ANTI-ROTATION SYSTEM:
it keeps the spokes in a position of maximum aerodynamics.

CERAMIC USB BEARINGS WITH DIFFERENTIATED DIAMETERS:
28 mm for the front, 30 mm for the rear. Less friction, less weight, greater smoothness and the same performance over time.

HUB BODY IN CARBON:
high lateral stiffness, reducing weight to a minimum.

AXLE IN ALUMINUM:
low weight, high stiffness.

OVERSIZED FLANGE:
it increases torsional stiffness, increasing its reactivity at every change in the cyclist's pace.

The Shamal™ wheel is already an industry reference point for high end aluminium wheelsets. Now for 2018 Campagnolo® have taken their know how and expertise to introduce the new disc brake version. Campagnolo® engineers have worked tirelessly to create a wheel that will come to represent the same standard for quality and performance as its rim-brake counterpart

REAR WHEEL
Bright label

FRONT WHEEL
Dark label



DISC BRAKE
PROJECT

2-Way Fit™: 1592 g



2-WAY FIT™ VERSION:

permits the cyclist to use the same rim to choose the best of both worlds – traditional clincher tyres or innovative tubeless.

22 mm RIM WIDTH:

creates a perfect balance between weight and performance, matching 25mm tyres to reach high levels of comfort.

DIFFERENTIATED FRONT RIM HEIGHT:

the 27 mm profile on the front rim allows for maximum stiffness at the nipple contact point and the toroidal milling achieves a 25 mm height in those areas where the rim does not require extra material, saving weight and increasing the handling of the wheel.

DIFFERENTIATED REAR RIM HEIGHT:

the 30mm profile on the rear rim allows the maximum stiffness at the nipple contact point and the toroidal milling achieves the 27 mm height in those areas where the rim does not require extra material, saving weight and increasing the handling of the wheel.

FRONT WHEEL SPOKES:

14 aluminum aero spokes are used on the braking side, and 7 aluminum aero spokes section 2/1,6/2 mm on the drive side.

REAR WHEEL SPOKES:

7 aluminum aero spokes are used on the braking side, and 14 aluminum aero spokes on the drive side. This ensures aerodynamics and reactivity, whilst strengthening the disc side to increase braking torque resistance.

BLACK ANODIZED SELF-LOCKING NIPPLES:
combats possible spoke rotation during wheels lifecycle.

HH 12/100 FRONT AND HH 12/142 REAR THRU AXLES:

uses a single specification in order to achieve "Campagnolo performance" also in the transfer of forces to the frame. QR and 12/135 axles are offered as accessories.



CERAMIC USB™ ULTRA SMOOTH BEARINGS:

Top quality ceramic bearings create a perfectly smooth, resistance and maintenance free rolling.

ADJUSTING LOCKING WITH MICRO-SETTING:
for precision hub adjustment.

REAR ALUMINUM BODY WITH MEGA-G3™ SYSTEM:

ensures extremely efficient aerodynamics and reactivity, with reinforcing on the braking side to promote torque resistance under braking phase.

FRONT ALLOY HUB FLANGES AND CARBON FIBRE SPACER:

helps to create an extremely light and strong front wheel.

NEW FLANGE ROAD DESIGN:

for greater integration with the AFS rotor, enhancing the braking forces.

The SHAMAL™ ULTRA™ C17 represents the same fantastic performance that has made it THE go to aluminum race wheel for the better part of two decades while adding even more versatility and performance. The wider profile meets the C17 standard and is perfect for use with the increasingly popular 25/28mm tire sizes. This rim/tire interface proves to be more aerodynamic when compared to the same size tires mated to a C15 rim. The C17 also allows for a more surefooted grip in addition to increased comfort while increasing rigidity and thus reactivity at the same time thanks to its wider stance and optimized material usage.

REAR WHEEL

FRONT WHEEL



2-Way Fit™: 1475 g
Clincher: 1449 g



TOROIDAL MILLING:

reduces the peripheral weight of the rim – makes the wheel extremely reactive.

DYNAMIC BALANCE™

2-WAY FIT™ PROFILE:

allows you to use either the classic clincher or the innovative tubeless tire.

ULTRA-FIT™:

easy tire mounting – maximum safety – less friction – less energy dispersion – improved performance.

MOMAG™:

allows the external profile of the rim to be free of holes.

DIFFERENTIATED RIM HEIGHT
FRONT (24 - 27 mm) AND REAR (27 - 30 mm)

SPOKES ANTI-ROTATION SYSTEM™:

keeps the spokes in the position of maximum aerodynamic penetration.

SELF-LOCKING NIPPLES:

allow the ideal spoke tension to be maintained at length, eliminating friction on the rim. All this translates into constant high performance throughout the life of the product.

EXCLUSIVE MEGA-G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. Mega-G3™ eliminates vibrations even with "heavy" cyclists.

AERO SPOKES IN ALUMINIUM:

maximum aerodynamic penetration - lower weight and greater reactivity.



USB™ CERAMIC BALL BEARINGS:

reduces friction, provides greater smoothness, and maintains performance over time.

CARBON FIBRE HUB BODY:

high degree of lateral stiffness – reduces the weight to the minimum.

ALUMINIUM AXLE

low weight, high stiffness.

OVERSIZED FLANGE:

increases the torsional stiffness, increasing reactivity at each change of pace of the cyclist.


DIFFERENTIATED HUB DIAMETER FRONT AND REAR:

optimized for structural integrity and performance. Small front hub aids in aerodynamic efficiency.

The very first Campagnolo® branded wheelset developed specifically for disc brake equipped road bikes comes at a time where the market has plenty of solutions for road disc wheelsets but lacks many solutions that offer a level of performance, reliability, safety and integrity that has been associated with Campagnolo® wheels for traditional rim brakes. The Zonda™ disk brake wheelset is not only more reactive when compared to the rim brake version but it is also 25 grams lighter than its closest competitor. Adding more tech and more componentry to a wheel while increasing its performance, lowering its weight and ensuring that same Campagnolo® reliability cyclists have come to expect make a wheelset that should be at the top of any disc brake riding athlete in the market for a serious upgrade. It is available with QR and HH12 with 135 and 142 OLD.

REAR WHEEL

FRONT WHEEL

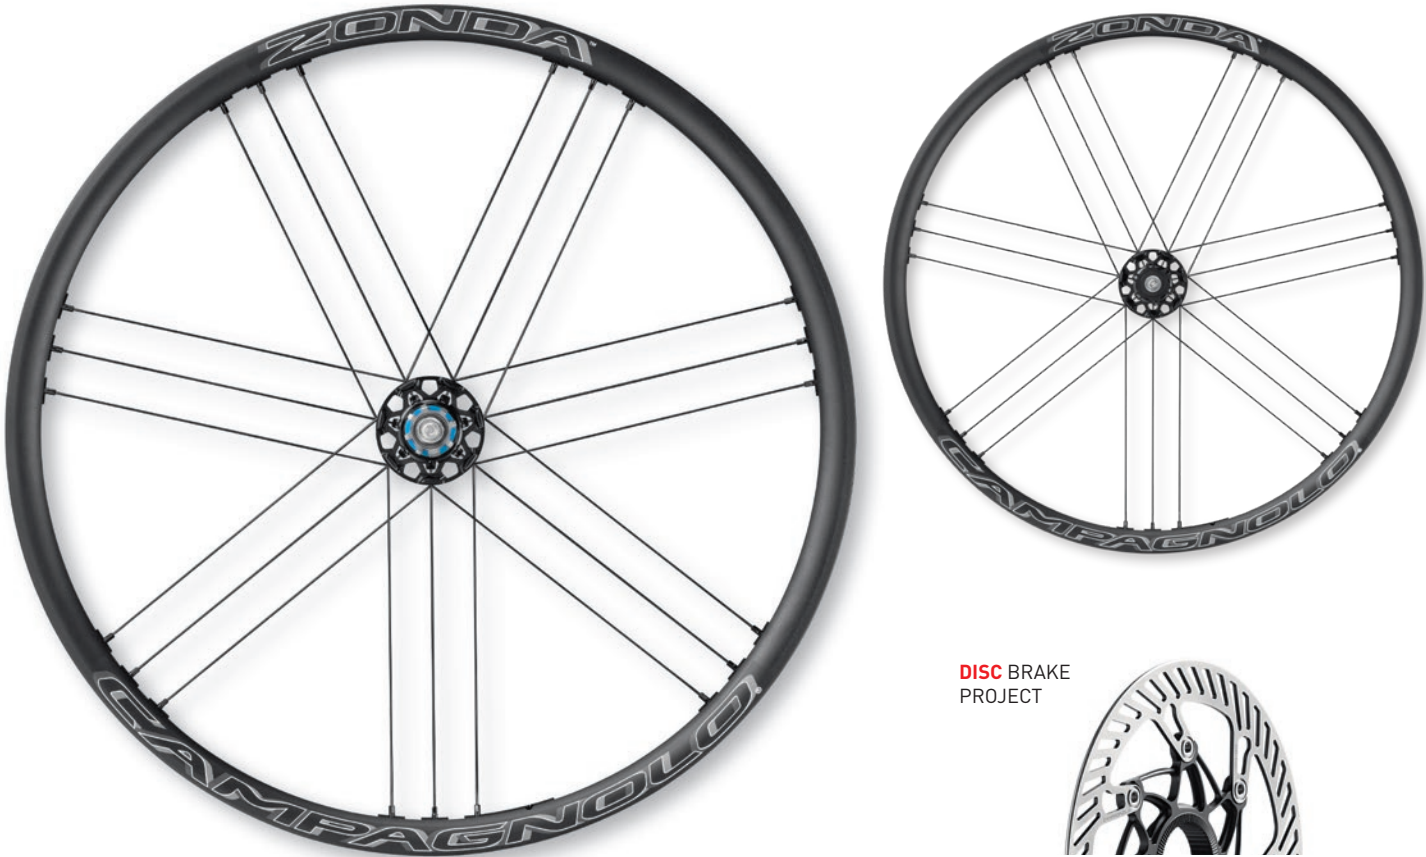

Clincher: 1675 g



NEW ASYMMETRIC RIMS PROFILE (26 – 28 mm)

MILLED RIM:
this machining makes possible to reduce the peripheral weight of the rim and makes the wheel extremely reactive.

RDB™ - RIM DYNAMIC BALANCE:
the concept is simple and elegant: balance the weight of the gasket, with an item of similar weight placed on the exact opposite side.

MOMAG™:
allows the external profile of the rim to be free of holes to benefit of both stiffness and weight.

SPOKES:
G3™ technology applied also to the front wheel to better perform at high braking power.

FRONT WHEEL SPOKES:
14 spokes in stainless steel section diameter 2/1,6/2 mm (left side - braking side)
7 spokes in stainless steel section diameter 2/1,6/2 mm (right side).

REAR WHEEL SPOKES:
7 spokes in stainless steel section diameter 2/1,6/2 mm (left side - braking side)
14 spokes in stainless steel section diameter 2/1,6/2 mm (right side - cassette side).

NIPPLES:
black anodized self-locking nipples outside the rim allows for easy maintenance.

CUP AND CONE BEARINGS:
easy bearing adjustment that reduces possible bearing play, maintaining performances over time and keeping the optimal contact angle between ball and track.

ADJUSTING LOCKING WITH MICRO-SETTING TECH:
for an accurate adjustment of the hub that prevents the creation of any play.

TWO DIFFERENT INTERFACES WITH THE ROTOR: 6 BOLTS AND AFS™:
for allowing the full compatibility with every rotor available in the market.

21 SPOKES IN STAINLESS STEEL WITH MEGA-G3™ SYSTEM:
ensures extremely good stiffness and reactivity, reinforcement on braking side at the front and cassette side at the rear. It gives a very race design to the wheelset.

The universally lauded Zonda™ get an update for 2017 range and the best-selling Campagnolo® wheelset incorporated a C17 class rim. The highly respected Zonda™ with its new 22,5 mm wide rim accepts larger clincher tires making for increased performance, comfort and a more efficient tire/rim interface. A new rim coupled with the same technologies that put the Zonda™ in a league apart from the rest of the wheels in its segment make this wheelset one that punches far above its weight. And while speaking of weight, the Zonda™ offers this added performance and wider profile while reducing its overall weight more than 10 grams.

REAR WHEEL

FRONT WHEEL



Clincher: 1540 g



MOMAG™:
allows the external profile of the rim to be free of holes – increases structural resistance – makes rim tape unnecessary and reduces the weight of the wheel.

MILLED RIM

DIFFERENTIATED RIM HEIGHT FRONT (24 - 27 mm) AND REAR (27 - 30 mm)

DYNAMIC BALANCE™

SPOKES ANTI-ROTATION SYSTEM
keeps the spokes in the position of maximum aerodynamic penetration.

EXCLUSIVE MEGA-G3™ SPOKE PATTERN:
perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. Mega-G3™ eliminates vibrations even with “heavy” cyclists.

SPOKES WITH AERODYNAMIC PROFILE:
Front: 16 spoke variable profile Aero radials in stainless steel.
Rear: 21 spoke variable profile Aero in stainless steel with doubling on the cassette side.

SELF-LOCKING NIPPLES:
allow the ideal spoke tension to be maintained at length, eliminating friction on the rim. All this translates into constant high performance throughout the life of the product.

REAR HUB WITH MEGA-G3™ OVERSIZED FLANGE:
increases the torsional stiffness, increasing reactivity at each change of pace of the cyclist.

ALUMINIUM HUB BODY:
provides a high degree of lateral stiffness.

ALUMINIUM AXLE:
low weight, high stiffness.

DIFFERENTIATED HUB DIAMETER FRONT AND REAR:
optimized for structural integrity and performance. Small front hub aids in aerodynamic efficiency.

NEW ADJUSTING LOCK RING WITH MICRO-SETTING:
for an accurate adjustment of the hub that prevents the creation of play.

33 mm is the entry point for the mid-profile rim segment. This is when we start to talk about aerodynamics, stability at high speeds and absolute steering precision. The Scirocco™ Disc Brake is a sturdy, precise aluminium wheel with sophisticated solutions, like straight-head spokes and the 2-Way Fit™ Ready profile, assembled in a highly competitive race-ready package. This wheel has character and can quite easily take on the role of the cyclist's only wheel or the perfect training partner, offering an aerodynamic advantage and effortless rideability. It is ideal for aerodynamic race bikes and it responds perfectly to the needs of both triathletes and roulers who looking to perform well on climbs. Every watt will enhance performance, every turn will be carried out with precision. Additionally, the very comfortable features of the 19mm internal width will shine in the Endurance segment.

REAR WHEEL

FRONT WHEEL



DISC BRAKE
PROJECT

2-Way Fit™ Ready: 1739 g



33 mm RIM HEIGHT:

extremely versatile rim profile. High enough for added aerodynamic efficiency that remains stable even in crosswinds. Low enough to ensure lightweight construction.

2-WAY FIT READY PROFILE WITH 19 mm INNER WIDTH:

ensures compatibility with the larger tire widths and unique design facilitates assembly. Allows use of either clincher or tubeless ready tyres according to the indications on the page related to the "2-Way Fit Ready" technology.

NIPPLE SUPPORT TAB INSIDE THE RIM:

unique solution reduces weight in addition to optimizing the distribution of tension to ensure a longer wheel lifetime.

WELDED RIM:

increase in lateral rigidity.

SPOKES:

G3™ technology applied also to the front wheel to better perform at high braking power.

FRONT WHEEL SPOKES:

14 spokes in stainless steel (left side - braking side)
7 spokes in stainless steel (right side).

REAR WHEEL SPOKES:

7 spokes in stainless steel (left side - braking side)
14 spokes in stainless steel (right side - cassette side).

NIPPLES:

black anodized self-locking nipples outside the rim allows for easy maintenance.

MEGA-G3 OVERSIZE FLANGE ON THE REAR WHEEL (FW BODY SIDE):

increases the torsional rigidity, increased reactivity.

MEGA-G3 OVERSIZE FLANGE ON THE FRONT WHEEL (DISC SIDE):

increases torsional rigidity and ensures greater rideability.

AVAILABLE WITH DIFFERENT AXLES THANKS TO THE ADAPTORS:

possible assembly on HH12 (100 mm at the front, 142 or 135 mm at the rear) or HH15 at the front and QR frames by simply adding or removing the adaptors.

ALUMINIUM AXLE:

confers lightweight construction to wheel.

ADJUSTING LOCKING WITH MICRO-SETTING TECH:

for an accurate adjustment of the hub that prevents the creation of any play.


With the easily recognizable 35mm profile height, the Scirocco™ is a versatile wheelset solution that offers strengths in every field. From aerodynamics and handling, weight and stiffness. It is predictable, reactive and light. The Scirocco™ is an all round wheelset aimed at passionate cyclists and professionals alike. The 35 mm profile is perhaps the perfect wheel to take on any challenge that the road or race presents.

REAR WHEEL

FRONT WHEEL



Clincher: 1755 g

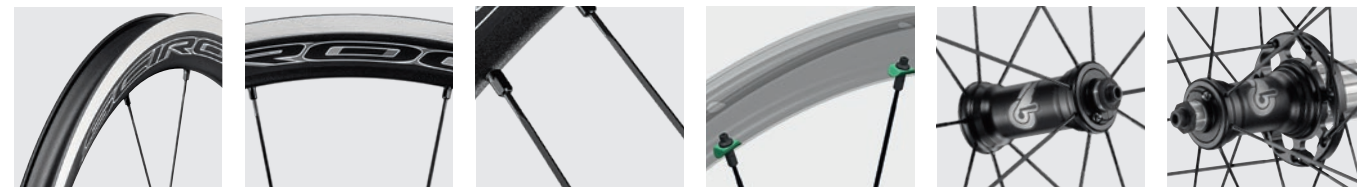

35 mm AERODYNAMIC PROFILE IN A MID-END ALUMINUM RIM:

aerodynamics in a mid-end aluminum rim. Advanced aero efficiency while being extremely easy to handle even in cross winds.

DYNAMIC BALANCE™:

every point of the rim is counter-balanced by an equal weight on the opposite side. Maximum stability of the wheel even at high speeds.

WELDED RIM:

to increase stiffness and braking surface precision allowing a smoother progressive braking.

AERODYNAMIC PROFILE:

radial spokes in stainless steel. 16 spoke radial configuration on the front wheel, 21 spokes with double spoke pattern on the cassette side.

EXCLUSIVE MEGA-G3™ SPOKE PATTERN:

the Mega-G3™ creates a perfect spoke tension balance on both sides of the wheel. This helps to reduce spoke stress, increases transversal rigidity and as a consequence improved power to wheel transmission.

INTERNAL RIM NIPPLE SUPPORT TABS:

as used in high end carbon wheels. The support tabs are used to guarantee a longer life of the wheel by distributing tension more efficiently.

ALUMINUM HUB AND AXLE:

saves weight and increases lateral stiffness.

MEGA-G3™ OVERSIZE FLANGE ON THE REAR WHEEL (CASSETTE SIDE):

this is used to increase torsional stiffness, creating greater reactivity with each change in the pace.

HI-END FREE HUB BODY:

the Scirocco™ hubs uses the same construction components normally reserved for high end hubs. Available in two options: Campagnolo (aluminum) and HG11 (in aluminum with the Plasma Electrolytic Oxidation treatment) low weight, high stiffness.

The new design Khamsin™ model maintains its positioning as an entry wheel in the Campagnolo range, but only because of its incredible price. Its cutting-edge features, like the Mega-G3™ spoke pattern, oversize flange, Spoke Dynamic Balance™ technology and its C17 class rim in fact make this wheel superior to its entry level competitors. In their redesign of the new Khamsin, the Campy Tech Lab™ engineers have raised the quality bar by developing a C17 rear rim that, teamed with the Mega-G3™, delivers better results for both lateral and torsional stiffness and also response, while maintaining excellent steering at the front. Khamsin wheels therefore make Campagnolo® quality and performance training accessible to all cyclists.

REAR WHEEL

FRONT WHEEL



Clincher: 1806 g



DIFFERENTIATED RIM HEIGHT:

24 mm at the front to provide optimal handling; 27,5 mm at the rear for transmitting all your power to the wheel.

ASYMMETRIC RIM PROFILE:

asymmetrical rear rim profile allows for better balancing of spoke tensions between drive and non drive side, giving better symmetry to an asymmetric component. Increased efficiency and reactivity are sure to be noted.

17 mm INNER RIM WIDTH:

perfect compatibility with 25 mm tyres.

EXCLUSIVE G3™ SPOKE PATTERN:

perfect balance of spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel. G3™ eliminates vibrations even with "heavy" cyclists.

STRAIGHT-HEAD SPOKE (LEFT SIDE):

maximum stiffness of the wheel – maintains the spoke tension and long-lasting performance.

RADIAL SPOKES AT THE FRONT:

maximum rigidity thanks to perfect symmetry. More efficient spoke tension and longer lasting performance.

OVERSIZED FLANGE:

increases the torsional stiffness, increasing reactivity at each change of pace of the cyclist.

ALUMINIUM AXLE:

low weight, high stiffness.

SEALED BEARINGS:

maintains performance over time – longer bearing life.

A wheel that is requested by passionate cycle lovers to seasoned professionals alike. Light enough to tackle the steepest of climbs yet strong and flexible enough to affront the roughest of roads. The Calima™ wheelset offers to all cyclists the possibility to experience the renowned quality and technology of Campagnolo®.

REAR WHEEL

FRONT WHEEL



Clincher: 1826 g



24mm PROFILE:

a 24mm symmetrical low profile rim that creates a front wheel that is precise in directional changes and a rear wheel that is reactive to power transfer and changes in pace.

C17 CLASS FOR CLINCHER TYRES:

to permit the fitting of a wider tyre (25 mm minimum) allowing for easier tyre fitting.

GLUED RIM:

glued rim for increased precision on the braking surface allowing smoother progressive braking.

MACHINED PRECISE SPOKE SEAT:

permitting a longer spoke life.

ED (ELECTRODEPOSITION) BLACK SPOKES:

Front: 18 radial spokes in steel
Rear: 27 spokes in steel with double spoke count on the cassette side.

EXCLUSIVE G3™ SPOKE PATTERN:

creating a perfect balance of the spoke tension on both sides of the wheel. Reduces stress, increases transversal rigidity and the transmission of power to the wheel.

ALUMINIUM HUBS:

for increased lateral stiffness.

G3™ FLANGE ON THE REAR WHEEL:

to increase torsional stiffness and greater reactivity with each change of pace.

STEEL AXLE:

increases wheel stiffness permitting a wheel geometry that allows the use of different free hub bodies. Hi-end free hub body using the same construction components normally reserved for high end hubs. Available in two options: Campagnolo (aluminum) and HG11 (steel).

TRIATHLON TIME TRIAL

Running against time and winning.

When the margin of victory is measured in millimeters or milliseconds the smallest things count and perfection is the ultimate goal. To give you all of this Campagnolo® has designed and developed, in collaboration with the best Triathlon and Time Trial athletes, the range dedicated to these disciplines. With new technology such as bar-end brake levers that allow you to change gears you can see that Campagnolo® is making sure that technical advantages are within your grasp in your quest for victory atop your triathlon or TT bike. The starting gun has sounded. With Campagnolo® Triathlon/TT equipment you will reach the finish line faster and fresher than you ever imagined.



SUPER RECORD™ EPS™ CONTROLS

Triathlon and Time Trial cyclists, just like any other athlete, must have perfect control, regardless of the position they assume. The Bar-End Super Record™ EPS™ controls and Super Record™ EPS™ brake levers allow the cyclist to shift no matter the position of his or her hands. The Super Record™ EPS™ TT controls have been designed not only to offer easy access, but also to enable the cyclist to maintain the best posture from an aerodynamic point of view while still maintaining maximum control. In other words, a simple click in any position brings you closer to victory with Campagnolo®.



SUPER RECORD™ EPS™
98 g/Pair, cables included

SUPER RECORD™ EPS™
110 g/Pair, cables included

EPS™ BAR-END CONTROLS



1. BACK-TO-ZERO POSITION:
allows the lever to return always to its initial position. Reduces effort required to shift and maintains the lever in the most aerodynamic position.

MULTI-DOME TECH™:
the 5-dome technology perfected by Campy Tech Lab™ together with Campagnolo athletes has made it possible to strike the perfect balance between operating force and tactile shift feedback. It also eliminates the possibility of unintentionally shifting the rear or front derailleur.

2. MULTI-SHIFTING SYSTEM™:
lets the rider shift up or down by up to 11 sprockets in a single action.

3. MODE BUTTON:
the "Mode" buttons allow the user to check battery charge, make fine adjustments to the rear or front derailleur - even in the middle of a race [with the "ride setting" procedure], and set the zero position of the rear and front derailleur ["zero setting" procedure].

100% WATER-PROOF:
all control components are built to operate in any weather conditions in compliance with the IP67 standard.

EPS™ BRAKE CONTROLS



1. AERODYNAMIC PROFILE:
maximum aerodynamic coefficient.

2. QUICK-RELEASE SYSTEM:
it makes it easier to install and remove the wheel and allows, even during the race, to open the distance between the rim and the brake pads.

3. ERGONOMIC PROFILE FOR THE LEVERS:
maximum safety and adjustable braking system.
- Carbon fibre (Record™ EPS™)

ONE LEVER-ONE ACTION:
each lever of the control set has its own distinct function. This means absolute certainty of using the right control in all conditions (winter temperatures and gloves, poor road conditions etc.), eliminating the risk of error.

V4 DTI™ EPS™ BAR-END INTERFACE

Designed for Triathlon and Time Trial bicycles, the EPS™ interface has two separate cable inputs for use both with Bar End levers and brake lever controls. This ultra-light component may be installed on either the brake cables or the handlebar mount. Super Record™ EPS™ 12x2 Speed groupset uses the V4 interface.



45 g, cables included

DTI™ EPS™ V3 INTERFACE



1. DIALOGUE WITH "MYCAMPY" APP:
Wireless system to communicate with "MyCampy" App by PC / Notebook / Tablet / Smartphone (BTLE), which allows the EPS groupset holder to personalize its own settings.

2. EASY ACCESS TO THE CHARGING PORT:
recharging port positioned on the upper part and covered by a rubber cover linked to the interface.

ANALOGUE-DIGITAL SIGNAL CONVERSION:
transforms the analogue signals received from the controls into the digital signals transmitted to the Power Unit.

1. DIALOGUE WITH "MYCAMPY" APP:
Wireless system to communicate with "MyCampy" App by PC / Notebook / Tablet / Smartphone (BTLE), which allows the EPS groupset holder to personalize its own settings.

2. EASY ACCESS TO THE CHARGING PORT:
recharging port positioned on the upper part and covered by a rubber cover linked to the interface.

ANALOGUE-DIGITAL SIGNAL CONVERSION:
transforms the analogue signals received from the controls into the digital signals transmitted to the Power Unit.

GREEN : 100% - 60%
FLASHING GREEN : 60% - 40%
YELLOW : 40% - 20%
RED : 20% - 6%
FLASHING RED : 6% - 0%

Since its introduction, the Bora™ Ultra™ TT has accompanied cyclists of the highest caliber in winning international medals in time trials. In 2017, despite such success, the Campagnolo® road lenticular wheel was innovated even further, improving upon its main characteristics of low weight and extreme stiffness. The new Bora™ Ultra™ TT in fact weighs nearly 111 g less than the previous model and is 8% stiffer than the stiffest competitor's wheel. The Campy Tech Lab™ has focused additionally on creating a product that meets the needs of time trial bike braking systems and the results are impressive. The 2018 range saw the addition of the AC3™ (All Conditions Carbon Control) Technology braking surface, which brings braking performance in wet conditions closer to that found on dry conditions.

RIGHT SIDE

LEFT SIDE



Tubular: 864 g



WHEEL DEVELOPED FOR THE TIME TRIAL FRAME:

extremely stiff structure further eliminates flex near the bottom bracket, namely where the rear brake is positioned on most time trial frames, thus avoiding any possible friction with the brake itself.

FULL HIGH MODULUS CARBON RIM FOR TUBULAR

AC3™ (ALL CONDITIONS CARBON CONTROL) BRAKING SURFACE TECHNOLOGY:

improves the braking performances on dry and, above all, on wet conditions.

BRAKE PADS MADE ESPECIALLY FOR CARBON WHEELS:

the special blend increases the brake performance on both dry and wet surfaces without increasing the wear and tear on the pad or wheel.

FULL CARBON DISC IN A SPECIALLY DEVELOPED WEAVE

PROFILE:

extreme new design reduces profile on both drive and non-drive sides for an even slimmer and more aerodynamic design.

GRAPHICS FEATURING THE "WINGED WHEEL":

the legendary Campagnolo® "Winged Wheel" logo identifies Campagnolo® lenticular wheels that use the very latest carbon fiber technologies.



BEARINGS WITH CULT™ TECHNOLOGY:

the combination between the highest quality ceramic bearings and housing in special steel. CULT™ makes the wheel nine times smoother than the standard system of steel bearings.

CUP AND CONE BEARINGS:

easy bearing adjustment – reduces the possibility bearing play – precision operation – maintains performance over time.

LIGHTWEIGHT AND EXTREMELY RIGID ALUMINUM HUB CONSTRUCTION

CASSETTE:

compatible with Campagnolo® 10, 11 and 12 speed cassettes as well as Shimano Inc. 9, 10, and 11 speed cassettes.

SUGGESTED WHEELS

Time trials and triathlons are always a combination of battles against the clock and the performance of your adversaries. However, no two races are ever the same. Courses are flat, undulating or hilly. Conditions can be windy and treacherous or calm and easy. No matter the conditions, course or situation at hand there is a perfect Campagnolo® wheelset for any given day or competition. Whether you are taking on a triathlon or time trial you will find the perfect performance ally in Campagnolo® wheels.

BORA™ WTO 77



BORA™ WTO 60




BORA™ WTO 45 Disc Brake



BORA™ WTO 45 Rim Brake



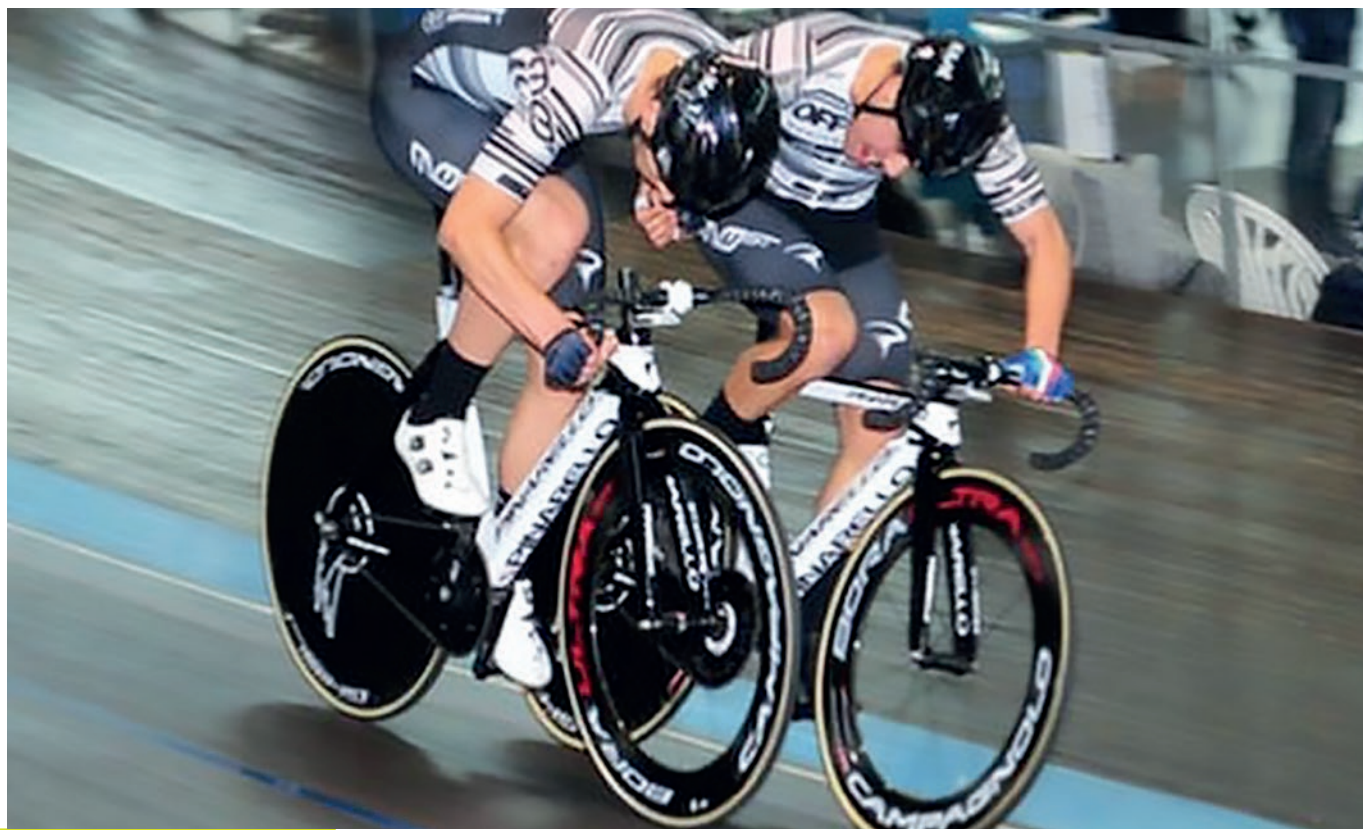

PISTA

From the starting gun a track racer exerts an extreme amount of force and the physical test increases exponentially as the race continues. No matter what the event, the track athlete is obligated to run a perfect race. Nowhere to hide. No place for even the slightest error. Track racing demands an incredible amount of expertise and extreme attention to detail in order for an athlete to be successful. It is with this same spirit that Campagnolo® develops its products; attention to detail, search for perfection and desire to continuously improve.




Campagnolo® is quite proud of its glorious track record with the Ghibli™ disc wheel, the very first tenso-structure wheel ever introduced in the cycling world. Despite the fact that the Ghibli™ was still very competitive with newer models, the R&D department at Campagnolo® sought to take lessons from this iconic wheel and build upon them in order to produce the next generation of extreme performance. Incorporation of carbon fiber throughout in addition to completely new construction techniques give the new wheelset an ultralight build while not sacrificing its performance attributes.

FRONT WHEEL

REAR WHEEL



Tubular: 1625 g (pair)

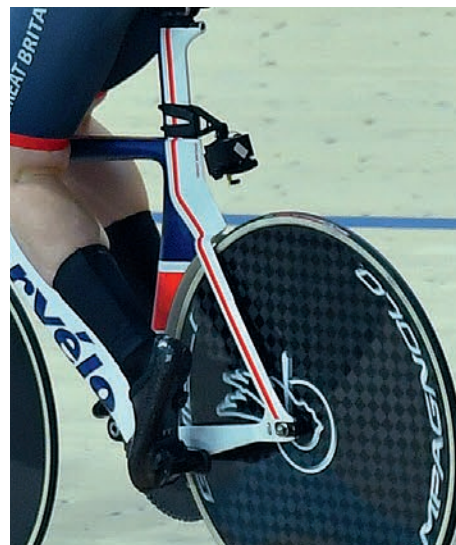

Minimizing material but maximizing efficiency in its employment allowed the Campy Tech Lab™ to not only make this new wheel lighter but, more importantly for its specific intended purpose of battling the clock, to improve its reactivity and rigidity. The new structure and design allows for solid and stable stance that transfers power towards forward motion as opposed to allowing lateral flex or torsion. The new structure, despite its lightweight construction, is also the stiffest amongst the leading disc wheel competitors according to laboratory tests.

With a front wheel tipping the scales at a scant 800 grams and the rear at an incredibly low 825 grams the Ghibli™ wheels are effectively the lightest performance solution available.



CULT™
The hub of this new wheelset was developed in a way to house Campagnolo's ultra-smooth and efficient CULT™ Ceramic Bearing Technology. It is the combination of the highest quality ceramic bearings with housing in special steel. Nine times smoother than the standard system. Eliminates oxidation and maintains performance over time.

This new wheelset was proven not only via strenuous lab testing and countless hours under athletes in training, but also in competition.

In its first official competition the Ghibli™ and its new ultra-performance construction were able to confer to **Alex Dowsett** a technological advantage that played a fundamental role in breaking the Hour Record.


A few months later, the Ghibli™ was the star of the 4 km individual pursuit thanks to **Filippo Ganna**, the nineteen-year-old world champion aided tremendously in his quest for victory by his ultra-performance Campagnolo® wheels.

The remarkable performance advantage represented by the Ghibli™ did not go unnoticed, so much so that the **Canadian and British national teams** will use them in their attempts to win Olympic medals for the team pursuit in Rio de Janeiro.

The Bora™ Ultra™ 80 track version matches perfectly to the Ghibli™ disc wheel to make an extremely competitive and race-winning combination. The two wheels work well together for all of the track disciplines involving group activity such as the points race, Madison, Elimination and Scratch thanks to the extreme lightweight of both the disc wheel (perhaps the lightest available) as well as the Bora™ Ultra™ 80's 705 grams. This spoked wheel allows for extreme agility, continuous relaunches and quick changes of direction... making it an excellent choice for certain disciplines on the track. The Bora™ Ultra™ 80 track version brings Bora™ performance to the track and with it, Campagnolo® results. Previously well known for climbing mountains and crushing time trials on the road, the Pista version of the Bora™ will be sure to climb podiums and crush records on the wooden boards of the track.



Tubular: 705 g (front)

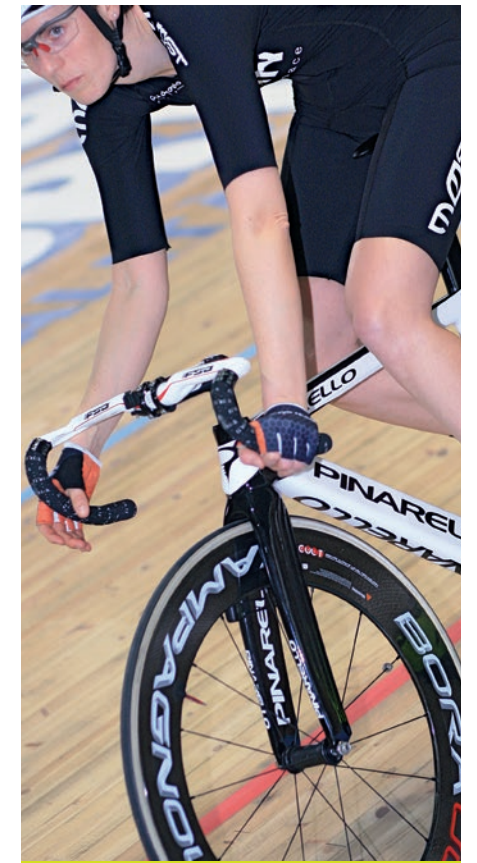

FULL CARBON HIGH PROFILE FOR 80mm TUBULAR:
provides the maximum aerodynamic penetration. Extremely high lateral wheel stiffness and reactivity.

EXCLUSIVE PRESSING SYSTEM FOR THE RIM IN UNPAINTED CARBON:
elegant polished finish is result of advanced and patented production technique. Eliminating need for paint keeps weight lower..

RDB™ RIM DYNAMIC BALANCE

SPOKES WITH AERODYNAMIC PROFILE:
provides the maximum aerodynamic penetration. Reduces aerodynamic drag saving rider energy.

SELF-LOCKING ALUMINIUM NIPPLES



BALL BEARINGS WITH CULT™ TECHNOLOGY:
the combination of the highest quality ceramic bearings with housing in special steel. Nine times smoother than the standard system. Eliminates oxidation and maintains performance over time.

CARBON FIBRE HUB:
provides a high degree of lateral stiffness and reduces weight to the minimum.

CUP AND CONE BEARINGS

ALUMINIUM AXLE



TECH DATA

Over the course of the previous pages in this catalog you can find a great deal of general information regarding every Campagnolo® product. However, if you need more specific information and technical data we have compiled an even greater resource in the following section.

Should you need yet more information please visit: www.campagnolo.com

Please note that we reserve the right to change products, surface finish and specifications at any moment without prior notice.

GROUPSETS	168
WHEELS	180
TRIATHLON / TIME-TRIAL	179
SERVICE CENTER - SALES NETWORK	186



GROUPSETS



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
SUPER RECORD™ EPS™ rear derailleur	compatible with sprocket sets 11-29, 11-32	234	cables included
SUPER RECORD™ EPS™ Ergopower™ DB controls	-	381	Pair (cables included)
SUPER RECORD™ EPS™ front derailleur	-	132	cables included
DTI™ EPS™ V4 Power Unit	-	135	cables included
DTI™ EPS™ V4 External Interface	-	33	cables included
DTI™ EPS™ V4 Internal Interface	-	11	cables excluded
SUPER RECORD™ crankset	165 mm, 170 mm, 172,5 mm, 175 mm 39-53 - 36-52 - 34-50	618	172,5 mm, 34-50 (2 bearings assembled)
SUPER RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	43	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm, BB86: (86,5x41) mm, PF30: (68x46) mm, BB386: (86,5x46) mm, BB RIGHT: (79x46) mm, BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32	266	11-29
SUPER RECORD™ chain	-	220	110 links
CAMPAGNOLO® caliper	160 mm Front 160 mm Rear 140 mm Rear	118	140 mm Rear (1 piece - pads included)
CAMPAGNOLO® rotor	160 mm 140 mm	99	140 mm (1 piece)
COMPLETE GROUPSET		2.497	2 calipers 2 rotors

EXTRA COMPONENTS	OPTIONS	CATEGORY
EPS™ V4 Power Unit Holder	for bottle cage for ø 27 mm seatpost for ø 32 mm seatpost	EPS™ V4
EPS™ Battery Charger	-	EPS™
EPS™ Power Cable	AUS CEE UK US	EPS™
RECORD™ EPS™ extension cable kit	-	EPS™ SUPER RECORD™/RECORD™
Rear Caliper Bolts	for 10-14 mm rear mount for 15-19 mm rear mount for 20-24 mm rear mount for 25-29 mm rear mount for 30-34 mm rear mount for 35-39 mm rear mount	Disc Brake (MANDATORY)
Oil	100 ml, 250 ml, 1.000 ml	Disc Brake
Bleeding Kit	-	Disc Brake
140 mm to 160 mm Rear Caliper adapter	-	Disc Brake
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm - ø 35 mm	Accessory
Front Derailleur Stiffness Increaser	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml - 750 ml - thermal	General

TECH DATA



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
SUPER RECORD™ EPS™ rear derailleur	compatible with sprocket sets 11-29, 11-32	234	cables included
SUPER RECORD™ EPS™ Ergopower™ controls	-	280	Pair (cables included)
SUPER RECORD™ EPS™ front derailleur	-	132	cables included
DTI™ EPS™ V4 Power Unit	-	135	cables included
DTI™ EPS™ V4 External Interface	-	33	cables included
DTI™ EPS™ V4 Internal Interface	-	11	cables excluded
SUPER RECORD™ crankset	165 mm, 170 mm, 172,5 mm, 175 mm 39-53 - 36-52 - 34-50	618	172,5 mm, 34-50 (2 bearings assembled)
SUPER RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	43	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm, BB86: (86,5x41) mm, PF30: (68x46) mm, BB386: (86,5x46) mm, BB RIGHT: (79x46) mm, BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32	266	11-29
SUPER RECORD™ chain	-	220	110 links
SUPER RECORD™ brakes	-	311	Pair
CAMPAGNOLO® direct mount brake	Front Rear Seat Stay	168	1 piece
COMPLETE GROUPSET		2.247	-

EXTRA COMPONENTS	OPTIONS	CATEGORY
EPS™ V4 Power Unit Holder	for bottle cage for ø 27 mm seatpost for ø 32 mm seatpost	EPS™ V4
EPS™ Battery Charger	-	EPS™
EPS™ Power Cable	AUS CEE UK US	EPS™
RECORD™ EPS™ extension cable kit	-	EPS™ SUPER RECORD™/RECORD™
RECORD™ direct mount brake	Rear Under BB	Brakes
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur Stiffness Increaser	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

GROUPSETS



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
SUPER RECORD™ rear derailleur	compatible with sprocket sets 11-29, 11-32, 11-34	181	standard hanger version
SUPER RECORD™ Ergopower™ DB controls	-	462	Pair
SUPER RECORD™ front derailleur	-	79	-
SUPER RECORD™ crankset	165 mm 170 mm 172,5 mm 175 mm 39-53 36-52 34-50	618	172,5 mm, 34-50 (2 bearings assembled)
SUPER RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	43	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32 11-34	266	11-29
SUPER RECORD™ chain	-	220	110 links
CAMPAGNOLO® caliper	160 mm Front 160 mm Rear 140 mm	118	140 mm (1 piece - pads included)
CAMPAGNOLO® 03 rotor	160 mm 140 mm	99	140 mm (1 piece)
COMPLETE GROUPSET		2.326	2 calipers 2 rotors

EXTRA COMPONENTS	OPTIONS	CATEGORY
Rear Caliper Bolts	for 10-14 mm rear mount for 15-19 mm rear mount for 20-24 mm rear mount for 25-29 mm rear mount for 30-34 mm rear mount for 35-39 mm rear mount	Disc Brake (MANDATORY)
Oil	100 ml 250 ml 1.000 ml	Disc Brake
Bleeding Kit	-	Disc Brake
140 mm to 160 mm Rear Caliper adapter	-	Disc Brake
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

TECH DATA



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
SUPER RECORD™ rear derailleur	compatible with sprocket sets 11-29, 11-32, 11-34	181	standard hanger version
SUPER RECORD™ Ergopower™ controls	-	339	Pair
SUPER RECORD™ front derailleur	-	79	-
SUPER RECORD™ crankset	165 mm 170 mm 172,5 mm 175 mm 39-53 36-52 34-50	618	172,5 mm, 34-50 (2 bearings assembled)
SUPER RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	43	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32 11-34	266	11-29
SUPER RECORD™ chain	-	220	110 links
SUPER RECORD™ brakes	-	311	Pair
CAMPAGNOLO® direct mount brake	Front Rear Seat Stay	168	1 piece
COMPLETE GROUPSET		2.062	

EXTRA COMPONENTS	OPTIONS	CATEGORY
RECORD™ direct mount brake	Rear Under BB	Brakes
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

GROUPSETS



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
RECORD™ rear derailleur	compatible with sprocket sets 11-29, 11-32, 11-34	216	standard hanger version
RECORD™ Ergopower™ DB controls	-	462	-
RECORD™ front derailleur	-	81	-
RECORD™ crankset	165 mm 170 mm 172,5 mm 175 mm 39-53 36-52 34-50	708	170 mm, 34-50 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32 11-34	266	11-29
SUPER RECORD™ chain	-	220	110 links
CAMPAGNOLO® caliper	160 mm Front 160 mm Rear 140 mm	118	140 mm (1 piece - pads included)
CAMPAGNOLO® 03 rotor	160 mm 140 mm	99	140 mm (1 piece)
COMPLETE GROUPSET		2.454	2 calipers 2 rotors

EXTRA COMPONENTS	OPTIONS	CATEGORY
Rear Caliper Bolts	for 10-14 mm rear mount for 15-19 mm rear mount for 20-24 mm rear mount for 25-29 mm rear mount for 30-34 mm rear mount for 35-39 mm rear mount	Disc Brake (MANDATORY)
Oil	100 ml 250 ml 1.000 ml	Disc Brake
Bleeding Kit	-	Disc Brake
140 mm to 160 mm Rear Caliper adapter	-	Disc Brake
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

TECH DATA



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
RECORD™ rear derailleur	compatible with sprocket sets 11-29, 11-32, 11-34	216	standard hanger version
RECORD™ Ergopower™ controls	-	343	-
RECORD™ front derailleur	-	81	-
RECORD™ crankset	165 mm 170 mm 172,5 mm 175 mm 39-53 36-52 34-50	708	170 mm, 34-50 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
SUPER RECORD™ sprockets	11-29 11-32 11-34	266	11-29
SUPER RECORD™ chain	-	220	110 links
RECORD™ brakes	-	326	Pair
CAMPAGNOLO® direct mount brake	Front Rear Seat Stay	168	1 piece
COMPLETE GROUPSET		2.200	

EXTRA COMPONENTS	OPTIONS	CATEGORY
RECORD™ direct mount brake	Rear Under BB	Brakes
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

GROUPSETS



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
CHORUS™ rear derailleur	-	220	standard hanger version
CHORUS™ Ergopower™ DB controls	-	488	Pair
CHORUS™ front derailleur	-	87	-
CHORUS™ crankset	165 mm, 170 mm, 172,5 mm, 175 mm 36-52, 34-50, 32-48	728	172,5 mm, 32-48 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
CHORUS™ sprockets	11-29 11-32 11-34	310	11-29
CHORUS™ chain	-	243	110 links
CAMPAGNOLO® caliper	160 mm Front 160 mm Rear 140 mm Rear	118	140 mm Rear (1 piece - pads included)
CAMPAGNOLO® rotor	160 mm 140 mm	99	140 mm (1 piece)
COMPLETE GROUPSET		2.605	2 calipers 2 rotors

EXTRA COMPONENTS	OPTIONS	CATEGORY
Rear Caliper Bolts	for 10-14 mm rear mount for 15-19 mm rear mount for 20-24 mm rear mount for 25-29 mm rear mount for 30-34 mm rear mount for 35-39 mm rear mount	Disc Brake (MANDATORY)
Oil	100 ml, 250 ml, 1.000 ml	Disc Brake
Bleeding Kit	-	Disc Brake
140 mm to 160 mm Rear Caliper adapter	-	Disc Brake
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur cable deviator insert	-	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

TECH DATA



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
CHORUS™ rear derailleur	-	220	standard hanger version
CHORUS™ Ergopower™ controls	-	362	Pair
CHORUS™ front derailleur	-	87	-
CHORUS™ crankset	165 mm, 170 mm, 172,5 mm, 175 mm 36-52, 34-50, 32-48	728	172,5 mm, 32-48 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
CHORUS™ sprockets	11-29 11-32 11-34	310	11-29
CHORUS™ chain	-	243	110 links
CHORUS™ brakes	-	318	Pair
DIRECT™ direct mount brake	Front Rear Seat Stay	183	1 piece
COMPLETE GROUPSET		2.308	

EXTRA COMPONENTS	OPTIONS	CATEGORY
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur cable deviator insert	-	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

GROUPSETS



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
POTENZA 11™ rear derailleur	short cage medium cage	206	short cage
POTENZA 11™ DB Ergopower™ controls	-	504	Pair
POTENZA 11™ front derailleur	-	94	-
POTENZA 11™ crankset	170 mm 172,5 mm 175 mm 39-53 36-52 34-50	801	170 mm, 34-50 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
CAMPAGNOLO 11™ sprockets	11-25 11-27 11-29 11-32 12-27	251	11-25
CAMPAGNOLO 11™ chain	-	256	114 links
CAMPAGNOLO® caliper	160 mm Front 160 mm Rear 140 mm Rear	118	140 mm Rear (1 piece - pads included)
CAMPAGNOLO® rotor	160 mm 140 mm	99	140 mm (1 piece)
COMPLETE GROUPSET		2.609	2 calipers 2 rotors

EXTRA COMPONENTS	OPTIONS	CATEGORY
Rear Caliper Bolts	for 10-14 mm rear mount for 15-19 mm rear mount for 20-24 mm rear mount for 25-29 mm rear mount for 30-34 mm rear mount for 35-39 mm rear mount	Disc Brake (MANDATORY)
Oil	100 ml 250 ml 1.000 ml	Disc Brake
Bleeding Kit	-	Disc Brake
140 mm to 160 mm Rear Caliper adapter	-	Disc Brake
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur cable deviator insert	-	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

TECH DATA



COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
POTENZA 11™ rear derailleur	short cage medium cage	206	short cage
POTENZA 11™ Ergopower™ controls	-	372	Pair
POTENZA 11™ front derailleur	-	94	-
POTENZA 11™ crankset	170 mm 172,5 mm 175 mm 39-53 36-52 34-50	801	170 mm, 34-50 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
CAMPAGNOLO 11™ sprockets	11-25 11-27 11-29 11-32 12-27	251	11-25
CAMPAGNOLO 11™ chain	-	256	114 links
POTENZA 11™ brakes	-	319	Pair
DIRECT™ direct mount brake	Front Rear Seat Stay	183	1 piece
COMPLETE GROUPSET		2.339	

EXTRA COMPONENTS	OPTIONS	CATEGORY
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur cable deviator insert	-	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

GROUPSETS

CENTAUR™

RIM BRAKE

COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
CENTAUR™ rear derailleur	-	230	short cage
CENTAUR™ Ergopower™ controls	-	373	Pair
CENTAUR™ front derailleur	-	103	-
CENTAUR™ crankset	170 mm 172,5 mm 175 mm 36-52 34-50	875	170 mm, 34-50 (2 bearings assembled)
RECORD™ ULTRA-TORQUE™ threaded cups	ITA: 70x (36x24 tpi) BSA: 68x (1,37"x24 tpi)	45	BSA
ULTRA-TORQUE™ press-fit cups	BB30: (68x42) mm BB86: (86,5x41) mm PF30: (68x46) mm BB386: (86,5x46) mm BB RIGHT: (79x46) mm BB30A: (73x42) mm	40	BB86
CENTUAR sprockets	11-29 11-32 12-32	291	11-29
CAMPAGNOLO 11™ chain	-	256	114 links
CENTAUR™ brakes	-	325	Pair
DIRECT™ direct mount brake	Front Rear Seat Stay	183	1 piece
COMPLETE GROUPSET		2.493	

EXTRA COMPONENTS	OPTIONS	CATEGORY
Chain Guard	for braze-on for ø 32/35 clamp	Accessory
Front Derailleur Clamp	ø 32 mm ø 35 mm	Accessory
Front Derailleur cable deviator insert	-	Accessory
Front Derailleur barrel adjuster	-	Accessory
RECORD™ Headset	-	General
RECORD™ front hub	-	General
RECORD™ rear hub	-	General
SUPER RECORD™ Bottle cage	-	General
SUPER RECORD™ Bottle	550 ml 750 ml thermal	General

TECH DATA





INTEGRATED CUPS

Uniquely compatible with all the frames on the market.

Thanks to accurate design that meets client needs, **Campagnolo® cranksets can in fact be fitted to any type of frame**: from the **standard Italian to English types**, to **Press-Fit bottom brackets of BB86 86.5x41, BB30 68x42, PF30 68x46, BB386 86.5x46, BB30 68x42, BB30A 73x42 and BB RIGHT 79x46 with new design to improve coupling with Press-Fit bottom brackets on the market**.

This means the well-known advantages of stiffness, lightness and performance over time typical of Campagnolo® cranksets remain unaltered. This solution offers many advantages, one of which is the ability to change frames without having to purchase a new crankset. This allows Campagnolo® to maintain the tried, tested and proven geometries and designs of the Ultra-Torque™ crankset without having to modify the crankset itself for the wide array of standards available currently.

Campagnolo®'s integrated cups, available for Ultra-Torque™ cranksets, have the same functionality as other systems but with the added technical advantage of maintaining the widest stance possible for the bearings. This reduces lateral forces acting on the bearings and makes for a smoother and more reactive performance that is more durable over time.

ULTRA TORQUE™	THREAD	
	ITA	BSA
	70x (36x24 tpi)	68x (1,37"x24 tpi)
<i>SUPER RECORD™</i>		
	OC12-SRI	OC12-SRG
<i>RECORD™</i>		
<i>CHORUS™</i>		
<i>POTENZA™</i>		
<i>CENTAUR™</i>		
	OC12-REI	OC12-REG

ULTRA TORQUE™	PRESS-FIT					
	BB30	BB30A	BB86	PF30	BB RIGHT	BB386
	68x42	73x42	86,5x41	68x46	79x46	86,5x46
<i>SUPER RECORD™</i>						
<i>RECORD™</i>						
<i>CHORUS™</i>						
<i>POTENZA™</i>						
<i>CENTAUR™</i>						
	IC15-RE42	IC19-UT73	IC15-RE41	IC15-RE46	IC15-UTR51E	IC15-UT386

TRIATHLON / TIME-TRIAL

12x2 SPEED™

COMPONENT	OPTIONS	WEIGHT [g]	WEIGHT REFERENCE
SUPER RECORD™ TT EPS™ shifting levers	-	98	Pair
SUPER RECORD™ TT EPS™ brake levers	-	110	Pair
TT DTI™ EPS™ V4 interface	-	45	cables included

WHEELS

TECH DATA

ROAD - RIM BRAKE

AERO CARBON WHEELS

	NOMINAL WEIGHT [g]*	RIM MATERIAL	RIM SECTION: HEIGHT/WIDTH - mm (NOMINAL)	ULTRA-FIT™	LABELS	REQUIRES RIM TAPE	RIM FINISHING	NUMBER OF SPOKES		DYNAMIC BALANCE	SPOKES MATERIAL	SPOKE TYPE	DIFFERENTIAL SPOKES R/L	NUT/NIPPLE MATERIAL	Ø L.D. (mm)	HUB BODY MATERIAL	CUPS & CONES BEARINGS	BEARINGS VERSION	HUB FINISHING	SPOKE ANTI-ROTATION SYSTEM	COMPATIBILITY
BORA™ ULTRA™ TT rear tub.	864	carbon	D/20		B		carb				carbon				130	alu	•	C	black		9/10/11/12
BORA™ ULTRA™ TT rear tub. (HG)	864	carbon	D/20		B		carb				carbon				130	alu	•	C	black		9/10/11
BORA™ WTO 77 2-Way Fit™ front	755	carbon	77/26,5	•	B		UD	16		RDB	SS	UAE DB		alu	130	alu	•	C	black	•	
BORA™ WTO 60 2-Way Fit™ front	688	carb	60/26,5	•	B/D		UD	18		RDB	SS	UAE DB		alu	100	alu	•	U	black	•	
BORA™ WTO 60 2-Way Fit™ rear	859	carb	60/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ WTO 60 2-Way Fit™ rear (HG)	859	carb	60/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11
BORA™ WTO 45 2-Way Fit™ front	657	carb	45/26,5	•	B/D		UD	18		RDB	SS	UAE DB		alu	100	alu	•	U	black	•	
BORA™ WTO 45 2-Way Fit™ rear	839	carb	45/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ WTO 45 2-Way Fit™ rear (HG)	839	carb	45/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11
BORA™ WTO 33 2-Way Fit™ front	593	carb	33/26,5	•	B/D		UD	18		RDB	SS	UAE DB		alu	100	alu	•	U	black	•	
BORA™ WTO 33 2-Way Fit™ rear	795	carb	33/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ WTO 33 2-Way Fit™ rear (HG)	795	carb	33/26,5	•	B/D		UD	21/G3™		RDB	SS	UAE DB		alu	130	alu	•	U	black	•	9/10/11

PERFORMANCE CARBON WHEELS

BORA™ ULTRA™ 35 front tub.	480	carb	35/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	carb	•	C	blk/carb	•	
BORA™ ULTRA™ 35 rear tub.	690	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11/12
BORA™ ULTRA™ 35 rear tub. (HG)	690	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11
BORA™ ULTRA™ 50 front tub.	520	carb	50/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	carb	•	C	carb	•	
BORA™ ULTRA™ 50 rear tub.	695	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11/12
BORA™ ULTRA™ 50 rear tub. (HG)	695	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11
BORA™ ONE 35 front tub.	505	carb	35/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 35 rear tub.	710	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ ONE 35 rear tub. (HG)	710	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11
BORA™ ONE 50 front tub.	545	carb	50/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 50 rear tub.	720	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ ONE 50 rear tub. (HG)	720	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11
BORA™ ULTRA™ 35 front cl.	575	carb	35/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	carb	•	C	blk/carb	•	
BORA™ ULTRA™ 35 rear cl.	785	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11/12
BORA™ ULTRA™ 35 rear cl. (HG)	785	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11
BORA™ ULTRA™ 50 front cl.	630	carb	50/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	carb	•	C	carb	•	
BORA™ ULTRA™ 50 rear cl.	805	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11/12
BORA™ ULTRA™ 50 rear cl. (HG)	805	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	carb	•	C	blk/carb	•	9/10/11
BORA™ ONE 35 front cl.	600	carb	35/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 35 rear cl.	805	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ ONE 35 rear cl. (HG)	805	carb	35/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11
BORA™ ONE 50 front cl.	655	carb	50/24,2		B/D		carb	18		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 50 rear cl.	830	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11/12
BORA™ ONE 50 rear cl. (HG)	830	carb	50/24,2		B/D		carb	21/G3™		RDB	SS	AE DB		alu	130	alu	•	U	black	•	9/10/11

KEY

DB=Butted - AE=Aero - UAE=Ultra Aero - SS=Stainless steel - BR=Brass - S=steel - U=USB™ - C=CULT™ - SDB=Spoke Dynamic Balance - RDB=Rim Dynamic Balance
B=Bright - D=Dark - BLK SAT=black satinized

ROAD - RIM BRAKE

WHEELS

TECH DATA

NOMINAL WEIGHT [g]*	RIM MATERIAL	RIM SECTION: HEIGHT/WIDTH - mm (NOMINAL)	ULTRA-FIT™	LABELS	REQUIRES RIM TAPE	RIM FINISHING	NUMBER OF SPOKES	DYNAMIC BALANCE	SPOKES MATERIAL	SPOKE TYPE	DIFFERENTIAL SPOKES R/L	NIPPLE MATERIAL	O.L.D. [mm]	HUB BODY MATERIAL	CUPS & CONES BEARINGS	BEARINGS VERSION	HUB FINISHING	SPOKE ANTI-ROTATION SYSTEM	COMPATIBILITY

ALUMINIUM WHEELS

SHAMAL™ MILLE™ front cl.	638	alu	24-27/22		D	blk sat	16	RDB	alu	AE DB		alu	100	alu/carb	•	U	blk/carb	•	
SHAMAL™ MILLE™ rear cl.	821	alu	27-30/22		D	blk sat	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11/12
SHAMAL™ MILLE™ rear cl. (HG)	821	alu	27-30/22		D	blk sat	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11
SHAMAL™ ULTRA™ front cl.	623	alu	24-27/22		B	black	16	RDB	alu	AE DB		alu	100	alu/carb	•	U	blk/carb	•	
SHAMAL™ ULTRA™ rear cl.	826	alu	27-30/22		B	black	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11/12
SHAMAL™ ULTRA™ rear cl. (HG)	826	alu	27-30/22		B	black	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11
SHAMAL™ ULTRA™ 2-Way Fit™ front	641	alu	24-27/22	•	B	black	16	RDB	alu	AE DB		alu	100	alu/carb	•	U	blk/carb	•	
SHAMAL™ ULTRA™ 2-Way Fit™ rear	834	alu	27-30/22	•	B	black	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11/12
SHAMAL™ ULTRA™ 2-Way Fit™ rear (HG)	834	alu	27-30/22	•	B	black	21/G3™	RDB	alu	AE DB		alu	130	alu/carb	•	U	blk/carb	•	9/10/11
ZONDA™ front cl.	678	alu	24-27/22		B	black	16	RDB	SS	AE DB		BR	100	alu	•	S	black	•	
ZONDA™ rear cl.	862	alu	27-30/22		B	black	21/G3™	RDB	SS	AE DB		BR	130	alu	•	S	black	•	9/10/11/12
ZONDA™ rear cl. (HG)	862	alu	27-30/22		B	black	21/G3™	RDB	SS	AE DB		BR	130	alu	•	S	black	•	9/10/11
SCIROCCO™ front cl.	820	alu	35/22		B	•	black	16		SS	AE DB	alu	100	alu		S	black	•	
SCIROCCO™ rear cl.	935	alu	35/22		B	•	black	21/G3™		SS	AE DB	alu	130	alu		S	black	•	9/10/11/12
SCIROCCO™ rear cl. (HG)	935	alu	35/22		B	•	black	21/G3™		SS	AE DB	alu	130	alu		S	black	•	9/10/11
KHAMSIN™ front cl.	813	alu	24/22		B	•	black	18		S		BR	100	alu		S	black		
KHAMSIN™ rear cl.	993	alu	27,5/22		B	•	black	24/G3™		S/SS	•	BR	130	alu		S	black		9/10/11/12
KHAMSIN™ rear cl. (HG)	993	alu	27,5/22		B	•	black	24/G3™		S/SS	•	BR	130	alu		S	black		9/10/11
CALIMA™ front cl.	789	alu	24/22		B	•	black	18		S		BR	100	alu		S	black		
CALIMA™ rear cl.	1037	alu	24/22		B	•	black	27/G3™		S		BR	130	alu		S	black		9/10/11/12
CALIMA™ rear cl. (HG)	1089	alu	24/22		B	•	black	27/G3™		S		BR	130	alu		S	black		9/10/11

TRIATHLON - TIME TRIAL

BORA™ ULTRA™ TT rear tub.	864	carbon	D/20		B	carb			carbon				130	alu	•	C	black		9/10/11/12
BORA™ ULTRA™ TT rear tub. (HG)	864	carbon	D/20		B	carb			carbon				130	alu	•	C	black		9/10/11

PISTA

GHIBLI™ front tub. track	800	carb	D/20										100	alu	•	C			
GHIBLI™ rear tub. track	825	carb	D/20										120	alu	•	C			
BORA™ ULTRA™ 80 front tub. track	705	carb	80/20		B	carb	16	RDB	SS	AE DB		alu	100	carb	•	C	blk/carb	•	

KEY

DB=Butted - **AE**=Aero - **UAE**=Ultra Aero - **SS**=Stainless steel - **BR**=Brass - **S**=steel - **U**=USB™ - **C**=CULT™ - **SDB**=Spoke Dynamic Balance - **RDB**=Rim Dynamic Balance
B=Bright - **D**=Dark - **BLK SAT**=black satinized

* Average weight - does not include the quick-release and the rim-tape - wheel weight may vary depending on the tolerance of the production process.

ROAD - DISC BRAKE

WHEELS

TECH DATA

AERO CARBON WHEELS

	NOMINAL WEIGHT [g]*	RIM MATERIAL	RIM SECTION: HEIGHT/WIDTH - mm	ULTRA-FIT™	LABELS	REQUIRES RIM TAPE	RIM FINISHING	NUMBER OF SPOKES		DYNAMIC BALANCE	SPOKES MATERIAL	SPOKE TYPE	DIFFERENTIAL SPOKES R/L	NIPPLE MATERIAL	O.L.D. [mm]	HUB BODY MATERIAL	CUPS & CONES BEARINGS	BEARINGS VERSION	HUB FINISHING	SPOKE ANTI-ROTATION SYSTEM	COMPATIBILITY
BORA™ WTO 45 DB 2-Way Fit™ front	708	carb	45/26,5	•	D		UD	21/G3™		RDB	SS	UAE DB		alu	100	alu	•	U	black	•	
BORA™ WTO 45 DB 2-Way Fit™ rear	812	carb	45/26,5	•	D		UD	21/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ WTO 45 DB 2-Way Fit™ rear (HG)	812	carb	45/26,5	•	D		UD	21/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	9/10/11
BORA™ WTO 45 DB 2-Way Fit™ rear (XDR)	805	carb	45/26,5	•	D		UD	21/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	12
BORA™ WTO 33 DB 2-Way Fit™ front	675	carb	33/26,5	•	D		UD	24/G3™		RDB	SS	UAE DB		alu	100	alu	•	U	black	•	
BORA™ WTO 33 DB 2-Way Fit™ rear	775	carb	33/26,5	•	D		UD	24/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ WTO 33 DB 2-Way Fit™ rear (HG)	775	carb	33/26,5	•	D		UD	24/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	9/10/11
BORA™ WTO 33 DB 2-Way Fit™ rear (XDR)	768	carb	33/26,5	•	D		UD	24/G3™		RDB	SS	UAE DB		alu	142	alu	•	U	black	•	12

PERFORMANCE CARBON WHEELS

BORA™ ONE 35 DB front cl.	690	carb	35/23,5		B/D	carb	24/G3™		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 35 DB rear cl.	793	carb	35/23,5		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ ONE 35 DB rear cl. (HG)	793	carb	35/23,5		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11
BORA™ ONE 35 DB rear cl. (XDR)	793	carb	35/23,5		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	12
BORA™ ONE 35 DB front tub.	585	carb	35/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 35 DB rear tub.	691	carb	35/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ ONE 35 DB rear tub. (HG)	691	carb	35/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11
BORA™ ONE 50 DB front cl.	702	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 50 DB rear cl.	805	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ ONE 50 DB rear cl. (HG)	805	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11
BORA™ ONE 50 DB rear cl. (XDR)	798	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	12
BORA™ ONE 50 DB front tub.	622	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	100	alu	•	U	black	•	
BORA™ ONE 50 DB rear tub.	726	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11/12
BORA™ ONE 50 DB rear tub. (HG)	726	carb	50/24,2		B/D	carb	24/G3™		RDB	SS	AE DB		alu	142	alu	•	U	black	•	9/10/11

ALUMINIUM WHEELS

SHAMAL™ ULTRA™ DB 2-Way Fit™ front	738	alu	24-27/22	•	B/D	black	21/G3™		RDB	alu	AE DB		alu	100	alu/carb	•	U	blk/carb	•	
SHAMAL™ ULTRA™ DB 2-Way Fit™ rear	854	alu	27-30/22	•	B/D	black	21/G3™		RDB	alu	AE DB		alu	142	alu	•	U	black	•	9/10/11/12
SHAMAL™ ULTRA™ DB 2-Way Fit™ rear (HG)	842	alu	27-30/22	•	B/D	black	21/G3™		RDB	alu	AE DB		alu	142	alu	•	U	black	•	9/10/11
ZONDA™ DB front cl.	786	alu	26-28/22		B	black	21/G3™		RDB	SS	AE DB		alu	100	alu	•	S	black	•	
ZONDA™ DB rear cl.	889	alu	26-28/22		B	black	21/G3™		RDB	SS	AE DB		alu	135-142	alu	•	S	black	•	9/10/11/12
ZONDA™ DB rear cl. (HG)	889	alu	26-28/22		B	black	21/G3™		RDB	SS	AE DB		alu	135-142	alu	•	S	black	•	9/10/11
SCIROCCO™ DB 2-Way Fit™ ready front	819	alu	33/23,5	•	B	• black	21/G3™			SS			alu	100	alu		S	black		
SCIROCCO™ DB 2-Way Fit™ ready rear	920	alu	33/23,5	•	B	• black	21/G3™			SS			alu	135-142	alu		S	black		9/10/11/12
SCIROCCO™ DB 2-Way Fit™ ready rear (HG)	920	alu	33/23,5	•	B	• black	21/G3™			SS			alu	135-142	alu		S	black		9/10/11

KEY

DB=Butted - AE=Aero - UAE=Ultra Aero - SS=Stainless steel - BR=Brass - S=steel - U=USB™ - C=CULT™ - SDB=Spoke Dynamic Balance - RDB=Rim Dynamic Balance
B=Bright - D=Dark - BLK SAT=black satinized

* Average weight - does not include the quick-release and the rim-tape - wheel weight may vary depending on the tolerance of the production process.

CAMPAGNOLO® SERVICE CENTER

The Service Center is the reference point for all Campagnolo® dealers and its aim is to provide an adequate after-sales service to Campagnolo® users. Service Centers are a territorial extension of Campagnolo srl and work exclusively with dealers, no exceptions made. The Service Centers handle two activities: After-sales Service and Spare Parts Service.

The After-sales Service provides technical assistance for products under guarantee or otherwise, enabling cyclists to enjoy the first-class characteristics of Campagnolo® products for long, without forfeiting safety, performance and endurance. The Spare Parts Service handles the distribution of spare parts. Campagnolo® possesses a large inventory of spare parts and is able to replenish its distribution system adequately in relatively short times.

We therefore advise you to refer to your Campagnolo® dealer for any expert action required by your bikes - these dealers are the only ones supported by the constant, skilled collaboration of Campagnolo® Service Centers.

TECHNICAL INFORMATION

ITALY (CENTRAL) Tel. +39-0444-225600 Fax: +39-0444-225606	FRANCE Tel. +33-477-554449 Fax: +33-477-556345	GERMANY Tel. +49-214-206953-20 Fax: +49-214-206953-15
SPAIN Tel. +34-945-217195 Fax: +34-945-217198	U.S.A. Tel. +1-760-9310106 Fax: +1-760-9310991	JAPAN Tel. +81-45-264-2780 Fax: +81-45-241-8030



CAMPAGNOLO® SERVICE CENTER list at www.campagnolo.com/WW/en/Support/service_center



CAMPY CARE NEED HELP?

Go to a Pro-Shop. They'll be able to offer you all the assistance you need.

[FIND THE NEAREST STORE](#)

Didn't you find stores near your home?
Please contact the service center in your country.

CAMPAGNOLO® SALES NETWORK

HEADQUARTERS

CAMPAGNOLO S.R.L.
Via della Chimica, 4
36100 Vicenza - ITALY
Tel. +39-0444-225500
Fax: +39-0444-225400
E-mail: sales@campagnolo.com

BRANCH OFFICES

FRANCE
CAMPAGNOLO FRANCE SAS
ZA du Tissot
42530 St GENEST - LERPT
Tel. +33-477-556305
Fax: +33-477-556345
E-mail: campagnolo@campagnolo.fr

JAPAN
CAMPAGNOLO JAPAN LTD
65 Yoshidamachi, Naka-ku,
YOKOHAMA
231-0041
Tel. +81-45-264-2780
Fax: +81-45-241-8030
E-mail: info@campagnolo.jp

TAIWAN
PRIMATEK LTD
No. 1, Gongyequ 37th Rd.,
Xitun Dist.,
Taichung City 407, Taiwan R.O.C.
Tel. +886-4-23506831
Fax: +886-4-23596764

BRANCH OFFICES

GERMANY
CAMPAGNOLO DEUTSCHLAND
GMBH
Alte Garten 62
51371 LEVERKUSEN
Tel. +49-214-206953-0
Fax: +49-214-206953-15
E-mail: campagnolo@campagnolo.de

SPAIN
CAMPAGNOLO IBERICA S.L.
Avda. de Los Huetos 46.
Pab. 31 - 01010 VITORIA
Tel. +34-945-217195
Fax: +34-945-217198
E-mail: campagnolo@campagnolo.es

UNITED STATES
CAMPAGNOLO NORTH AMERICA
INC.
5431 Avenida Encinas, Suite C -
CARLSBAD CA 92008 - U.S.A.
Tel. +1-760-9310106
Fax: +1-760-9310991
E-mail: info@campagnolona.com

AGENT

BENELUX
INTERNATIONAL
CYCLE CONNECTION I.C.C.
Communicatielaan 5A
4538 BV TERNEUZEN
NETHERLAND
Tel. +31 (0)115 649321
Fax: +31 (0)115 649110
E-mail: info@i-c-c.nl
Web: www.i-c-c.nl



CAMPAGNOLO® SALES NETWORK list at www.campagnolo.com/WW/en/Support/sales_network



[FIND THE NEAREST STORE](#)

Didn't you find stores near your home?
Please contact the service center in your country.



CAMPAGNOLO S.R.L.

Via della Chimica, 4
36100 Vicenza - ITALY
Phone: +39 0444 225500
Fax: +39 0444 225400

www.campagnolo.com

Campagnolo®, Campy™, Super Record™, Record™, Chorus™, Athena™, Potenza 11™, EPS™, CTT™, Centaur™, Veloce™, Mirage™, Xenon™, MyCampy™, MyGarage™, MyEPS™, MySessions™, ESP™, ESP™ ACTUATION SYSTEM™, Ultra-Shift™, Vari-Cushion™, No-Bulge™, OS-Fit™, Ultra-Link™, CULT™, USB™, XPSS™, MPST™, Power Torque System™, Power Torque +™, Power-Shift™, Embrace Technology™, S2 System™, CSD™, AMS™, BE 11™, Revolution 11™, Campy Tech Lab™, 2-Way Fit™, Ultra-Fit™ Tubeless, 3Diamant™, Hyperon™, Neutron™, Proton™, Eurus™, Zonda™, Scirocco™, Vento™, Vento Asymmetric™, Bora™, Ghibli™, Pista™, Khamsin™, Khamsin Asymmetric™, Calima™, Shamal™, Bullet™, Time Trial™, Ergobrain™, Symmetric Action™, Z-shape™, M-brace™, Even-O™, Superlative™, Floating-Link-Action™, HD-Link™, HD-L™, Exa-Drive™, Ultra-Drive™, Pro-Fit™, Pro-Fit PLUS™, Differential brakes™, Threadless™, Hiddenset™, Hiddenset TTC™, TTC™, Ergopower™, BB System™, C10™, C9™, ED™, UD™, Ultra Narrow™, Over-Torque™, UT™, Ultra-Torque™, Over-Torque™ Technology, Ultra-Hollow™, Skeleton™, Quick Shift™, QS™, Escape™, Infinite™, Champ Triple™, Race Triple™, Comp Triple™, HPW™, Mega-G3™, G3™, Grouped Spokes™, DPRO™, Dual Profile™, Ultralinear-Geometry™, Ultralinear™, Differential rims™, Differential spokes™, Ultra™, Ultra Aero™, DRSC™, RDB™, Spokes Anti-Roation System™, Spoke Dynamic Balance™, AC3™, Comp Ultra™, Comp One™, 3Diamant™, Dynamic Balance™, Full Carbon™, Multidirectional™, Unidirectional™, AC-H™, AC-S™, SC-S™, Big™, Miro™, Pro-Shop™, Tecnologia ed Emozione™, Pure Performance™, are Campagnolo Srl trademarks.

QR Code® is registered trademarks of DENSO WAVE INCORPORATED.
Copyright(C) 2000-2010
DENSO WAVE INCORPORATED
All right reserved

Credits:

Racing photos: © 2019 Getty Images
Hour Record photos: © Lotto Soudal-Facepeeters

